



5G-HUB QCA4020 Multi-Mode Dual Band WiFi Bluetooth Zigbee Instructions

[Home](#) » [5G HUB](#) » 5G-HUB QCA4020 Multi-Mode Dual Band WiFi Bluetooth Zigbee Instructions 



Contents

- 1 MULTI-MODE WIFI, BLUETOOTH, ZIGBEE
- 2 Purpose of the Document
- 3 Document History
- 4 1 Introduction
 - 4.1 Feature Highlights
 - 4.2 Specifications
- 5 2 QCA4020 miniPCle Layout
- 6 3 QCA4020 miniPCle Pin Out
- 7 4 How to flash Image to QCA4020 miniPCle
 - 7.1 4.1 Method 1: Through Emergency Download Mode (EDL)
 - 7.2 4.2 Method 2: Through JTAG
- 8 5 QCA4020 Pin Out
- 9 6 Software Tools to be Installed
- 10 7 Setting Up the Software Development Environment
 - 10.1 7.1 Python
 - 10.2 7.2 Java
 - 10.3 7.3 OpenOCD
 - 10.4 7.4 GNU ARM Toolchain
 - 10.5 7.5 Setup OpenOCD Plugin Usage with Eclipse
- 11 8 Importing “Hello World” Application
- 12 9 Building “Hello World” Application
- 13 10 Flash the Application to the QCA4020 miniPCle using USB
- 14 11 Flash the Application to the QCA4020 miniPCle using JTAG
- 15 12 Connecting QCA4020 to Serial Terminal Through UART
- 16 13 Using Serial Terminal
- 17 14 QCLI Demo Application
- 18 Documents / Resources
 - 18.1 References
- 19 Related Posts

MULTI-MODE WIFI, BLUETOOTH, ZIGBEE

QCA4020: Multi-Mode Dual Band WiFi, Bluetooth 5, and ZigBee (802.15.4)



Purpose of the Document

The purpose of this document is to explain the QCA4020 which is multi-mode dual band WiFi, Bluetooth 5, and ZigBee (802.15.4). This document contains the features of the QCA4020 and how to configure it.

Document History

Version	Author	Date	Description
A	5G HUB	8.16.2021	Initial Document

1 Introduction

This is a miniPCIe card that supports multi-mode intelligent connectivity. It supports dual-band WiFi, Bluetooth 5, and ZigBee. It is based on Qualcomm QCA4020 System-On-Chip (SoC). It has low power SoC that integrates a Cortex M4F for application processing, Cortex M0 for network stack processing, and a separate processor for Wi-Fi stack designed to enable a highly concurrent multiple radio solution.

The QCA4020 SDK pre-integrates support for advanced security features and multiple software and cloud ecosystems.

Designed to address IoT fragmentation and support for interoperability, this solution is ideal for multiple IoT industries from home control and automation, networking, home entertainment and smart cities.

Feature Highlights

- Multi-mode SoC supporting dual band Wi-Fi, Bluetooth 5, and IEEE 802.15.4 concurrently
- Dedicated processor for Bluetooth LE LC and 15.4 MAC
- Dedicated processor for 802.11 a/b/g/n
- Zigbee 3.0 and OpenThread support
- Isolated power islands for low power operation
- Advanced hardware-based security featuring secure boot, trusted execution environment, encrypted storage, key provisioning and application-level security
- Comprehensive set of peripherals and interfaces: SPI, I2C, UART, HS-UART, ADC and GPIOs
- Integrated sensor hub for post-processing designed to enable low power sensor use cases
- Small package size allows for optimized form factors
- 300+KB RAM reserved for applications
- Bluetooth radio details: v5.0 with PA =+4dBm/+10dBm (for Long Range)
- 802.15.4 radio details: 2006 compliant, 15.4e, 2.4GHz DSSS +4dBm/+21dBm (for Long Range)

Specifications

Wi-Fi

Standards: 802.11a/b/g, 802.11n

Wi-Fi Spectral Bands: 2.4 GHz, 5 GHz

Peak Speed: 150 Mbps

MIMO Configuration: 1×1 (1-stream)

Bluetooth

Bluetooth Specification Version: Bluetooth 5.0

Bluetooth Technology: Qualcomm Bluetooth mesh, Bluetooth Low Energy

802.15.4

LR-WPAN Protocol: Thread, Zigbee

USB

USB Version: USB 2.0

CPU

CPU Clock Speed: Up to 128 MHz

CPU Cores: Arm Cortex-M4F CPU, Arm Cortex-M0 CPU, Tensilica Xtensa


Security Support

Security Features: Application-level Security, Hardware-based Crypto Engine, Key Provisioning Security, Qualcomm® Trusted Execution Environment (TEE), Secure Boot, Secure Storage, Software Image Encryption, True Random Number Generator

Wi-Fi Security: WPS Interface

2 QCA4020 miniPCle Layout

The following figure explains the QCA4020 miniPCle. It has two headers P1 and P2 which exposes many of the GPIOs and interface of the QCA4020. In addition, it has a JTAG interface for debugging and flashing image. In addition, it has Emergency Download Mode (EDL) jumper header.

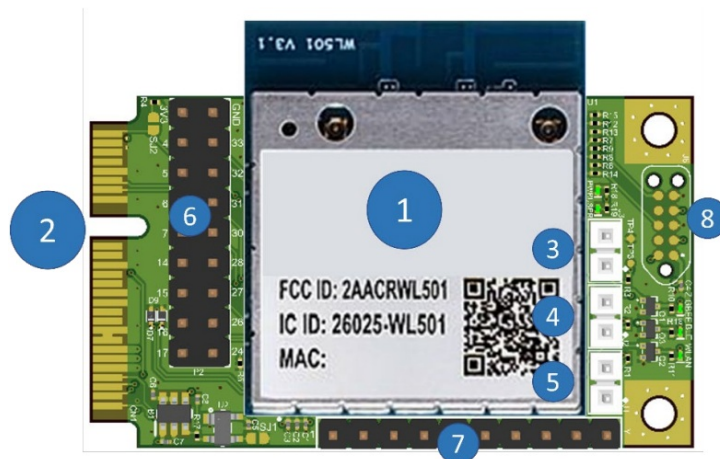

- 1- QCA402 M20 module
- 2- miniPCle Interface
- 3- J3 (EDL)
- 4- J2 (configure JTAG interface)
- 5- J1 (Force JTAG)
- 5- miniPCle socket
- 6- P2 Header
- 7- P1 Header
- 8- JTAG Interface

Figure 1: QCA4020 miniPCle Layout.

The following figure shows the size and dimension of the QCA4020 miniPCle.

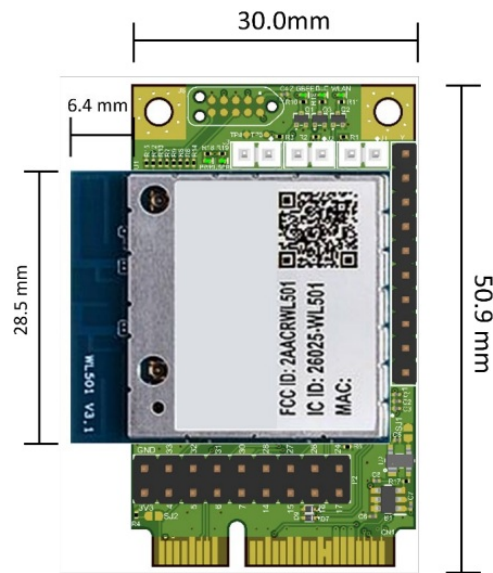


Figure 2: QCA4020 miniPCle Physical Dimension.

3 QCA4020 miniPCle Pin Out

The QCA4020 is miniPCle card and interface. The following figure shows the pin out of the miniPCle:

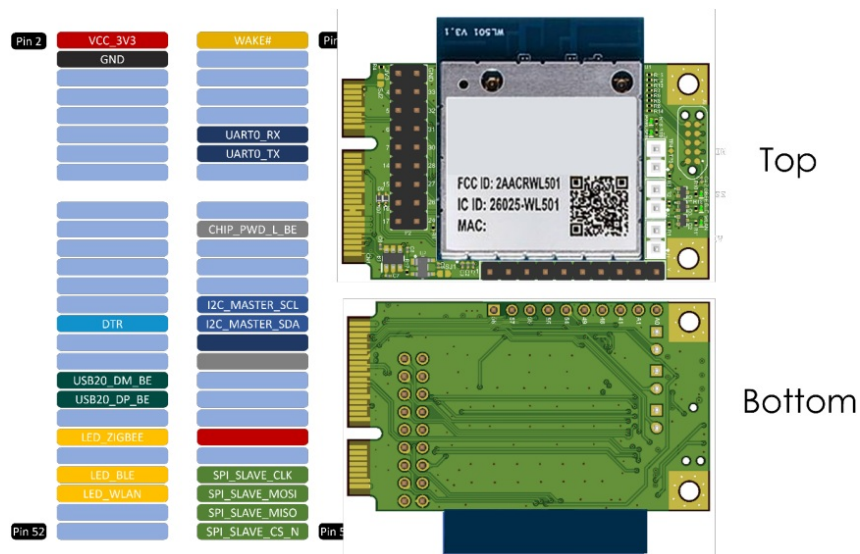


Figure 3: QCA4020 miniPCle Pin out.

To use the miniPCle module, you can use USB adaptor (also know as Raspberry PI HAT). The miniPCle pin mapping as in the table below. If the miniPCle is used with he Raspberry PI HAT, miniPCle pins are mapped to Raspberry PI for additional functionality and interface to Raspberry PI.

Table 1: QCA4020 miniPCle Interface.

PIN #	QCA4020	QCA4020 GPIO PIN#	Raspberry PI PIN#
1	WAKE-UP	GPIO29_BE	

2	VCC_3V3		
3			
4			
5			
6			
7			
8			
9			
10			
11	M0&M4_UART0_RX	GPIO8_BE	GPIO 14 (8)
12			
13	M0&M4_UART0_TX	GPIO9_BE	GPIO 15 (10)
14			
15			
16			

17			
18			
19			
20			
21			
22	CHIP_PWD_L_BE	T4	
23			
24			
25			
26			
27			
28			
29			
30	I2C0_MASTER_SCL	GPIO10_BE	GPIO 19 (35)
31	DTR		33
32	I2C0_MASTER_SDA	GPIO11_BE	GPIO 18 (12)

33			
34			
35			
36	USB20_DM_BE	USB20_DM_BE	
37			
38	USB20_DP_BE	USB20_DP_BE	
39			
40			
41			
42	LED_ZIGBEE	GPIO13_BE	
43			
44			
45	SPI_SLAVE_CLK	GPIO18_BE	GPIO 11 (23)
46	LED_BLE	GPIO60_BE	
47	SPI_SLAVE_MOSI	GPIO23_BE	GPIO 9 (21)

48	LED_WLAN	GPIO12_BE	
49	SPI_SLAVE_MISO	GPIO20_BE	GPIO 10 (19)
50			
51	SPI_SLAVE_CS_N	GPIO19_BE	GPIO 8 (24)
52			

4 How to flash Image to QCA4020 miniPCle

Flashing the image o the QCA4020 miniPCle can be done using either of the following two methods:

4.1 Method 1: Through Emergency Download Mode (EDL)

In this step up, user can do the following:

- 1- Connect J3 (PIN 1 and PIN 2). This is the GPIO22_BE used for EDL.
- 2- Connect the USB cable between the PC and the USB port of M20.

4.2 Method 2: Through JTAG

In this step up, user can do the following:

- 1- Connect J1 (PIN 1 and PIN 2). This is the GPIO20_BE which used to force JTAG mode
- 2- Connect JTAG cable to the JTAG 10-PIN header which includes the signals **TCK, TDI, TDO, TMS**

Follow normal procedure to flash the *.elf file over the JTAG interface.

QCA4020 JTAG pins used as in the following Table:

Table 2: JTAG Interface.

QCA4020 PIN#	JTAG Signal
GPIO_50	JTAG3_BE_TCK
GPIO_51	JTAG3_BE_TDO
GPIO_52	JTAG3_BE_TMS
GPIO_53	JTAG3_BE_TDI

J2 on the QCA4020 is used to configure JTAG. Connecting J2 (PIN 1 and PIN2), force the following JTAG configuration:

Table 3: J2 Setting for JTAG Interface.

Boot_Configure_BE_0 GPIO_9_BE	Boot_Configure_BE_1 GPIO_25_BE	Boot_Configure_BE_2 GPIO_18_BE	JTAG Interface for M4
0	0	1	JTAG in GPIO[53:50]

5 QCA4020 Pin Out

The QCA4020 has abundant number of pins and GPIOs and functionalities which are exposed through P1 and P2 jumper headers. The following table summarizes all pins exposed through P1 and P2 jumper headers and their hardware functionalities.

Table 4: P1 and P2 PIN Mapping.

Header and PIN	GPIO #	SPI or I2C or QSPI	UART	PWMADC/ Sensor ADC	PTA
P2 – PIN 1	3.3V				
P2 – PIN 2	GPIO4_BE				
P2 – PIN 3	GPIO5_BE				BT_ACTIVE
P2 – PIN 4	GPIO6_BE				WLAN_ACTIVE

P2 – PIN 5	GPIO7_BE				BT_PRIORITY
P2 – PIN 6	GPIO14_BE		HS_UART0_DM_CTS		
P2 – PIN 7	GPIO15_BE		HS_UART0_DM_TXD		
P2 – PIN 8	GPIO16_BE	I2C1_Master_SCL	HS_UART0_DM_RFR		BT_ACTIVE
P2 – PIN 9	GPIO17_BE	I2C1_Master_SDA	HS_UART0_DM_RXD		WLAN_ACTIVE
P2 – PIN 10	GPIO24_BE				
P2 – PIN 11	GPIO26_BE				
P2 – PIN 12	GPIO27_BE				
P2 – PIN 13	GPIO28_BE				
P2 – PIN 14	GPIO30_BE				
P2 – PIN 15	GPIO31_BE				
P2 – PIN 16	GPIO32_BE				
P2 – PIN 17	GPIO33_BE				
P2 – PIN 18	GND				
P1 – PIN 10	A0 (SENSEADC_1_BE)				
P1 – PIN 9	A1 (SENSEADC_0_BE)				
P1 – PIN 8	GPIO_41_BE				

P1 – PIN 7	GPIO48_BE				
P1 – PIN 6	GPIO49_BE				
P1 – PIN 5	GPIO54_BE			SENSEADC2	
P1 – PIN 4	GPIO55_BE			SENSEADC3	
P1 – PIN 3	GPIO56_BE			SENSEADC4	
P1 – PIN 2	GPIO57_BE			SENSEADC5	
P1 – PIN 1	GPIO58_BE			SENSEADC6	

6 Software Tools to be Installed

Please install the following tools

– **Python 2.7.X** ([Download Python | Python.org](#))

– **Eclipse IDE for C/C++** ([Eclipse IDE for C/C++ Developers | Eclipse Packages](#))

This is a GUI-based integrated development environment

Supported Version: Oxygen version – Release 4.7.2

– **Java:**

Eclipse IDE has dependency on Java, JDK 8 or higher

– **OpenOCD** ([Download OpenOCD for Windows \(gnutoolchains.com\)](#))

version 0.10.0 [2017-06-09]

– **GNU Arm Embedded Toolchain** ([GNU ARM Toolchain](#))

version 6.x

– **Qualcomm SDK for QCA4020:** The SDK contains sample demo applications with source code to demonstrate different features and technologies that QCA4020 supports.

7 Setting Up the Software Development Environment

7.1 Python

After installing Python, add the path to python.

Example:

If python.exe is in the folder

C:\CRMApps\Apps\Python276-64

set path as follows:

```
%PATH%=%PATH%;C:\CRMApps\Apps\Python276-64
```

7.2 Java

After installing Java, add path to Java.

Example:

If Java.exe is in the folder

```
C:\ProgramData\Oracle\Java\javapath
```

set path as follows:

```
%PATH%=%PATH%; C:\Program Files\Java\jdk1.8.0_161\bin
```

7.3 OpenOCD

OpenOCD plugin is required to establish the connection between Eclipse IDE and onboard FTDI JTAG debugger. After installation, add the path to OpenOCD.

Example:

If openocd.exe is in the folder

```
C:\Program Files\OpenOCD-20170609\bin
```

set path as follows:

```
set %PATH%=%PATH%;C:\Program Files\OpenOCD-20170609\bin
```



7.4 GNU ARM Toolchain

Install the ARM toolchain by running the “.exe” file and make sure you select the option to “Add path to environment variables” during the final step.


7.5 Setup OpenOCD Plugin Usage with Eclipse

Do the following steps:

1- Go to **Help > Install new software** in Eclipse IDE and make sure the following plugin are installed and enabled by default.

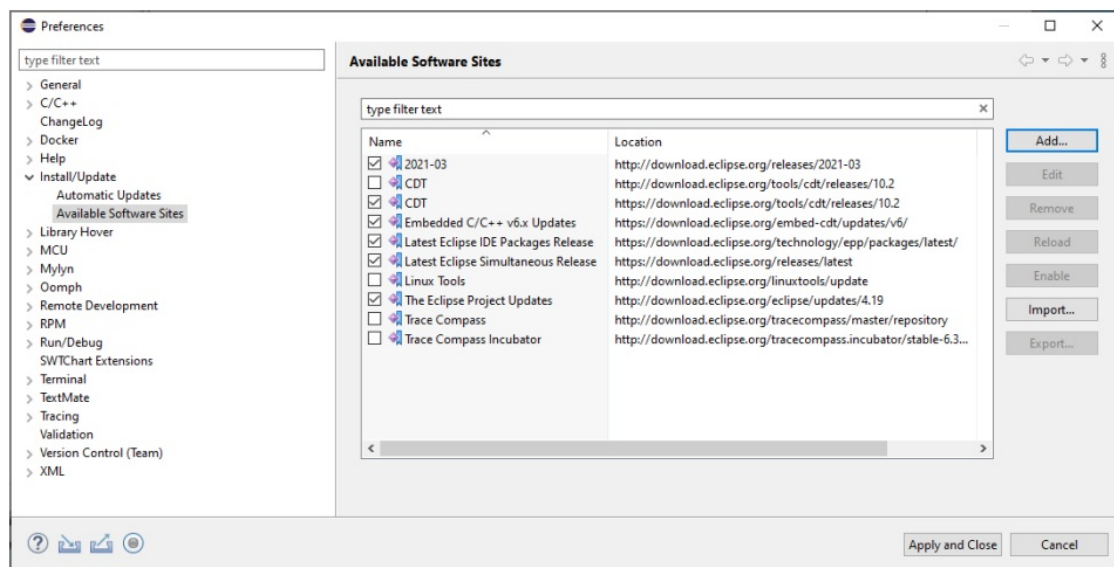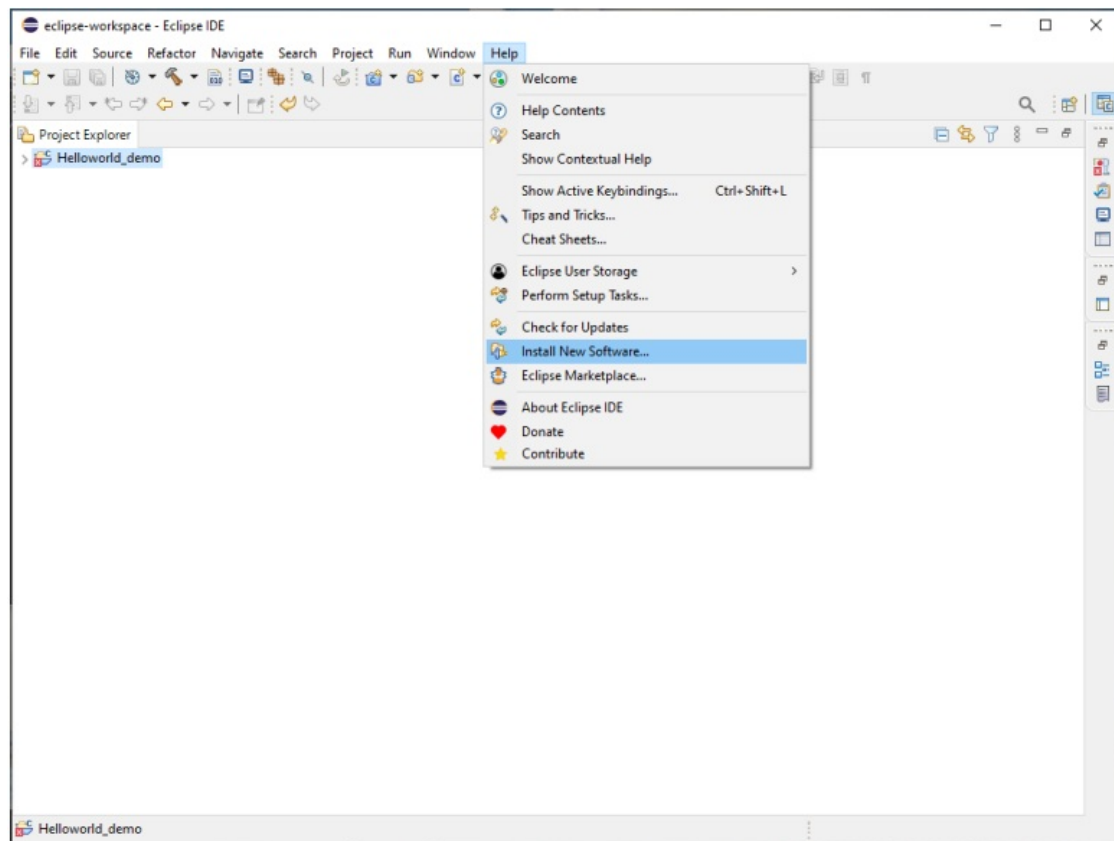

2- Set path to openOCD. Restart the Eclipse IDE and under **Window -> preferences**. Set path to openOCD as seen below:

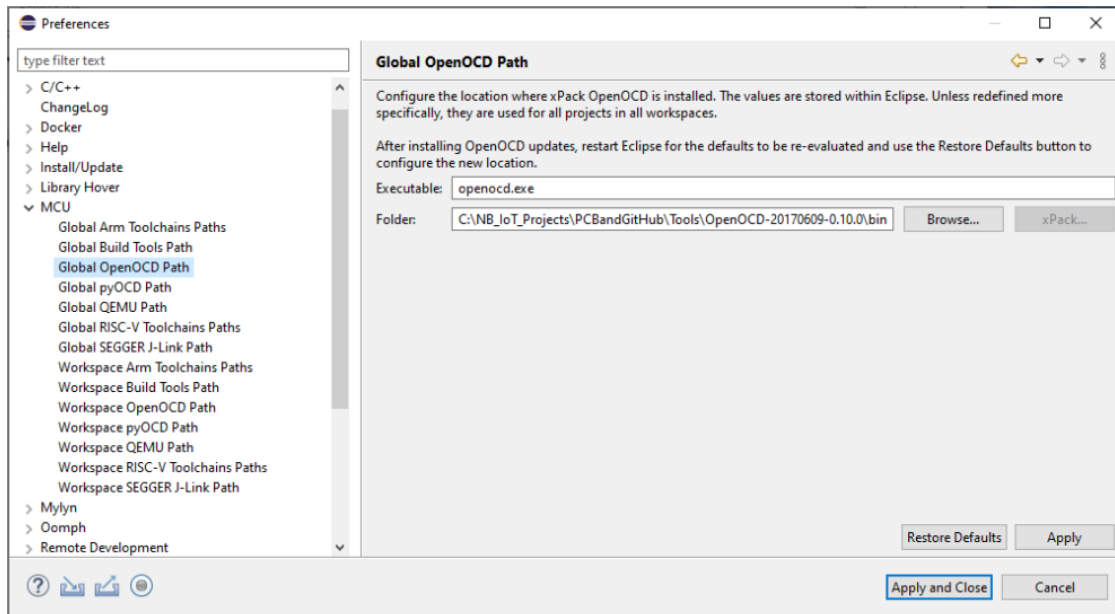

3- After installing the Qualcomm SDK, **QCA4020 OEM SDK+CDB**, Demos samples are in the following folder:


target\quart\demo\

4- Install the QCA plugin jar file available at

<SDK_source>/target/quartz/demo/EclipseSupportFiles

- Copy the jar file (QCA402x_plugin.jar) to the “dropin” folder under the Eclipse IDE installed folder.
- Restart the Eclipse IDE if running. To restart Eclipse, click on the **File->Restart** after the plug-in is installed.

5- Make sure all environment variable are set up correctly

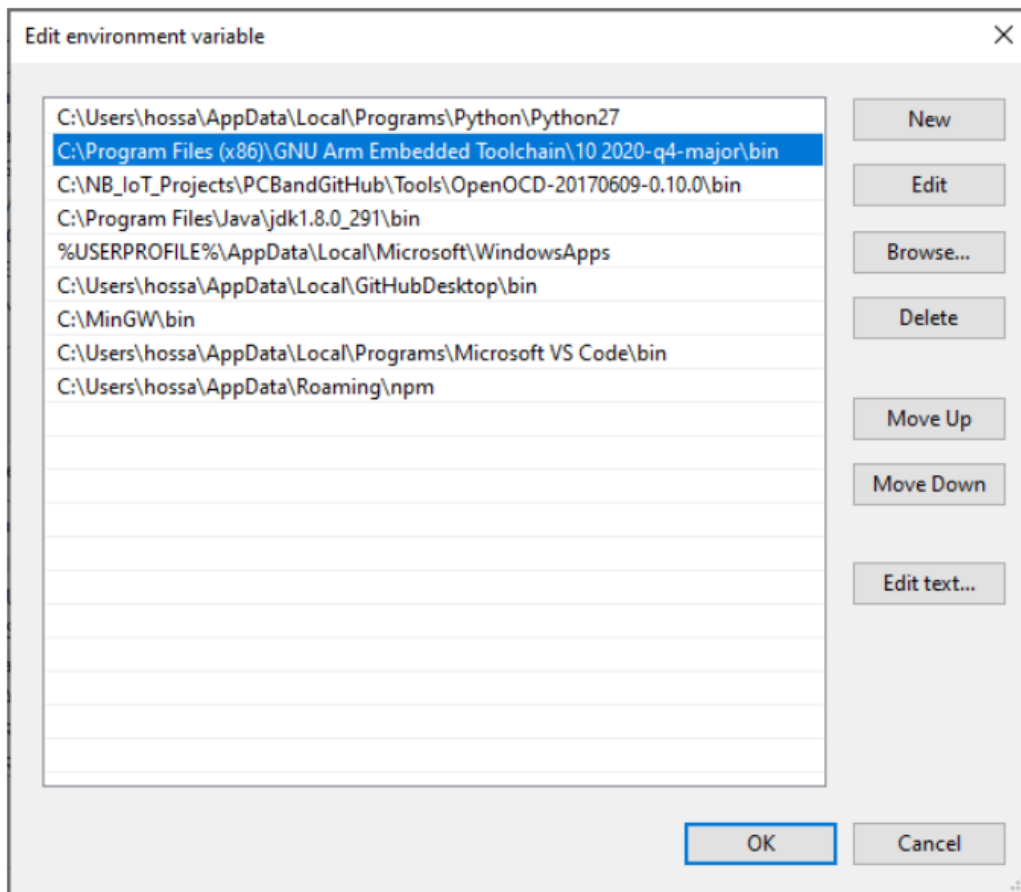

8 Importing “Hello World” Application

1- Install Eclipse project files for sample demo applications.

To install there is eclipseSupport.bat for Windows and eclipseSupport.sh for Linux in the following folder:

```
<SDK_source>/target
```

2- Open a terminal window and navigate to

```
<SDK_source>/target
```

3- Run the following command


```
sh eclipseSupport.sh
```

Or


```
eclipseSupport.bat
```

After executing the script, the Eclipse project files **.cproject**, **.project** and **.settings** folder are updated in the respective folders of the demo application.

4- Open Eclipse application and Go to **File->Open Project** and choose the folder of the “Hello World” application and check the box beside the application. Click **Finish**

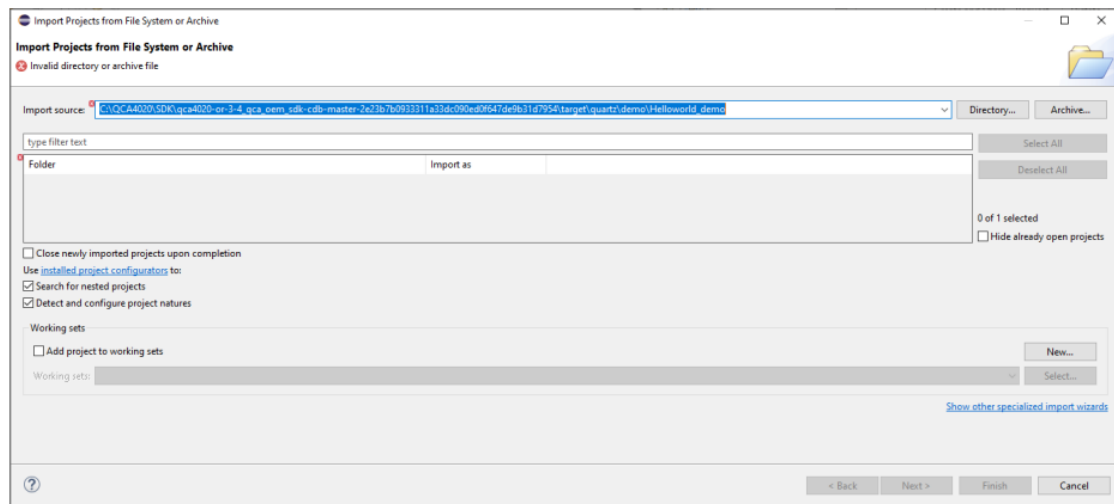


5- To debug the project, set the Debug Config. Go to **Run->Debug Configuration->GDB OpenOCD**. Set the Application and OpenOCD options as show in the images below. Select Quartz.elf as the C/C++ application. If you have already built the image, select Disable auto build. If image is not built, select Use workspace settings.

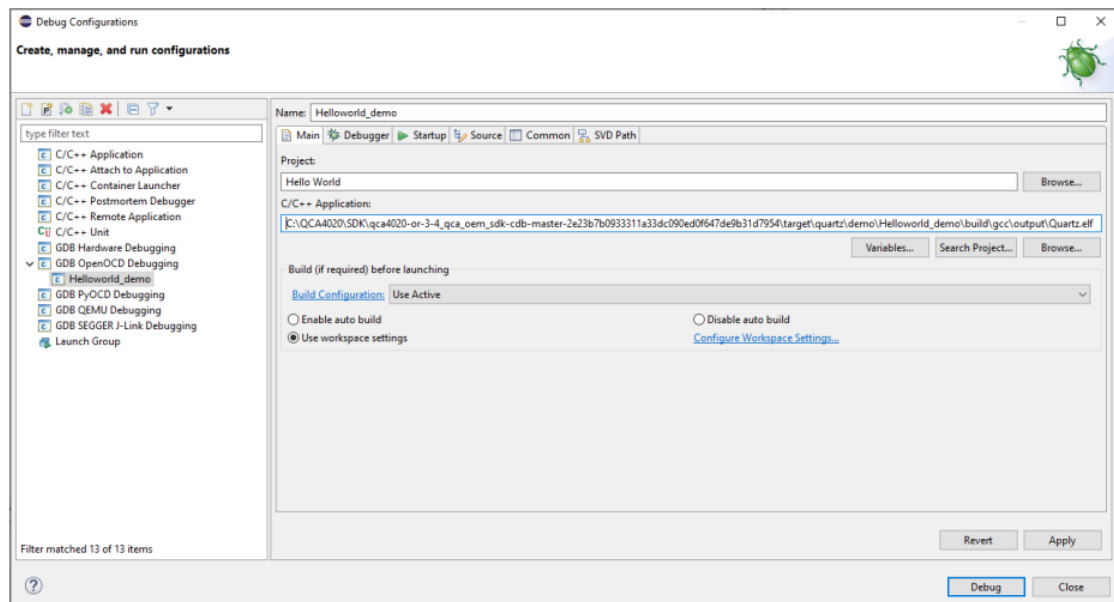

6- In the Debugger window, provide the openocd executable path with config option

```
-f ${project_loc}\build\gcc\qca402x_openocd.cfg
```


7- Provide the arm-none-eabi-dbg executable path for the GDB client as seen below.

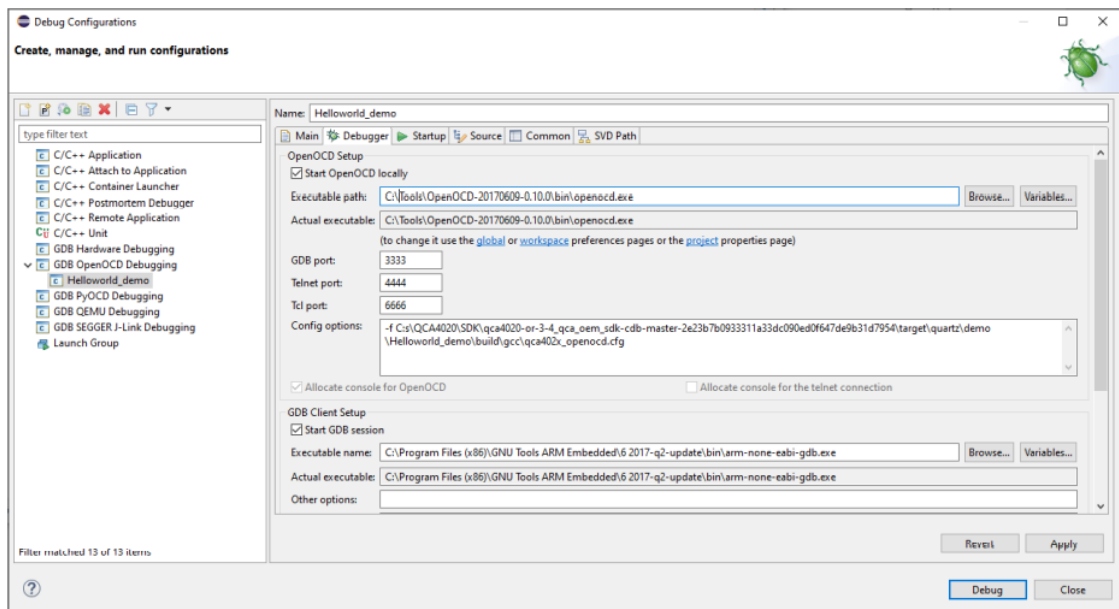


9 Building “Hello World” Application


To build the application, do the following:

1. Go to Project **properties->Configure build**. Right-click on the project name in project explorer and go to **Properties**
2. Verify the build command and the build directory in the Builder settings tab.
3. Go to C/C++ build and set the build command to “build.bat”, and the build directory to “path to source” as in the following screenshots.
4. Click **Apply and Close**

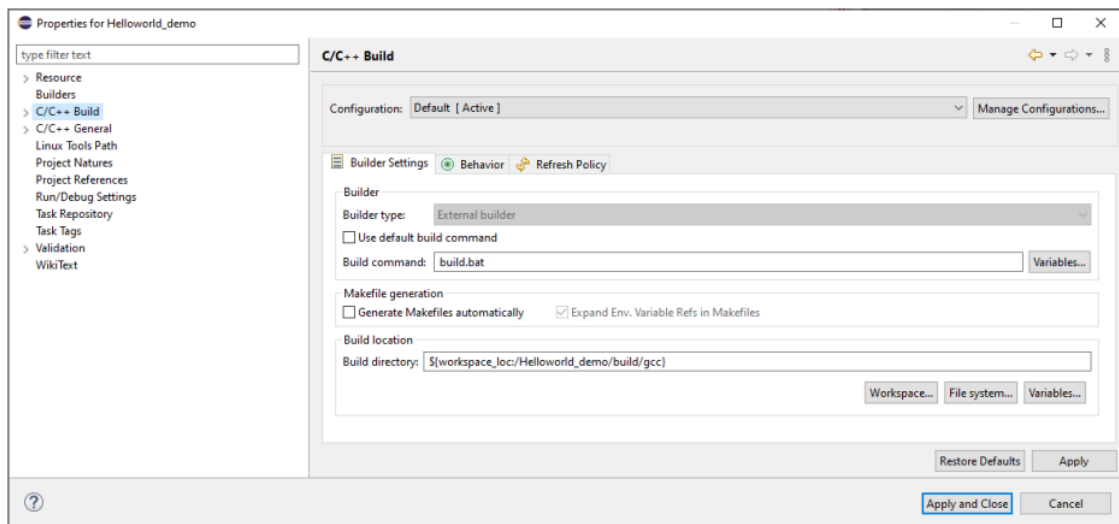


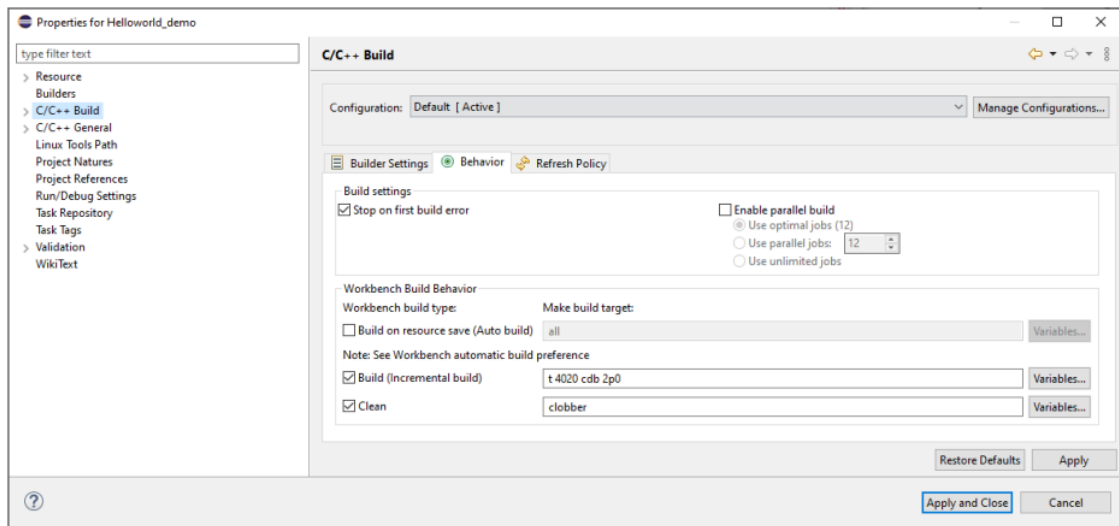

5. Build the application and you will see the following message in the Console Window

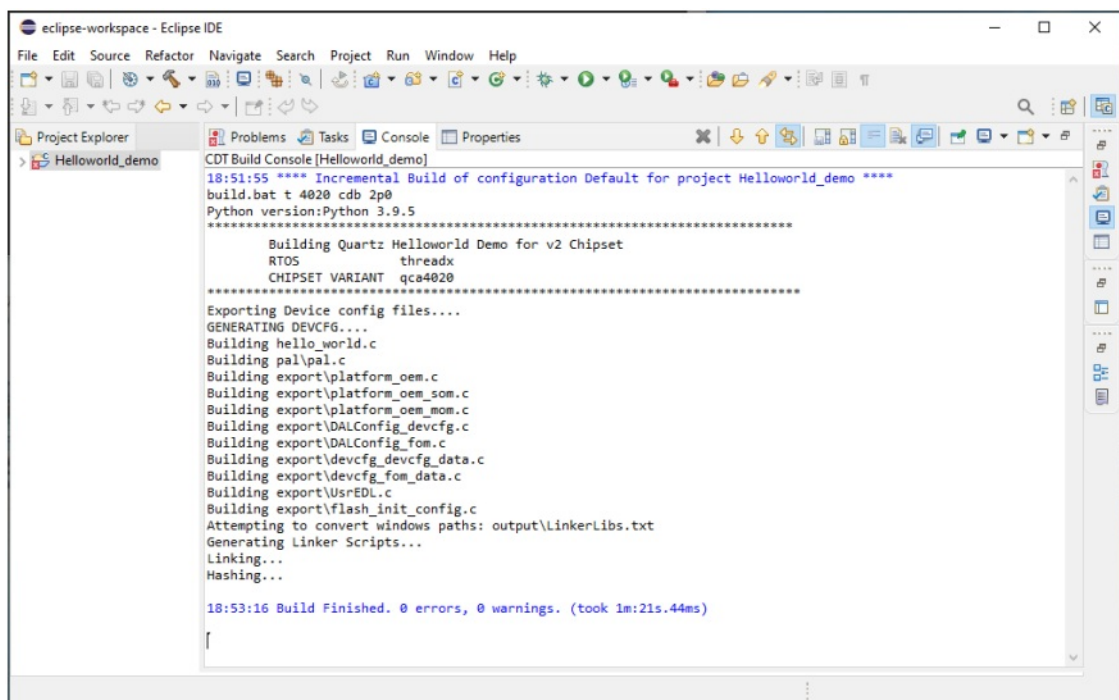

The output and *.elf files are generated and available under the **output** folder:

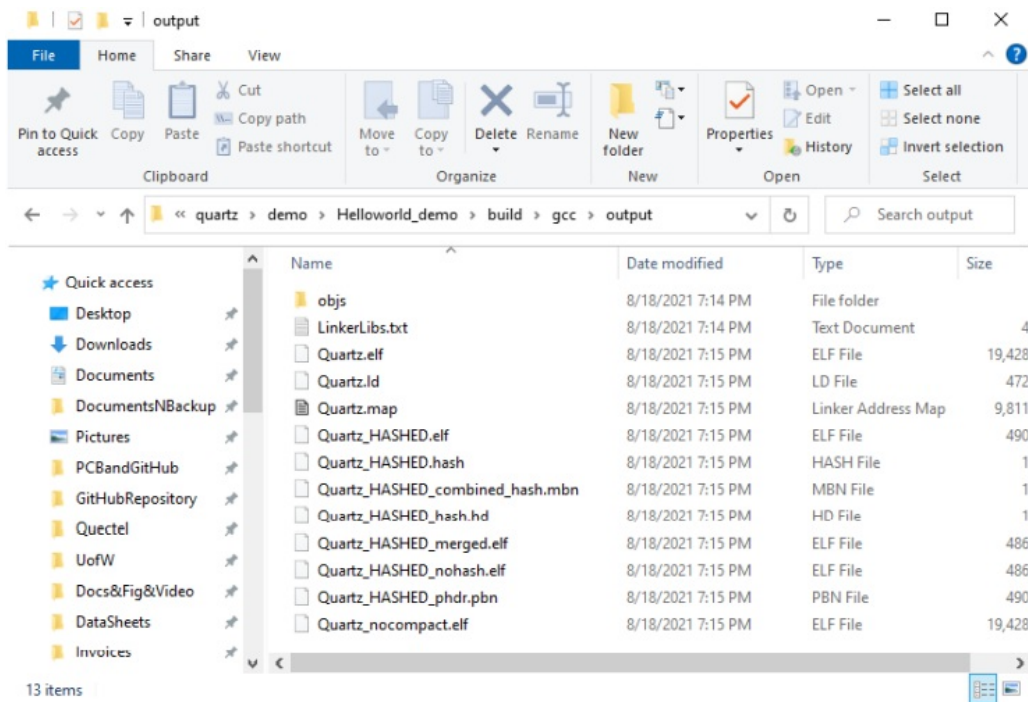


10 Flash the Application to the QCA4020 miniPCle using USB

You can flash an application to the QCA4020 miniPCle over the USB port. To do so, follow the following steps:

- 1- Connect a jumper on J3 to short-circuit it. This puts the QCA4020 in EDL (Emergency Download Mode) which allows to download an image to the QCA4020 flash.
- 2- Connect a Micro USB cable between USB port on the USB adaptor (HAT) and a USB port on a Windows PC.

Open the device manager and you shall see Qualcomm DLoader is enumerated on a serial port (i.e., COM40 in this case).

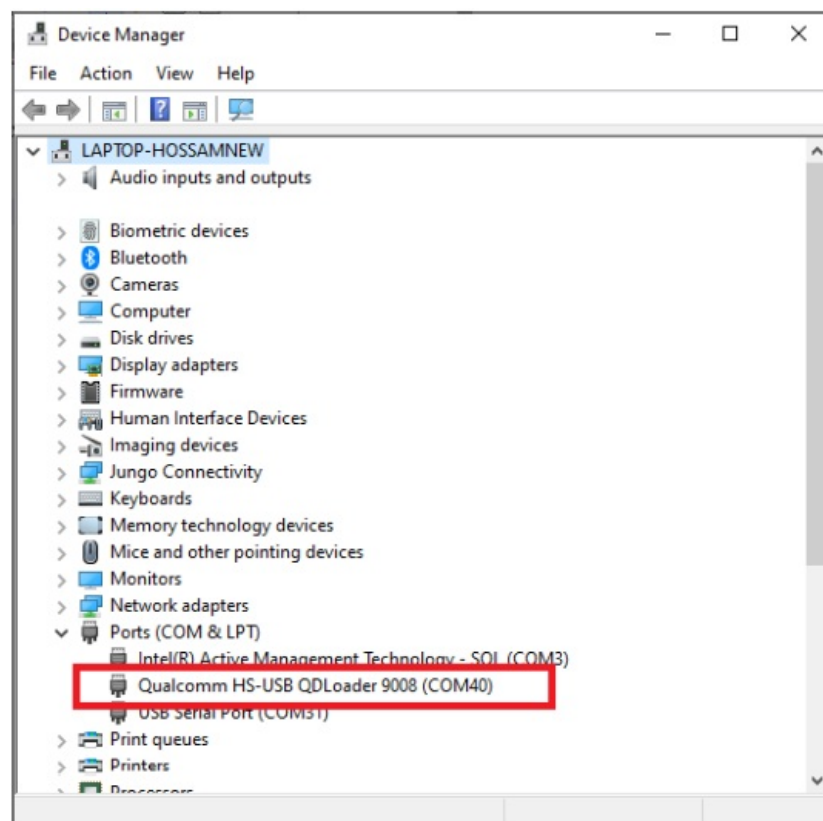


3- Use the python-based tool called **qflash.py** (which is included in the QCA4020 SDK). The tool allows flashing images over USB. The tool is available at the following folder:

```
target\build\tools\flash
```

If the tool is invoked without any optional parameters, it does the following:

- a) Generate a default firmware descriptor table.
- b) Generate a default partition table.
- c) Flash the default sample application *.elf files to the qca4020 flash.

When you run this tool with **-h** parameter, you get the following as in this screenshot:

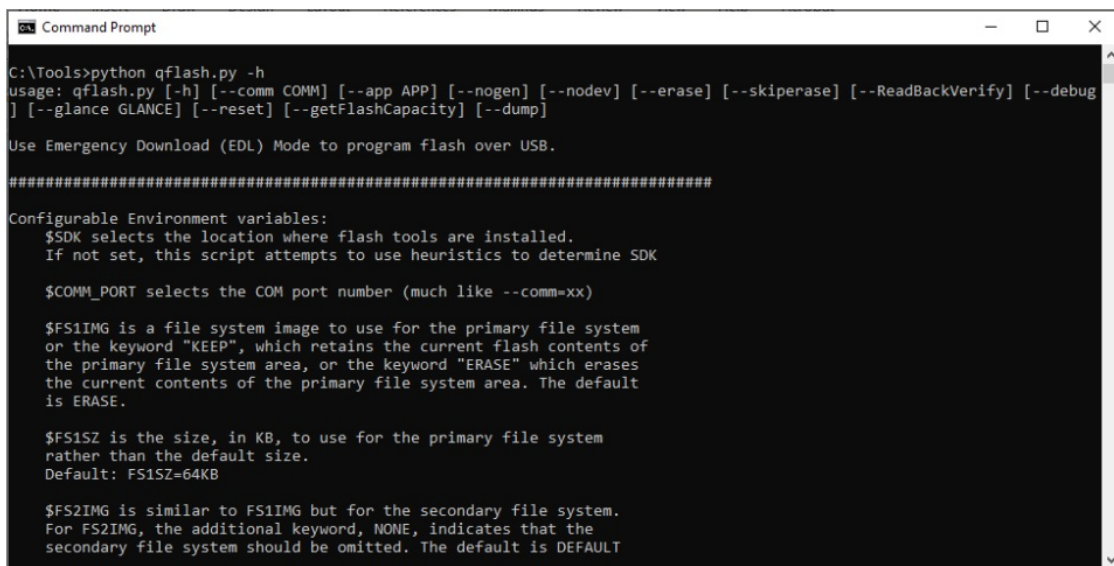

```
Command Prompt
C:\Tools>python qflash.py -h
usage: qflash.py [-h] [--comm COMM] [--app APP] [--nogen] [--nodev] [--erase] [--skiperase] [--ReadBackVerify] [--debug]
               [--glance GLANCE] [--reset] [--getFlashCapacity] [--dump]

Use Emergency Download (EDL) Mode to program flash over USB.

#####

Configurable Environment variables:
  $SDK selects the location where flash tools are installed.
  If not set, this script attempts to use heuristics to determine SDK

  $COMM_PORT selects the COM port number (much like --comm=xx)

  $FS1IMG is a file system image to use for the primary file system
  or the keyword "KEEP", which retains the current flash contents of
  the primary file system area, or the keyword "ERASE" which erases
  the current contents of the primary file system area. The default
  is ERASE.

  $FS1SZ is the size, in KB, to use for the primary file system
  rather than the default size.
  Default: FS1SZ=64KB

  $FS2IMG is similar to FS1IMG but for the secondary file system.
  For FS2IMG, the additional keyword, NONE, indicates that the
  secondary file system should be omitted. The default is DEFAULT
```

4- Run the following command to flash the application to the QCA4020

```
python qflash.py --comm_port 40 --app C:\QCA4020\SDK\qca4020-or-3-4_qca_oem_sdk-cdb-master-2e23b7b0933311a33dc090ed0f647de9b31d7954\target\quartz\demo\Helloworld_demo\build\gcc\output\Quartz_HASHED.elf
```

Note the image to be flashed is the **Quartz_HASHED.elf**.

You shall see the output as in the below screenshot which indicates the image is successfully flashed to QCA4020.

```
Command Prompt
C:\NB_IoT_Projects\PCBandGitHub\DataSheets\QCA4020\SDK\qca4020-or-3-4_qca_oem_sdk-cdb-master-2e23b7b0933311a33dc090ed0f647de9b31d7954\target\build\tools\flash>python qflash.py --comm_port 40 --app C:\NB_IoT_Projects\PCBandGitHub\DataSheets\QCA4020\SDK\qca4020-or-3-4_qca_oem_sdk-cdb-master-2e23b7b0933311a33dc090ed0f647de9b31d7954\target\quartz\demo\HelloWorld_demo\build\gcc\output\Quartz_HASHED.elf
qflash.py Info: Generate partition table...
qflash.py Info: Generate FWD table...
[2021-08-18 19:34:41,480] INFO: Checking for files to add to the image for Firmware Descriptor Table 0 File:gen_fwd_table.py:662 Function:gen_xml_program
[2021-08-18 19:34:41,483] INFO: Done Generating XML file to program. File:gen_fwd_table.py:700 Function:gen_xml_program
qflash.py Info: Download device programmer...
qflash.py Info: Device Programmer loaded successfully
qflash.py Info: Skipping erase all flash
qflash.py Info: Program flash. Please wait...
qflash.py Info: Flash programming complete!

C:\NB_IoT_Projects\PCBandGitHub\DataSheets\QCA4020\SDK\qca4020-or-3-4_qca_oem_sdk-cdb-master-2e23b7b0933311a33dc090ed0f647de9b31d7954\target\build\tools\flash>
```

11 Flash the Application to the QCA4020 miniPCle using JTAG

You can use JTAG interface on the QCA4020 miniPCle to flash the image. A SEGGER J-link hardware is used with connect and interface to the JTAG.


On the QCA4020 miniPCle, do the following

- Connect J1 (PIN1 and PIN2). This force JTAG mode
- Connect J3 (PIN1 and PIN2). This enable JTAG interface

On Windows environment variables, add the following environment variable:

- **JLINK_PATH** set it to J-link GDB server executable file (e.g., **C:\Program Files (x86)\SEGGER\JLink**)
- **CLIENT_PATH** set it to ARM GNU tools (e.g., **C:\Program Files (x86)\GNU Arm Embedded Toolchain\10.2020-q4-major\bin**)

Using Eclipse IDE, go to **Run->External Tools->External Tools Configurations** and add a new configuration. Point to the **flash.bat** file in the SDK which is used to configure and launch GDB server. Click **Apply** and then **Run**.

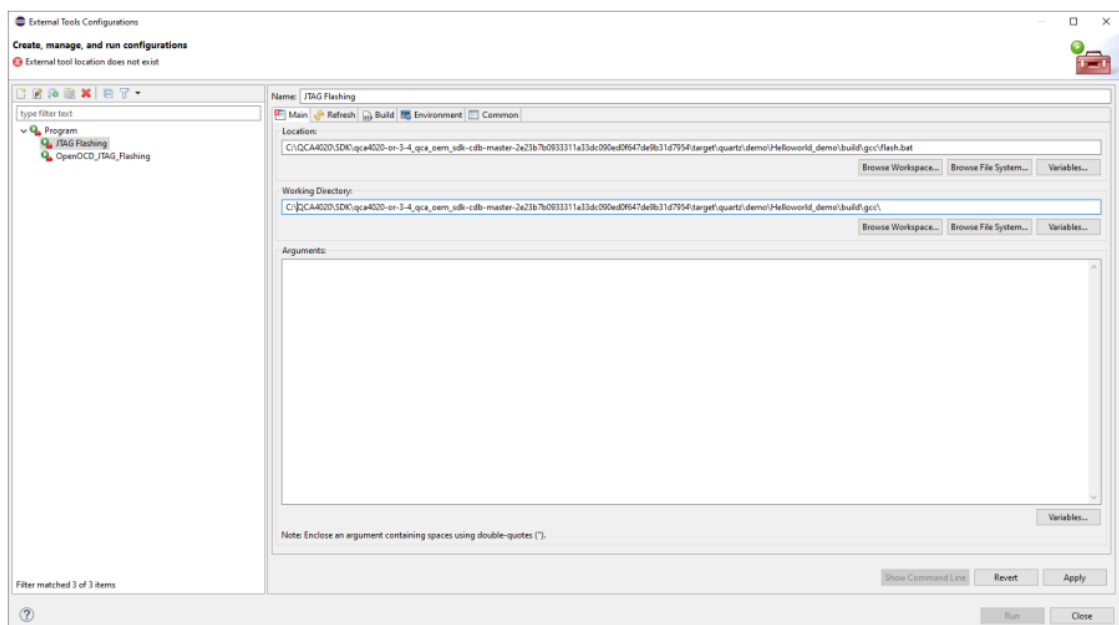

[illegible]

The screenshot shows a Windows desktop with a Visual Studio Code editor and a Windows Command Prompt window.

Visual Studio Code Editor:

- File Explorer:** Shows the project file structure: `Project Explorer` > `helloworld.c`.
- Editor:** Displays the following C code:



```
01 #include <stdio.h>
02
03 int main()
04 {
05     printf("Hello World!\n");
06     sleep(1000); //sleep for 1 sec
07 }
08
09 //EOF
10
```
- Output Console:** Shows the execution output:


```
Microsoft Windows [Version 10.0.17134.0]
(c) 2016 Microsoft Corporation. All rights reserved.
C:\Program Files (x86)\GSGER\Ginkgo\GDBServer\GDB>
Reading register # address 0x10040020
Reading all registers
Read 4 bytes @ address 0x10040020 (Data = 0x00014094)
Reading all registers
Read 4 bytes @ address 0x10040020 (Data = 0x00014094)
Reading all registers
Read 4 bytes @ address 0x10040020 (Data = 0x00014094)
Downloading 4 bytes @ address 0x100000D04
Reading all registers
Read 4 bytes @ address 0x10040020 (Data = 0x00014094)
Downloading 4 bytes @ address 0x100000000
Reading all registers
Read 4 bytes @ address 0x10040020 (Data = 0x00014094)
Reading 64 bytes @ address 0x100400140
Read 2 bytes @ address 0x100400146 (Data = 0x4092D)
Setting breakpoint @ address 0x100400146, Size = 2, BPHandle = 0x0000
Starting target CPU...
Breakpoint reached @ address 0x100400146
Reading all registers
Reading breakpoint @ address 0x100400146, Size = 2
Read 4 bytes @ address 0x100400146 (Data = 0x41F0E2D)
Downloading 1 bytes @ address 0x100000160
Reading all registers
Read 4 bytes @ address 0x100400146 (Data = 0x41F0E2D)
Downloading 4 bytes @ address 0x1000001F8
Reading all registers
Read 4 bytes @ address 0x100400146
Breakpoint 1 at 0x100400146: File 'local\mnt\workspace\Ginkgo\lib\lib\DT-Q-3.4-1-00001-Q2M-2-20120201_023452\h\iosw_core\storage\tools\tagprogrammer\src\tagprogrammer.c', line 123.
Breakpoint 1, main () at /local/mnt/workspace/CWBulls/DT-Q-3.4-1-00001-Q2M-2-20120201_023452\h\iosw_core\storage\tools\tagprogrammer\src\tagprogrammer.c:123
123 | WRITE (...) {
    | ^~~~~
    | _write: done\nline:14, done\nif get output\Bart_000001.alif, offset=0308, start_sector=03 num_records=1\nwriting library file ...\\user\Newell\iosw1_dew\lib\lib\DT-Q-3.4-1-00001-Q2M-2-20120201_023452\h\iosw_core\storage\tools\tagprogrammer\src\tagprogrammer.c
Breakpoint 1, main () at /local/mnt/workspace/CWBulls/DT-Q-3.4-1-00001-Q2M-2-20120201_023452\h\iosw_core\storage\tools\tagprogrammer\src\tagprogrammer.c:123
123 | }
    | ^
    | _write: the recordable has been specified and target does not support
    | determining recordable automatically. Try using the 'File' command.
    | C:\Bulls\lib\lib\DT-Q-3.4-1-00001-Q2M-2-20120201_023452\h\iosw_core\storage\tools\tagprogrammer\src\tagprogrammer.c
Loading section RAW_PDI_APPS_R0_REGION, size 0x150 len 0x10000000
Loading section RAW_PDI_APPS_R0_REGION, size 0x150 len 0x10000000
Start address 0x10000000, load size 2356
Transfer rate: 02 KB/sec, 0.018 bytes/cycle.
Breakpoint 1 at 0x10000000: File 'local\mnt\workspace\CWBulls/DT-Q-3.4-1-00001-Q2M-2-20120201_023452\h\iosw_core\storage\tools\tagprogrammer\src\tagprogrammer.c', line 123.
```

Windows Command Prompt:

- Title Bar:** C:\Program Files (x86)\GSGER\Ginkgo\GDBServer\GDB
- Content:** Displays the same execution output as the Visual Studio Code Output Console.

```
Flash Operation Completed Successfully...
Stopping GDB server....
SUCCESS: The process with PID 23756 has been terminated.
```

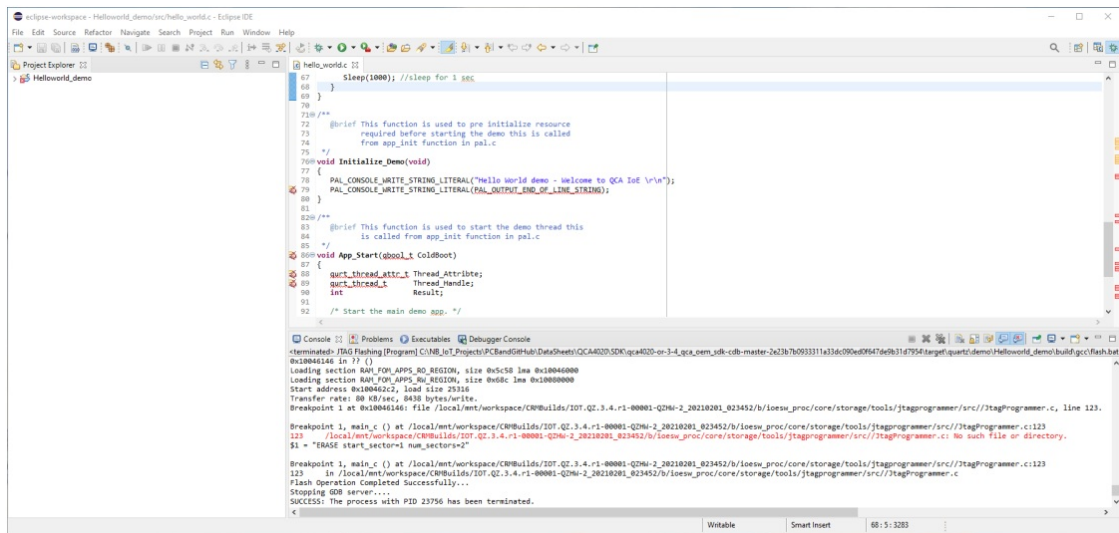

After finishing flashing the image, make sure to remove J1 & J3 on QCA4020 miniPCIe to exit JTAG mode.

12 Connecting QCA4020 to Serial Terminal Through UART

You can use the QCA4020 miniPCIe when mounted on USB adaptor (HAT) with any device that has UART (Tx/Rx) interface such as a Raspberry PI board, Arduino board or any other hardware board, with UART interface.

You can also use and connect the QCA4020 miniPCIe/USB adaptor (HAT) to a USB port in the computer through a USB-to-UART cable. You can use cable such as this one:


[USB TO UART TTL \(Wires\) Serial Cable \(PL2303HX\) MCP00102W Programmer Arduino Compatible in Elecrow bazaar!](#)

Such a cable has four wires colored as follow:


Red: +5V
 White: Tx
 Green: Rx
 Black: GND

Connect the **White** cable to **UART_TX** and **Green** cable to **UART_RX**. Also connect the **Black** cable to the **GND**.

As in the picture below, connect **UART_TX** to **SJ2 (PIN2)** AND **UART_RX** to **SJ1 (PIN2)**.

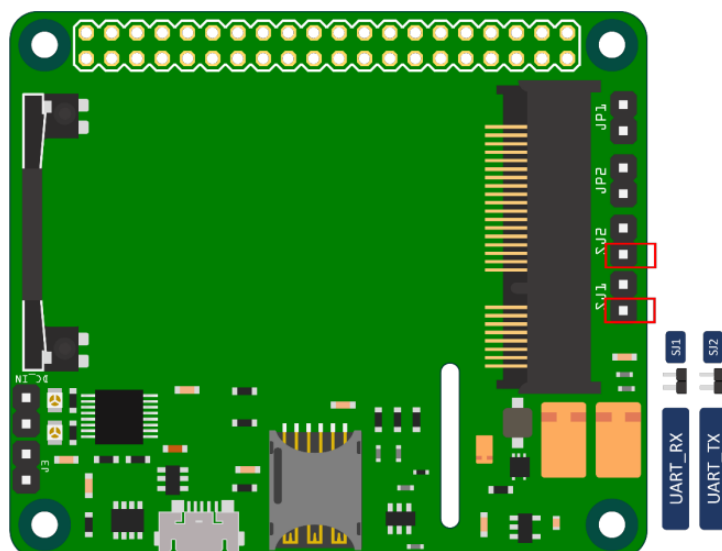

Make sure when you connect the USB-to-UART cable, it shows correctly in Windows device manager and all its driver is installed as in this screenshot.

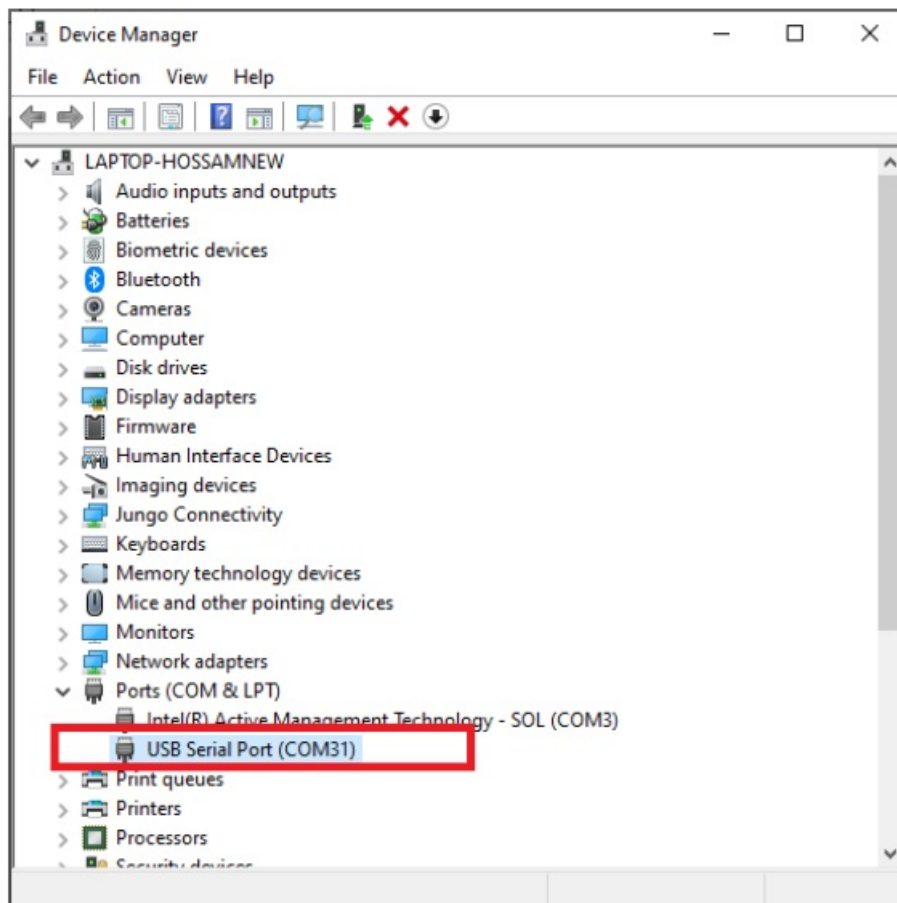


13 Using Serial Terminal


It is recommended to use Tera Term tool as the serial terminal. You can download it from here:

<https://osdn.net/projects/ttssh2/downloads/54081/teraterm-4.72.exe/>


Launch Tera Terminal and select the **Serial** option and select USB-to-Serial port.

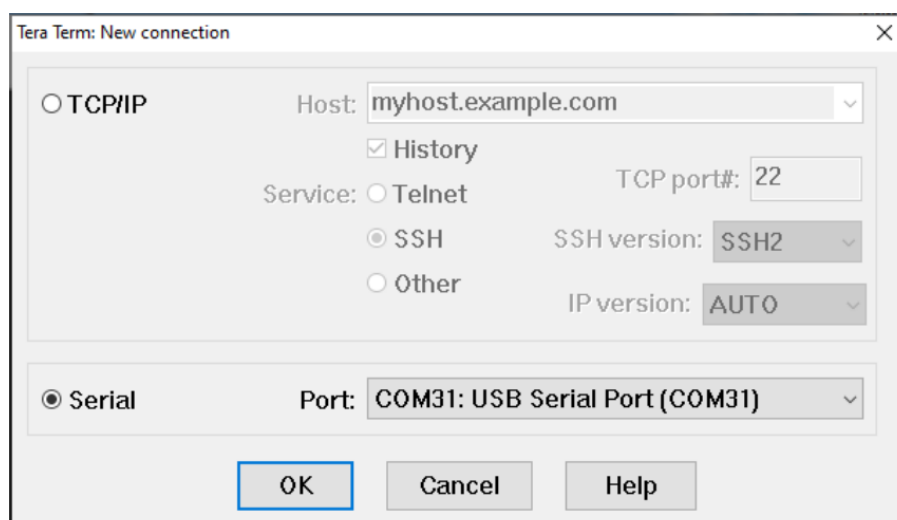


In Tera Term, choose **Setup->Serial port** and configure serial ports according to the following:

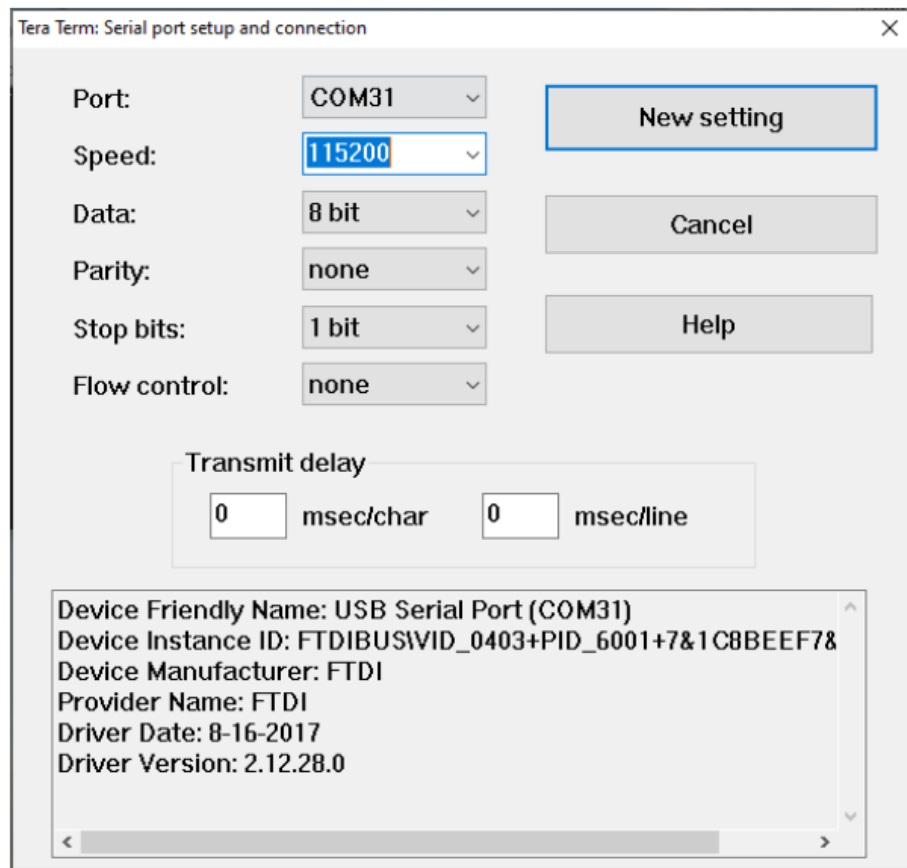

And now you are ready to see the output from “hello World” application on the serial monitor.

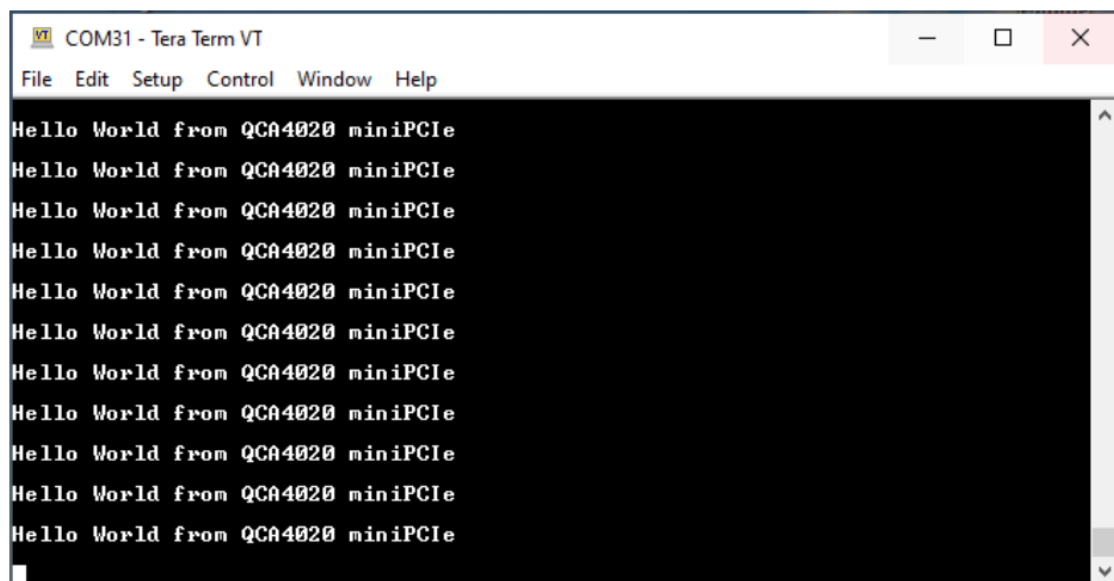

If you are using JTAG mode to flash the image to the QCA4020 miniPCle, you shall see the following output on Tera terminal

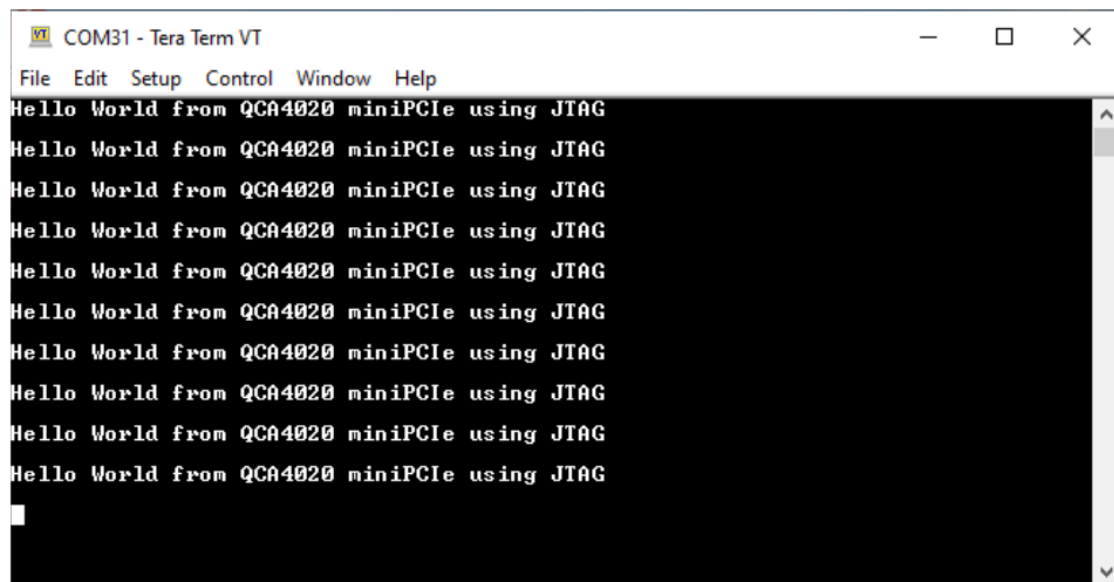


```
COM31 - Tera Term VT
File Edit Setup Control Window Help
Hello World from QCA4020 miniPCIe using JTAG
Hello World from QCA4020 miniPCIe using JTAG
Hello World from QCA4020 miniPCIe using JTAG
Hello World from QCA4020 miniPCIe using JTAG
Hello World from QCA4020 miniPCIe using JTAG
Hello World from QCA4020 miniPCIe using JTAG
Hello World from QCA4020 miniPCIe using JTAG
Hello World from QCA4020 miniPCIe using JTAG
Hello World from QCA4020 miniPCIe using JTAG
Hello World from QCA4020 miniPCIe using JTAG
```

14 QCLI Demo Application

CLI demo application is a comprehensive demo that provides a mechanism to demonstrate different and all features and technologies that QCA4020 miniPCIe supports. It also provides reference implementation and usage of customer facing QAPIs.

The QCLI-demo application is available with the QCA4020 SDK and you can follow the same steps described before in Eclipse to build and flash it to the QCA4020 miniPCIe. Once flashed, you can see the output on the serial terminal as in the screenshot below. Also, you can exercise connecting to your home/office WLAN

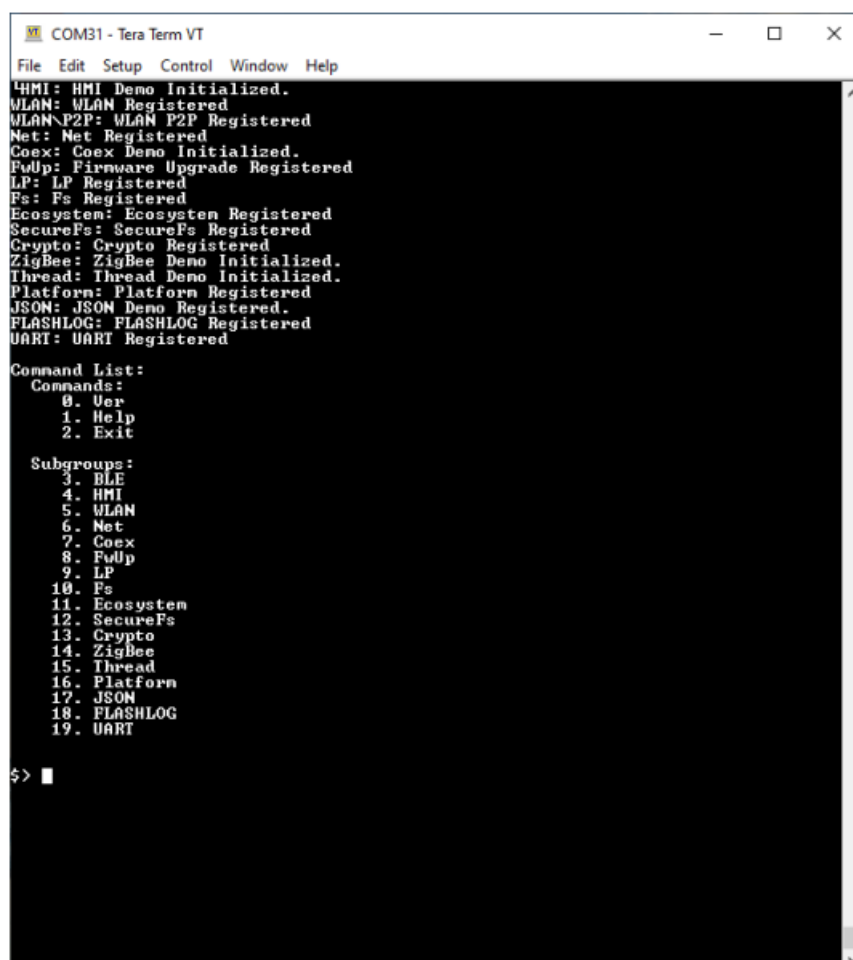

```
COM31 - Tera Term VT
File Edit Setup Control Window Help
HMI: HMI Demo Initialized.
WLAN: WLAN Registered
WLAN-P2P: WLAN P2P Registered
Net: Net Registered
Coex: Coex Demo Initialized.
FuUp: Firmware Upgrade Registered
LP: LP Registered
Fs: Fs Registered
Ecosystem: Ecosystem Registered
SecureFs: SecureFs Registered
Crypto: Crypto Registered
ZigBee: ZigBee Demo Initialized.
Thread: Thread Demo Initialized.
Platform: Platform Registered
JSON: JSON Demo Registered.
FLASHLOG: FLASHLOG Registered
UART: UART Registered

Command List:
Commands:
0. Ver
1. Help
2. Exit

Subgroups:
3. BLE
4. HMI
5. WLAN
6. Net
7. Coex
8. FuUp
9. LP
10. Fs
11. Ecosystem
12. SecureFs
13. Crypto
14. ZigBee
15. Thread
16. Platform
17. JSON
18. FLASHLOG
19. UART


$>
```

The following screenshot shows how to connect to an WLAN access point.





```
COM31 - Tera Term VT
File Edit Setup Control Window Help
VLAN$> Enable
VLAN$> scan
VLAN: Scan result count:0
VLAN$> scan
VLAN: ssid = TPLink
VLAN: bssid = h0:be:76:cb:d6:5b
VLAN: channel = 9
VLAN: indicator = 10
VLAN: security =
RSN/WPA2= <PSK> <TKIP AES>
VLAN: shell> Scan result count:1
VLAN$> SetDevice 1
VLAN$> SetWpaPassphrase Yusuf050209
VLAN$> SetWpaParameters WPA2 CCMP CCMP
VLAN$> Connect TPLink
VLAN:
VLAN: Setting SSID to TPLink
VLAN:
VLAN$>
VLAN: devid 1 Disconnected MAC addr 00:00:00:00:00:00
VLAN$> Connect TPLink
VLAN:
VLAN: Setting SSID to TPLink
VLAN:
VLAN$>
VLAN: devid 1 Disconnected MAC addr 00:00:00:00:00:00
VLAN: devid - 1 1 CONNECTED MAC addr h0:be:76:cb:d6:5b
VLAN: 4 way handshake success for device=1
VLAN$>
```

QCA4020 miniPCle [Copyright © 5GHUB.US](http://5GHUB.US)

Documents / Resources

 MULTI-MODE WIFI, BLUETOOTH, ZIGBEE <small>5G HUB HUB-4020 Multi-Mode Dual Band WiFi Bluetooth Zigbee, Dual Band WiFi Bluetooth Zigbee, Wi-Fi Bluetooth Zigbee, QCA4020, Bluetooth Zigbee</small>	5G-HUB QCA4020 Multi-Mode Dual Band WiFi Bluetooth Zigbee [pdf] Instructions QCA4020, Multi-Mode Dual Band WiFi Bluetooth Zigbee, Dual Band WiFi Bluetooth Zigbee, Wi-Fi Bluetooth Zigbee, QCA4020, Bluetooth Zigbee
--	---

References

-  [5G HUB TECHNOLOGIES, INC – 5G HUB Technology](#)
-  [Prebuilt GNU Toolchains for Windows](#)
-  [Welcome to Python.org](#)
-  [Downloading File /54081/teraterm-4.72.exe - Tera Term - OSDN](#)