

LEA PROFESSIONAL LEA Connect 4.0.3.6 Firmware Update Readme Instructions

Home » LEA PROFESSIONAL » LEA PROFESSIONAL LEA Connect 4.0.3.6 Firmware Update Readme Instructions [™]

LEA PROFESSIONAL LEA Connect 4.0.3.6 Firmware Update Readme



NOTE – This firmware file is for 80, 160, 350, and 700 watt 2. Click 'Update Amps' models (not including –ADSP models).

Contents

- **1 Firmware Update Instructions**
- 2 Features And Improvements In
- 4.0.3.6:
- 3 Documents / Resources
 - 3.1 References
- **4 Related Posts**


Firmware Update Instructions

- The firmware updater is located in the WebUI in the top right corner. Click the Hamburger Menu, Choose File, and then Update Firmware.
- Click 'Choose Firmware File' unzip the firmware update file and select .tar.xz file (ASBT-4-0-3-6-V2.tar.xz.enc) then click "update amps"
- NOTE: All amplifiers on the same network will be updated.
- The shark fin will turn magenta during the update process, please do not turn off or power cycle the amplifier until the firmware update is complete.
- Once the shark fin is blue and the LCD screen is illuminated, the firmware update process is complete.
- While not required, it is recommended to power cycle the amp with the power cord after the firmware update is complete.
- 350W and 700W models will take ~5 minutes to update firmware
- 80W and 160W models may take up to 15 minutes to update firmware


To Confirm the update was successful, click on the and then Amp Settings. Scroll down to Device Information and you should have the following Firmware versions:

350W and 700W Models:	80W and 160W Models:
Firmware Version: 4.0.3.6	Firmware Version: 4.0.3.6
Power Supply Version: 4.0.3.0	Power Supply Version: 4.0.3.1
Amp1234 Version: 4.0.3.0	Amp1-8 Version: 4.0.3.2


Click the Hamburger Menu

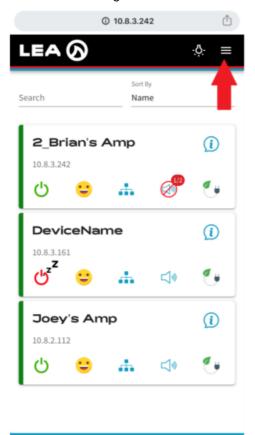

Click 'Firmware Update'

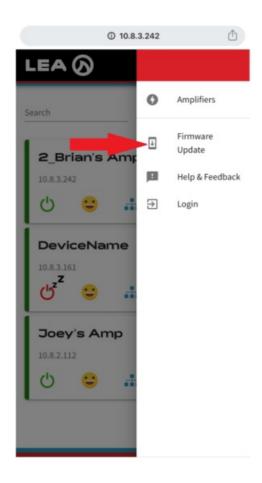

- 1. Choose file: ASBT-4-0-3-6-V2.tar.xz.enc
- 2. Click 'Update Amps'

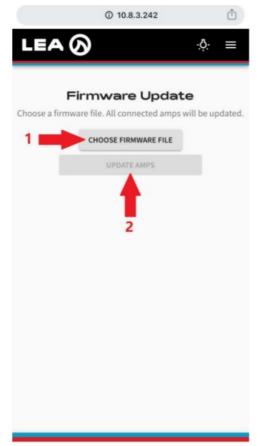

Features And Improvements In 4.0.3.6:

WebUI and General Updates

- · Added Input Mixer Functionality
- · Added Chinese and Spanish Language Support
- · Added CS Touch configuration via WebUI

Sharkware Specific Updates

• Added User Access Control of the WebUI to lock out specific parameters

Amplifier Updates

Resolves an issue with 80/160 that may report AC current draw incorrectly



Documents / Resources



LEA PROFESSIONAL LEA Connect 4.0.3.6 Firmware Update Readme [pdf] Instructions 80, 160, 350, 700, LEA Connect 4.0.3.6 Firmware Update Readme, Connect 4.0.3.6 Firmware Update Readme, Firmware Update Readme, Update Readme, Readme

References

User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.