



KT Commander 4 Way and 8 Way Smart Touch Switch Panels Instruction Manual

[Home](#) » [KT](#) » KT Commander 4 Way and 8 Way Smart Touch Switch Panels Instruction Manual 



**INTRODUCING THE COMMANDER
4 WAY & 8 WAY SMART TOUCH
SWITCH PANELS
Instruction Manual**



Contents

- [1 Commander 4 Way and 8 Way Smart Touch Switch Panels](#)
- [2 IDEAL FOR A WIDE RANGE OF APPLICATIONS](#)
- [3 KEY FEATURES](#)
- [4 KIT INCLUDES](#)
- [5 SPECIFICATIONS](#)
- [6 DIAGRAMS](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

Commander 4 Way and 8 Way Smart Touch Switch Panels

Product Model No.	Product Name.
KT70952	4 Way Commander Smart Touch Switch Panel
KT70954	8 Way Commander Smart Touch Switch Panel

Ideal for Automotive, 4WD & Marine applications, The KT Commander Switch Panel is the perfect innovative solution to controlling power of 12V devices in your Vehicle, 4WD, Caravan, Motorhome or Boat.



Available in both a 4 Way & 8 Way switch configuration with each unit rated to 20A maximum, the switch panel is simple to install with wiring terminals at the rear and a simple power on / off touch switch on the display allows all circuits to be on / off with ease.

IDEAL FOR A WIDE RANGE OF APPLICATIONS



CARAVAN



RV



4WD



BOAT

KEY FEATURES

- 8 Circuits Rated to 20A Max (Total)
- Master On/Off Power Icon on Display

- Voltage Display visible whilst unit is 'On'
- Easy DIY Installation
- Switches illuminate 'Blue' for active circuit, 'Amber' for inactive circuit
- Includes 96 Programmable Icons
- Suitable For Use With 12V Devices
- Suitable For Automotive & Marine Applications



KIT INCLUDES


- 1 x 4 Way / 8 Way Commander Smart Touch Switch Panel
- 4 x Mounting Screws
- 96 Flexible Icons
- 1 x User Manual

SPECIFICATIONS


Technical Parameters	4 Way	8 Way
Rated Working Voltage:	12V	12V
Standby Current Consumption:	70mA	230mA
Min. Operating Voltage:	8.5A	8.5A
Max Operating Voltage:	18V	18V
Single Switch Rated Output Current:	20A	20A
Single Switch Rated Max Loading Current:	22A	22A
Single Switch Rated Output Power:	240W	240W
Single Switch Rated Loading Power:	265W	265W
Switch Responding Time:	<60ms	<60ms
Ambient Temperature Range:	-20°C to -60°C	-20°C to -60°C
Relative Humidity:	10-90%	10-90%
Switch Panel Max Amp:	20A	20A

DIAGRAMS


4 WAY

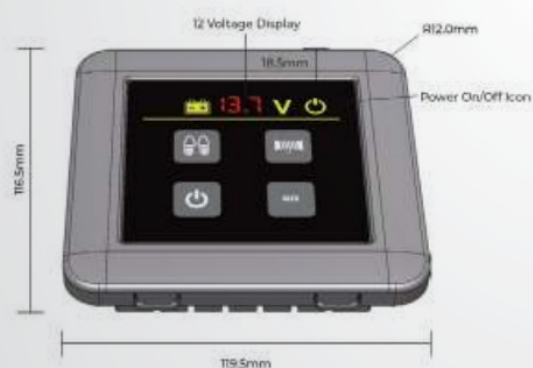


TOUCH PANEL
DEPTH = 47mm
SCREEN PANEL
DEPTH = 10mm

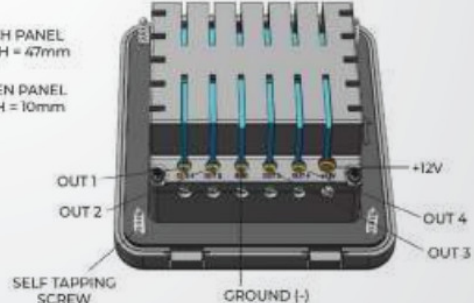

8 WAY

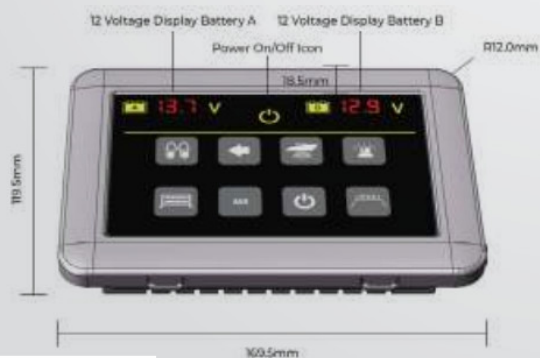

TOUCH PANEL
DEPTH = 47mm
SCREEN PANEL
DEPTH = 10mm

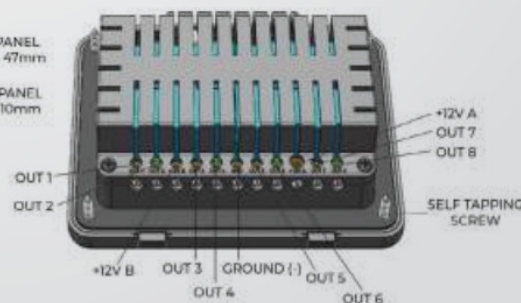

AECAA Pty Ltd trading as Automotive Electrical & 4WD Accessories
abn: 96 059 087 704

www.ae4a.com.au

East Coast Head Office: (07) 5540 7877

34 Notar Drive, Ormeau QLD 4209

West Coast Office: (08) 9358 7000

83-85 Welshpool Road,

Welshpool WA 6106

Documents / Resources



[KT Commander 4 Way and 8 Way Smart Touch Switch Panels](#) [pdf] Instruction Manual
Commander 4 Way and 8 Way Smart Touch Switch Panels, Commander 4 Way, Commander 8
Way, Smart Touch Switch Panels, Smart Touch Panels, Switch Panels, KT70954, KT70952

References

- [AE4A: Automotive Electrical & 4WD Accessories](#)

Manuals+.