



MW IRM-03 Series 3W Single Output Encapsulated Type Instruction Manual

[Home](#) » [MW](#) » MW IRM-03 Series 3W Single Output Encapsulated Type Instruction Manual 



IRM-03 Series 3W Single Output Encapsulated Type Instruction Manual



BS EN/EN62368-1
BS EN/EN60335-1



TPTC004 IEC62368-1

Contents

- [1 Features](#)
- [2 Applications](#)
- [3 Description](#)
- [4 Model Encoding](#)
- [5 SPECIFICATION](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

Features

- Universal AC input / Full range
- No load power consumption<0.075W
- Compact size
- Comply with
- EN55032 Class B without any additional components
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Isolation ClassII
- High reliability, low cost
- 3 years warranty

Applications

- Industrial electrical equipment
- Mechanical equipment
- Factory automation equipment
- Handheld electronic device

GTIN CODE MW Search


<https://www.meanwell.com/serviceGTIN.aspx>

Description

IRM-03 is a 3W miniature (37*24*15mm) AC-DC module-type power supply, ready to be soldered onto the PCB boards of various kinds of electronic instruments or industrial automation equipments. This product allows a universal input voltage range of 85~305VAC. The phenolic case and the fully-potted silicone enhance the heat dissipation and meet the anti-vibration demand up to 5G; moreover, it provides the fundamental resistance to dust and moisture. With the high efficiency up to 80% and the extremely low no-load power consumption below 0.075W, IRM-03 series fulfills the worldwide regulation for the low power consumption requirement for electronics. The entire series is a Class II design (no FG pin), incorporating the built-in EMI filtering components, enabling the compliance with EN55032 Class

B; the supreme EMC features keep the end electronic units from electromagnetic interference. In addition to module-type model, IRM-03 series also offers the SMD style model.

Model Encoding

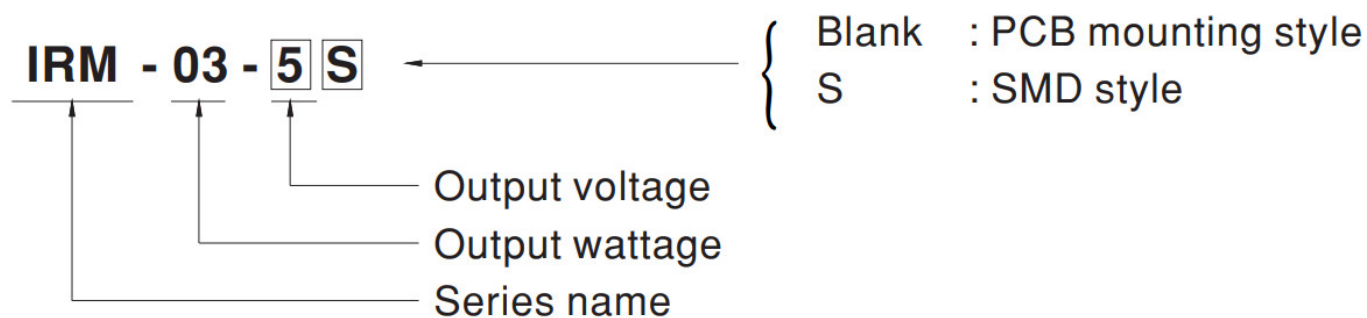


SPECIFICATION

MODEL		IRM-03-3.3	IRM-03.5	IRM-03.9	IRM-03-12	IRM-03-15	IRM-03.24
OUTPUT	DC VOLTAGE	3.3V	5V	9V	12V	15V	24V
	RATED CURRENT	900mA	600mA	333mA	250mA	200mA	125mA
	CURRENT RANGE	0 – 900mA	0 – 600mA	0 – 333mA	0 – 250mA	0 – 200mA	0 – 125mA
	RATED POWER	3W	3W	3W	3W	3W	3W
	RIPPLE & NOISE (max.) Note2	100mVp-p	100mVp-p	100mVp-p	150mVp-p	200mVp-p	240mVp-p
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.5%	±2.5%	±2.5%	±2.5%	±2.5%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	600ms, 30ms/230VAC 600ms, 30ms/115VAC at full load					
	HOLD UP TIME (Typ.)	40ms/230VAC 8ms/115VAC at full load					
INPUT	VOLTAGE RANGE	85 – 305VAC 120-430VDC					
	FREQUENCY RANGE	47 – 63Hz					
	EFFICIENCY (Typ.)	68%	172%	77%	78%	78%	180%
	AC CURRENT (Typ.)	70mA/115VAC 40mA/230VAC 35mA/277VAC					
	INRUSH CURRENT (Typ.)	10A/115VAC 20A/230VAC					


	LEAKAGE CURRENT	< 0.25mA/277VAC					
PROTECTION	OVERLOAD	105%-260% rated output power					
		Protection type : Hiccup mode, recovers automatically after fault condition is removed					
	OVER VOLTAGE	3.8 – 4.9V	5.2-6.8V	10.3 – 12.2 V	1 12.6 – 16.2V	1 15.75 – 20.3V	1 25.2 – 32.4V
		Protection type : Shutoff o/p voltage, clamping by zener diode					
ENVIRONMENT	WORKING TEMP.	-30 – +85°C (Refer to terating Curve")					
	WORKING HUMIDITY	20 – 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 – +100°C, 10 – 95% RH					
	TEMP. COEFFICIENT	±0.03%/°C (0- 50°C)					
	VIBRATION	10 – 500Hz, 5G 10min./1cycle, period for 60min. each along X, V, Z axes					
	LEAD TEMPERATURE	260t ,10s (max.)					
SAFETY & EMC	SAFETY STANDARDS	U L62368-1, TUV BS EN/EN62368, TUV BS EN/EN60335-1, EAC TP TC 004, BS MI CNS14336-1 approved, design refer to BS EN/EN61558-2-16 , 1E060601-1 (By request)					
	WITHSTAND VOLTAGE	I/P-0/P:3KVAC					
	ISOLATION RESISTANCE	I/P-0/P:100M Ohms / 500VDC/ 25°C/ 70% RH					
	EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020, CNS13438 Class B					
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN55024, heavy industry level (surge L-N : 1KV), EAC TP TC 020					
OTHERS	MTBF	10762.8K hrs min. Telcordia SR-332 (Bellcore) ; 2137.6K hrs min. MIL-HDBK-217 F (25°C)					
	DIMENSION	PCB mounting style : 37'24+15mm (L.W11-1) SMD style : 37424.16mm (ATH)					
	PACKING	PCB mounting style : 0.026Kg;560pcs/15.3Kg10.77CUFT SMD style :0.026Kg;560pcs/15.3Kg10.77CUFT					

NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.coralseviceDisclaimer.aspx</p>
------	---



Block Diagram

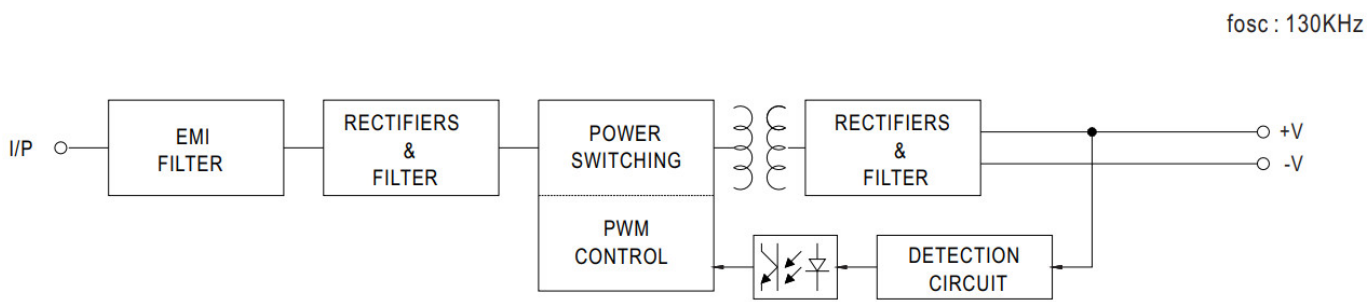

Derating Curve


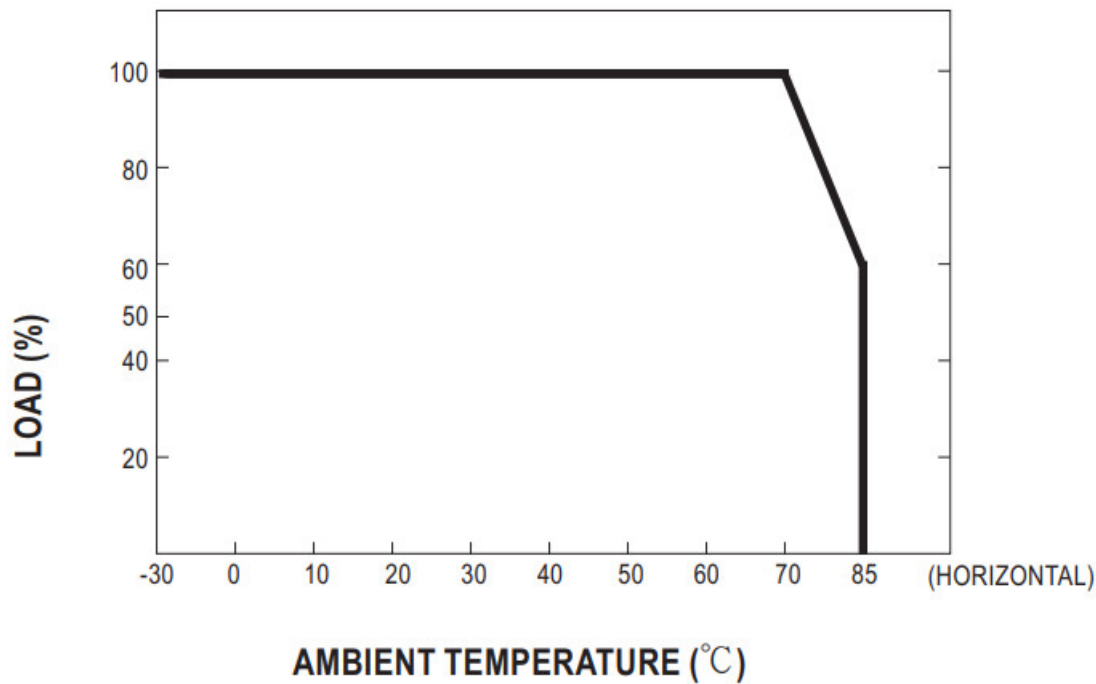


Output Derating VS Input Voltage

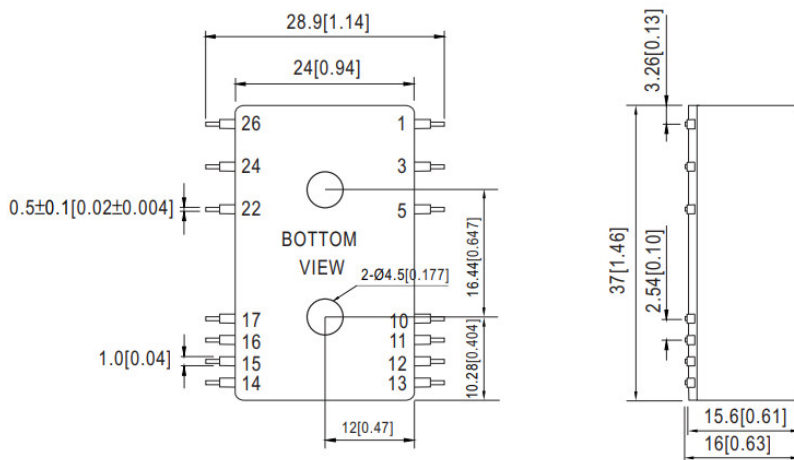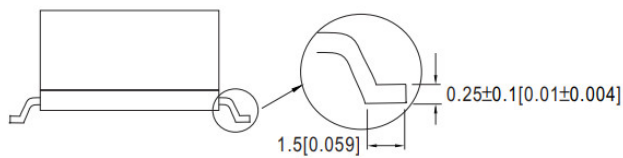

Pin NO.	Assignment
1	AC/L
3	AC/N
14	-Vo
16	+Vo
others	NC

Recommended PCB layout (for SMD style) (Reflow soldering method available)

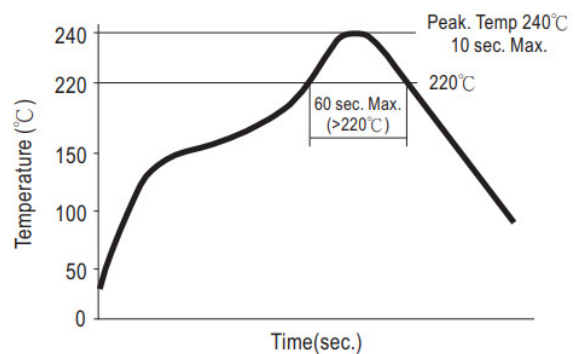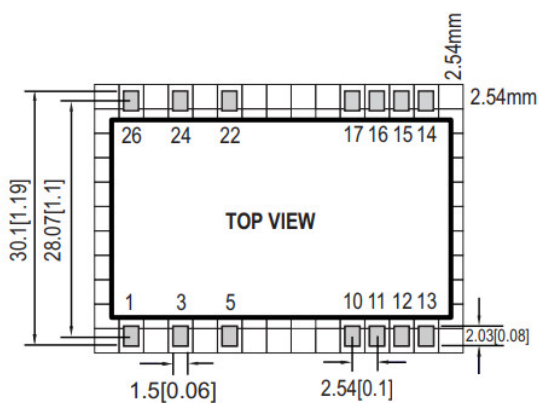

Remark : The curve applies only to the " Hot Air Reflow Soldering"

Installation Manual

Please refer to: <http://www.meanwell.com/manual.html>
Downloaded from [Arrow.com](http://www.arrow.com).

Documents / Resources

	<p>MW IRM-03 Series 3W Single Output Encapsulated Type [pdf] Instruction Manual IRM-03 Series 3W Single Output Encapsulated Type, IRM-03 Series, IRM-03 Series Encapsulated Type, 3W Single Output Encapsulated Type, Encapsulated Type</p>
--	--