

AJAX

AJAX Combi
Protect BCE
Direct CCTV
and
Networking



AJAX Combi Protect BCE Direct CCTV and Networking User Manual

[Home](#) » [ajax](#) » AJAX Combi Protect BCE Direct CCTV and Networking User Manual 

Contents

- 1 [AJAX Combi Protect BCE Direct CCTV and Networking](#)
- 2 [Functional Elements](#)
- 3 [Operating Principle](#)
- 4 [Before starting connection](#)
- 5 [Setting Up the Detector](#)
- 6 [Indication](#)
- 7 [Detector Testing](#)
- 8 [Installation of the detector](#)
- 9 [Detector Maintenance](#)
- 10 [Battery Replacement](#)
- 11 [Technical specifications](#)
- 12 [Compliance with standards](#)
- 13 [Warranty](#)
- 14 [FAQ](#)
- 15 [Documents / Resources](#)
 - 15.1 [References](#)
- 16 [Related Posts](#)

AJAX

AJAX Combi Protect BCE Direct CCTV and Networking




Combi Protect is a device combining a wireless motion detector with the viewing angle of 88.5° and distance up to 12 meters, as well as a glass break detector with the distance up to 9 meters. It can ignore animals and detects a person within the protected zone from the first step. It can operate for up to 5 years from a pre-installed battery and is used inside premises.

Combi Protect operates within the Ajax system, connected to the hub via the protected Jeweller protocol. The communication range is up to 1200 meters in the line of sight. In addition, the detector can be used as a part of third-party security central units via the Ajax uartBridge or Ajax oc Bridge Plus integration modules.


The detector is set up via a mobile application for iOS and Android based smartphones. The system notifies user of all events through push notifications, SMS messages and calls (if activated). The Ajax system is self-sustaining, but the user can connect it to the central monitoring station of a private security company. Buy motion and glass break detector Combi Protect

Functional Elements

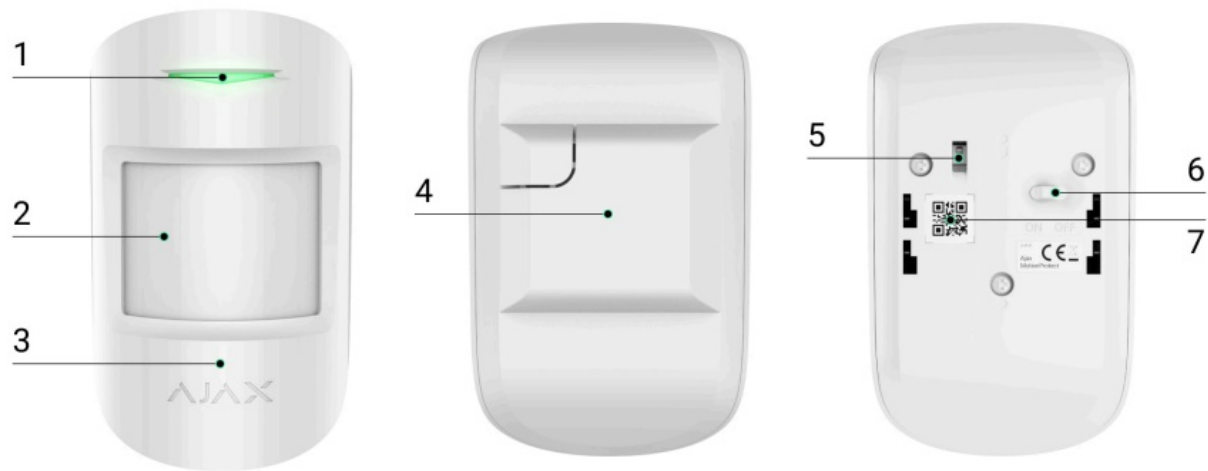

1. LED indicator
2. Motion detector lens
3. Microphone hole
4. SmartBracket attachment panel (perforated part is required for actuating the tamper in case of any attempt to dismantle the detector)
5. Tamper button
6. Device switch
7. QR code

Operating Principle

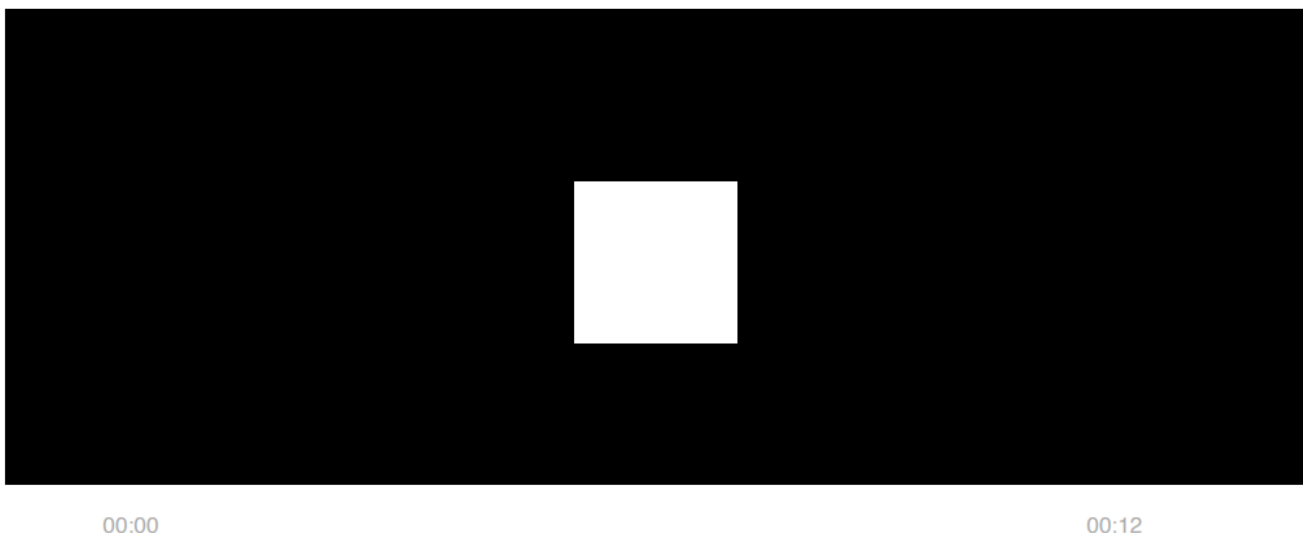

Combi Protect combines two types of security devices – motion detector and glass break detector. Thermal PIR sensor detects intrusion into a protected room by detecting moving objects with a temperature close to the temperature of the human body. However, the detector can ignore domestic animals if the suitable sensitivity has been chosen in the settings. The electret microphone is responsible for glass break detection. The intelligent event registration system requires a sequence of sounds of a specific nature –first dull blow, then ringing sound of falling chips, which prevents accidental actuation.

Combi Protect does not detect glass breaking if the glass is covered with any film: shockproof, sunscreen, decorative or other. In order to detect the breaking of this type glass, we recommend using a Door Protect Plus

wireless opening detector with shock and tilt sensor. After actuation, the armed detector immediately transmits an alarm signal to the hub, activating the sirens and notifying the user and security company. If before arming the system, the detector has detected motion, it will not arm immediately, but during the next inquiry by the hub.

Connecting the Detector to the Ajax system

The detector is connected to the hub and set up via the Ajax Security system mobile application. To establish connection please locate the detector and the hub within the communication range and follow the device adding procedure.


Before starting connection

1. Following the hub manual recommendations, install the Ajax application. Create an account, add the hub to the application, and create at least one room.
2. Switch on the hub and check the internet connection (via Ethernet cable and/or GSM network).
3. Ensure that the Hub is disarmed and does not update by checking its status in the mobile application.

Only users with administrator rights can add the device to the hub

How to connect the detector to the hub:

1. Select the Add Device option in the Ajax app.
2. Name the device, scan/write manually the QR Code (located on the body and packaging), and select the location room.
3. Select Add — the countdown will begin.
4. Switch on the device.

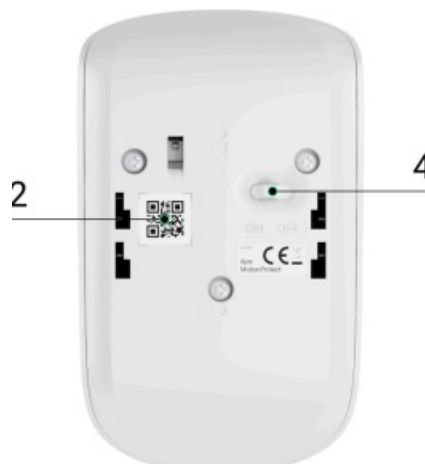

For detection and pairing to occur, the detector should be located within the coverage of the wireless network of the hub (at a single protected object). Request for connection to the hub is transmitted for a short time at the time of switching on the device. If connection to the Ajax Hub failed, switch off the detector for 5 seconds and retry. The detector connected to the hub will appear in the list of devices of the hub in the application. Update of the detector statuses in the list depends on the device inquiry time set in the hub settings, with the default value — 36 seconds.

Connecting the Detector to Third Party Security Systems

To connect the detector to a third party security central unit using the uart Bridge or oc Bridge Plus integration module, follow the recommendations in the manual of the respective device.

States

1. Devices



2. Combi Protect

Parameter	Value
Temperature	Temperature of the detector. Measured on the process or and changes gradually. Acceptable error between the value in the app and the room temperature — 2°C. The value is updated as soon as the detector identifies a temperature change of at least 2°C. You can configure a scenario by temperature to control automation devices Learn more
Jeweller Signal Strength	Signal strength between the hub and the detector
Battery Charge	Battery level of the device. Displayed as a percentage How battery charge is displayed in Ajax apps
Lid	The tamper mode of the detector, which reacts to the detachment of or damage to the body
ReX	Displays the status of using a radio signal range extender

Motion Detector Sensitivity	Sensitivity level of the motion detector
Motion Detector Always Active	If active, the motion detector is always in the armed mode
Glass Detector Sensitivity	Sensitivity level of the glass detector
Glass Detector Always Active	If active, the glass detector is always in the armed mode
Permanent Deactivation	<p>Shows the status of the device deactivation function:</p> <ul style="list-style-type: none"> • No – the device operates normally and transmits all events. • Lid only – the hub administrator has disabled notifications about triggering on the device body. • Entirely – the device is completely excluded from the system operation by the hub administrator. The device does not follow system commands and does not report alarms or other events. • By number of alarms – the device is automatically disabled when the number of alarms is exceeded (specified in the settings for Devices Auto Deactivation). The feature is configured in the Ajax PRO app.

Alarm Reaction


Operating Mode

Shows how the detector reacts to alarms:

- No the device operates normally and transmits all events.
- Lid only the hub administrator has disabled notifications about triggering on the device body.
- Entirely the device is completely excluded from the system operation by the hub administrator. The device does not follow system commands and does not report alarms or other events.
- By a number of alarms, the device is automatically disabled when the number of alarms is exceeded (specified in the settings for Devices Auto Deactivation). The feature is configured in the Ajax PRO app.
- Instant Alarm the armed detector immediately reacts to a threat and raises the alarm.
- Entry/Exit when a delay is set, the armed device starts the countdown and doesn't raise the alarm even if triggered until the countdown ends.
- Follower the detector inherits the delays from Entry/Exit detectors. However, when the Follower is triggered individually, it immediately raises the alarm.
- Delay When Entering, sec Delay time when entering

- Delay When Leaving, second Delay time when exiting
- Firmware Detector firmware version
- Device ID Device identifier

Setting Up the Detector

1. Devices 
2. CombiProtect
3. Settings

Setting	Value
First field	Detector name, can be edited
Room	Selecting the virtual room to which the device is assigned
Alarm LED indication	Allows you to disable the flashing of the LED indicator during an alarm. Available for devices with firmware version 5.55.0.0 or higher How to find the firmware version or the ID of the detector or device?
Motion Detector	If active, motion detector will be active
Motion Detector Sensitivity	Choosing the sensitivity level of the motion detector:High Normal Low

	<u>Why motion detectors react to animals and how to avoid it</u>
Motion Detector Always Active	If active, the detector always registers motion
Glass Detector Enabled	If active, glass breaking detector will be active
Glass Protection Sensitivity	<p>Choosing the sensitivity level of the glass detector:</p> <ul style="list-style-type: none"> • High • Normal • Low
Glass Protection Always Active	If active, the detector always registers glass breaking
Alert with a siren if motion detected	If active, <u>sirens</u> added to the system are activated when the motion detected
Alert with a siren if glass break detected	If active, <u>sirens</u> added to the system are activated when the glass break detected
Alarm Reaction	

Operating Mode	<p>Specify how this device will react to alarms:</p> <ul style="list-style-type: none"> • Instant Alarm – the armed detector immediately reacts to a threat and raises the alarm. • Entry/Exit – when a delay is set, the armed device starts the countdown and doesn't raise the alarm even if triggered until the countdown ends. • Follower – the detector inherits the delays from Entry/Exit detectors. However, when the Follower is triggered individually, it immediately raises the alarm.
Delay When Entering, sec	Selecting delay time when entering
Delay When Leaving, sec	Selecting delay time on exit
Delays in Night Mode	Delay turned on when using night mode

Arm in Night Mode	When turned on, the detector will switch to armed mode when using night mode
Jeweller Signal Strength Test	Switches the detector to the signal strength test mode
Detection Zone Test	Switches the detector to the detection area test
Attenuation Test	Switches the detector to the signal fade test mode (available in detectors with firmware version 3.50 and later)
	<p>Allows the user to disconnect the device without removing it from the system.</p> <p>Two options are available:</p> <ul style="list-style-type: none"> • Entirely – the device will not execute system commands or participate in automation scenarios, and the system will ignore device alarms and other notifications
	<u>Why motion detectors react to animals and how to avoid it</u>
Motion Detector Always Active	If active, the detector always registers motion
Glass Detector Enabled	If active, glass breaking detector will be active
Glass Protection Sensitivity	<p>Choosing the sensitivity level of the glass detector:</p> <ul style="list-style-type: none"> • High • Normal • Low
Glass Protection Always Active	If active, the detector always registers glass breaking
Alert with a siren if motion detected	If active, <u>sirens</u> added to the system are activated when the motion detected
Alert with a siren if glass break detected	If active, <u>sirens</u> added to the system are activated when the glass break detected
Alarm Reaction	

Indication



00:00

00:03



Turning on the detector	Lights up green for about one second	
Detector connection to the <u>hub</u> , <u>oc Bridge Plus</u> and <u>cartridge</u>	Lights up continuously for a few seconds	
Alarm/tamper activation	Lights up green for about one second	Alarm is sent once in 5 seconds
Battery needs replacing	During the alarm, slowly lights up green and goes off	Replacement of the detector battery is described in the <u>battery Replacement manual</u>

Detector Testing

The Ajax system allows conducting tests for checking the functionality of connected devices. The tests do not start straight away but within a period of 36 seconds when using the standard settings. The time of the start depends on the settings of the detector polling period (the paragraph on “Jeweller” settings in the hub settings). Jeweller Signal Strength Test

Detection Zone Test

Glass break detection zone Test Motion detection zone Test


Attenuation Test

- Installing the detector
- Selection of the installation site
- The controlled area and the efficiency of the security system depend on the location of the detector.
- The device developed only for indoor use.
- Location of the CombiProtect depends on the remoteness from the hub and presence of any obstacles between the devices hindering the radio signal transmission: walls, inserted floors, large-size objects located within the room.
- Check the signal level at the installation location
- If the signal level is at one bar, we cannot guarantee stable operation of the security system. Take all possible measures to improve the quality of the signal! As a minimum, move the device – even 20 cm shift can


significantly improve the quality of reception.

- If after moving the device still has a low or unstable signal strength, use a radio signal range extender.
- The direction of the detector lens should be perpendicular to the probable way of intrusion into the room. The detector microphone should be positioned at the angle of no more than 90 degrees relative to the window.
- Make sure that any furniture, domestic plants, vases, decorative or glass structures do not block the field of view of the detector.
- We recommend installing the detector at the height of 2.4 meters.

•

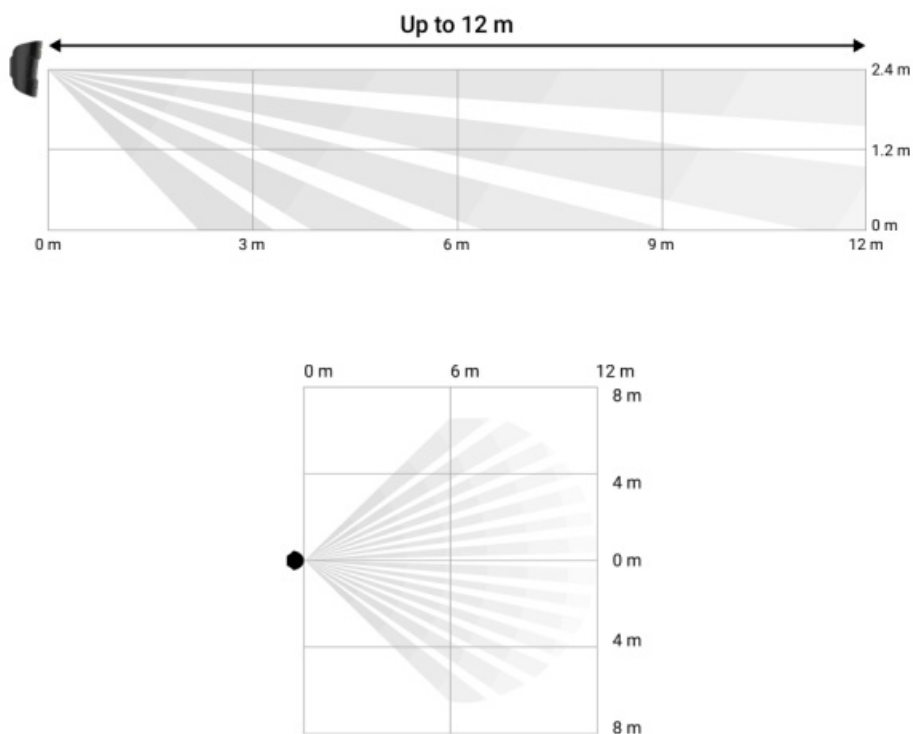

If the detector is not installed at the recommended height, this will reduce the area of the motion detection zone and impair the operation of the function of ignoring animals.

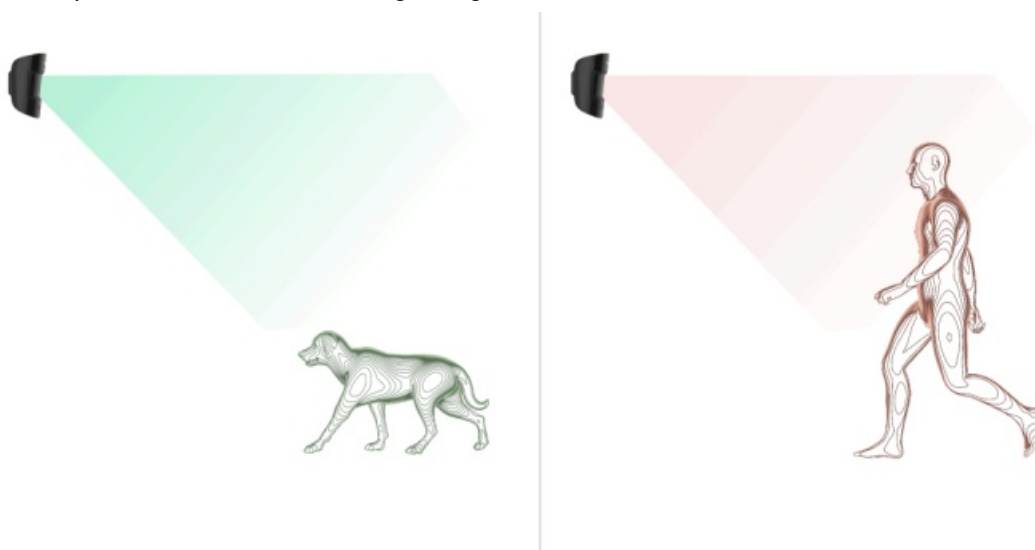


- Why motion detectors react to animals and how to avoid it



$h = 2.4 \text{ m}$



$h < 2.4 \text{ m}$

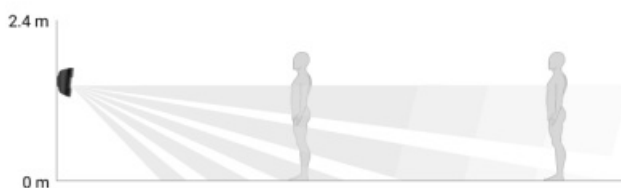


$h > 2.4 \text{ m}$



Installation of the detector

- Before installing the detector, make sure that you have selected the optimal location and it is in compliance with the guidelines contained in this manual

Combi Protect detector can be attached to a vertical surface or in a corner.

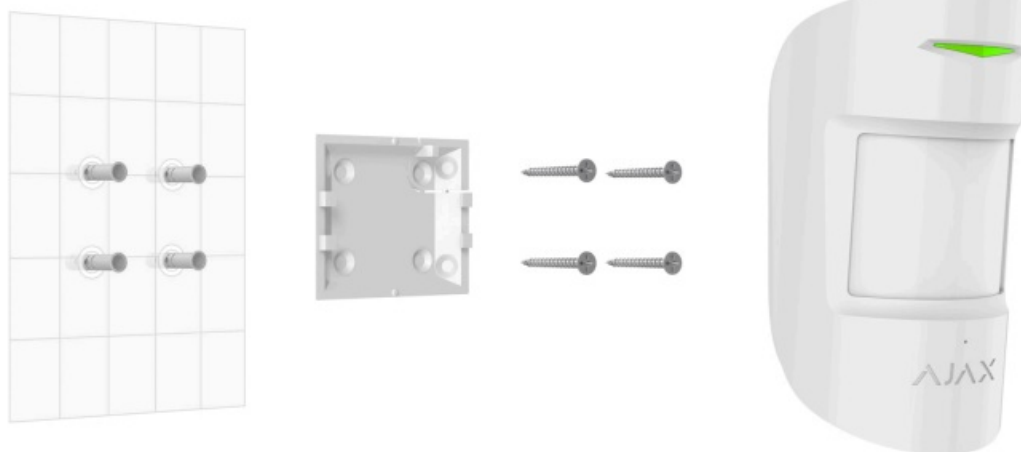

1. Attach the SmartBracket panel to the surface using bundled screws, using at least two fixing points (one of them – above the tamper). If you select other attachment hardware, make sure that they do not damage or deform the panel. The double-sided adhesive tape may only be used for temporary attachment of the detector. The tape will run dry in the course of time, which may result in the falling of the detector and the actuation of the security system. Furthermore, the device may fail from a hit, as a result of an impact.
2. Put the detector on the attachment panel. When the detector is fixed in SmartBracket, it will blink with an LED — this will be a signal that the tamper on the detector is closed.

- SmartBracket, it will blink with an LED — this will be a signal that the tamper on the detector is closed.
- SmartBracket, it will blink with an LED — this will be a signal that the Ajax Security System app and then tamper on the detector is closed.

If the detector is torn off from the surface or removed from the attachment panel, you will receive the notification.

Do not install the detector:

1. outside the premises (outdoors);
2. in the direction of the window, when the detector lens is exposed to direct sunlight;
3. Opposite any object with the rapidly changing temperature (e.g., electrical and gas heaters);
4. opposite any moving objects with the temperature close to that of the human body (oscillating curtains above the radiator);
5. opposite any reflective surfaces (mirrors);
6. at any places with fast air circulation (air fans, open windows or doors);
7. nearby any metal objects or mirrors causing attenuation and screening of the signal;
8. within any premises with the temperature and humidity beyond the range of permissible limits;
9. closer than 1 m from the hub.

Detector Maintenance

- Check the operational capability of the CombiProtect detector on a regular basis.
- Clean the detector body from dust, spider web and other contaminations as they appear. Use soft dry napkin suitable for equipment maintenance.
- Do not use for cleaning the detector any substances containing alcohol, acetone, gasoline and other active solvents. Wipe the lens very carefully and gently – any scratches on the plastic may cause reduction of the detector sensitivity.
- The pre-installed battery ensures up to 5 years of autonomous operation (with the inquiry frequency by the hub of 3 minutes). If the detector battery is discharged, the security system will send respective notices and the LED will smoothly light up and go out, if the detector detects any motion or if the tamper is actuated.
- To change the battery, switch off the device, loosen three screws and remove the front panel of the detector. Change the battery for a new one of type CR123A, observing the polarity.

How long Ajax devices operate on batteries, and what affects this

Battery Replacement

Technical specifications

All technical specifications of CombiProtect Jeweller

Compliance with standards

Complete Set

- ## Warranty

- ### The full text of the warranty

Technical support: support@ajax.systems


Email

Subscribe







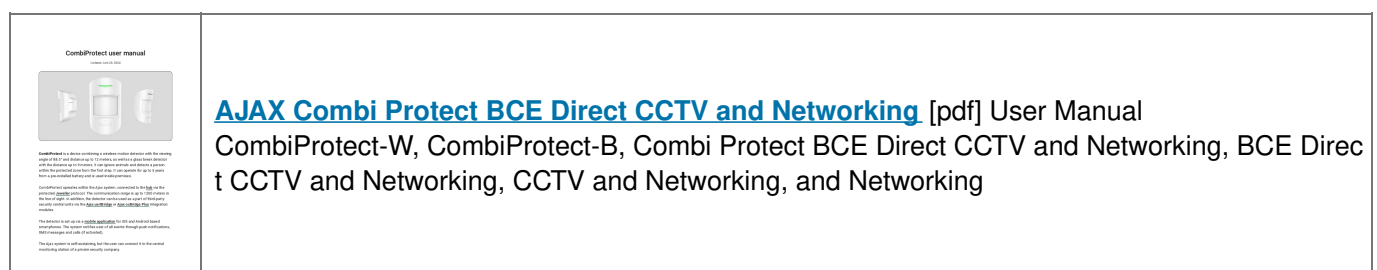












- **How do I adjust the sensitivity of the motion detector?**

- **What should I do if the device shows low battery charge?**

Documents / Resources



References

-  [Why motion detectors react to animals and how to avoid it | Blog Ajax](#)
-  [End user agreement - Ajax Systems](#)
-  [Security system control panels | Ajax Systems](#)
-  [Signal range extenders in the security system | Ajax Systems](#)
-  [Alarm sirens for Ajax security systems](#)
-  [uartBridge — Module for Ajax devices integration with third-party wireless alarms systems](#)
-  [Software | Ajax Systems](#)
-  [Warranty - Ajax Systems](#)
-  [How battery charge is displayed in Ajax apps | Ajax Systems Support](#)
-  [What is Devices Auto Deactivation and how it works | Ajax Systems Support](#)
-  [How to find out the device firmware version? | Ajax Systems Support](#)
-  [How long Ajax devices operate on batteries, and what affects this | Ajax Systems Support](#)
-  [How to deactivate a device without removing it from the system | Ajax Systems Support](#)
-  [How to change batteries in the CombiProtect | Ajax Systems Support](#)
-  [Jeweller radio protocol: technology and capabilities | Ajax Systems Support](#)
-  [How to create and configure a scenario in the Ajax system | Ajax Systems Support](#)
-  [What is Signal Attenuation Test | Ajax Systems Support](#)
-  [What is Detection zone test | Ajax Systems Support](#)
-  [What is Jeweller Signal Strength Test | Ajax Systems Support](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.