

AJAZZ NACODEX AKS068 PRO Wireless Mechanical Keyboard User Manual

Contents

- [1 AJAZZ NACODEX AKS068 PRO Wireless Mechanical Keyboard](#)
- [2 INTRODUCTION](#)
- [3 Product Specifications](#)
- [4 Indicator/switch description](#)
- [5 Sleep Mode Description](#)
- [6 Mode Connection Instructions](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)



AJAZZ NACODEX AKS068 PRO Wireless Mechanical Keyboard



INTRODUCTION

Thank you very much for purchasing our AJAZZ AKS068 PRO triple mode mechanical keyboard. This product has various cool functions and lighting effects. I hope it can bring you a new operating experience. For more operations, you can go to the AJAZZ official website to download the driver.

Product Specifications

- **Product brand:**  AJAZZ
- **Product model:** AJAZZ AKS068 PRO
- **Transmission method:** USB wired+2.4G+BT5.0

- **Interface type:** Type-C interface
- **Product size:** 323 x 124 x 28mm
- **Product weight:** 5,710g
- **Battery capacity:** 3000 mAh
- **Shell material:** ABS Injection molding
- **Keycap material:** Cherry profile PBT material
- **Lighting effects:** RGB (18 modes lighting effects)
- **Button layout:** 6S keys + metal volume knob
- **Product structure:** Gasket structure
- **Anti-ghosting:** All key
- **Supported systems:** Windows Vista/XP/7 /8/10/11, Mac

Indicator/switch description

Caps lock indicator light (Picture 1):


- Press the Caps lock key and the white light will stay on to turn on uppercase.
- Press the Caps lock key again and the white light will go off and return to lowercase.

Win lock indicator Light (Picture 1):

When the FN+win key, are pressed, the white light will always light up to indicate that win is locked, and it will return to normal after pressing the unlock key again. (With memory function)

Charging indicator light (Picture 1):

The red light flashes when the voltage is low, stays on when charging, and turns off when fully charged,

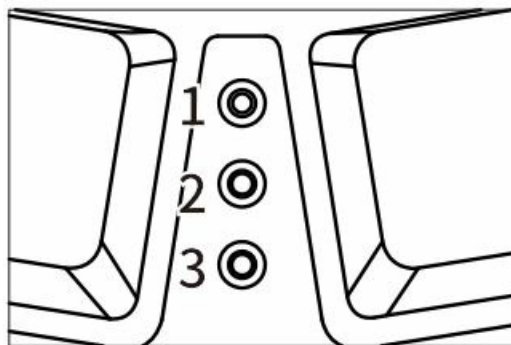


Picture 1

Mod & switch:

Three-stage switch, respectively left BT/ m ldd ie USS/right 2.4G.

Syst.m switch (Picture 2):


MAC on the left, WIN on the right [ALT•-, WIN-L interchange) default WIN system.

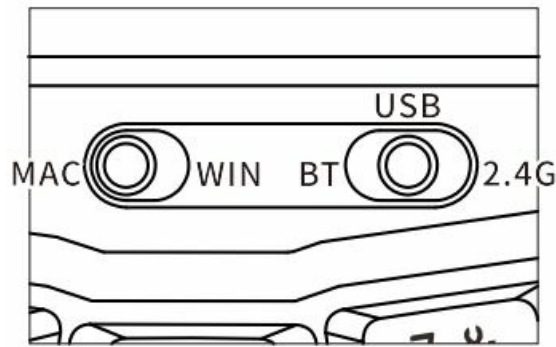

Picture 2

Knob (Pict1Jr&3):

Turn left V-, press MUTE, turn right V+

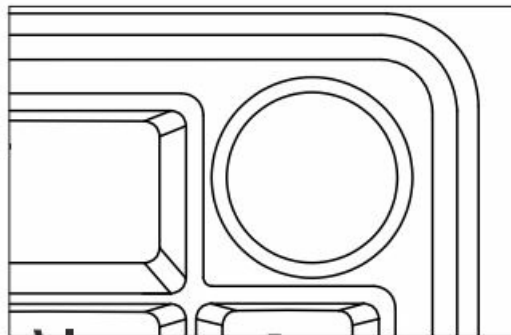

Picture 3

Sleep Mode Description

Power saving sleep state (level 1 sleep):

The keyboard backlight will turn off after 5 minutes of no key operation. Press any key to wake up the keyboard backlight and connect back to BT/2.4G;

Deep sleep State (level 2 sleep):

The keyboard will go into deep standby after 30 minutes of no key operation, BT will be disconnected and sleeping. Press any button to wake up the key bc, and backlight and connect back to BT/2.4G;

Low power state:

1. Low battery status: The battery indicator light flashes red slowly (indicator light 3)
2. Charging status: The battery Indicator light is always red (Indicator light 3)
3. When fully charged: the battery indicator light is off (indicator light 3)

Mode Connection Instructions

BT mode (after turning the switch to BT position): short press to switch, long press to pair

- **BT channel 1: Q {BT name: AKS\1Ei8-I}**

- **Switching method:** Short press the FN+Q key combination to switch the 81 channel. The Q key's light

flashes slowly and enters the reconnection state. If the reconnection is successful, the light will return to the normal light effect. If the reconnection is unsuccessful for 20s, it will enter sleep.

- **Pairing method:** Press and hold the FN+Q key combination for 3 seconds to pair. The Q key light (corresponding to blue) flashes quickly to enter the pairing mode. After the connection is successful, the Q key light stays on for 2 seconds and then returns to the overall backlight effect; pairing takes 1 minute. Failed to enter hibernation.

- **BT channel 2: W (BT name: AKS068-2)**

- **Switching method:** Short press the FN+W key combination to switch the BT channel. The W key light flashes slowly and enters the reconnection state. If the reconnection is successful, the light will return to the normal light effect. If the reconnection is unsuccessful for 20s, it will enter sleep.
- **Pairing method:** Press and hold the FN+W key combination for 3 seconds to pair. The W key light (corresponding to cyan) flashes quickly to enter the pairing mode. After the connection is successful, the W key light stays on for 2 seconds and then returns to the overall backlight effect; pairing is not completed for 1 minute. Successfully entered hibernation.

- **BT channel 3: E (BT name: AKS068-3)**


- **Switching method:** Short press the FN+E key combination to switch the BT channel. The light of the E key flashes slowly and enters the reconnection state. If the reconnection is successful, the light will return to the normal light effect. If the reconnection is unsuccessful for 20s, it will enter sleep.
- **Pairing method:** Press and hold the FN+E key combination for 3 seconds to pair. The E key light (corresponding to purple) flashes quickly to enter the pairing mode. After the connection is successful, the E key light stays on for 2 seconds and then returns to the overall backlight effect; pairing does not occur for 1 minute. Successfully entered hibernation.

Note: The current channel is displayed when the FN key is pressed. If the current connection is BT channel 2/BT2, the W key displays a green light when the FN key is pressed. It follows the current backlight when released (if the current connection is 2.4G mode, press W when the FN key is pressed, the R key displays a green light)

2.4G mode (switch to 2.4G mode): short press to switch, long press to pair

- **Switching method:** Turn the switch to the 2.4G position, the R key light flashes slowly (up to 30 seconds), plug in the receiver to enter the 2.4G connection mode, and enter sleep after 20s of failed connections.
- **Pairing method:** Press and hold FN+R for 3 seconds to force into the 2.4G pairing mode. The R button light (green light) flashes quickly and stops flashing after the pairing is completed (for after-sales). After the connection is successful, the R button light stays on for 2 seconds. Then return to the overall backlight effect;

Documents / Resources

	AJAZZ NACODEX AKS068 PRO Wireless Mechanical Keyboard [pdf] User Manual 2AY3H-AKS068PRO, 2AY3HAKS068PRO, aks068pro, AKS068 PRO Wireless Mechanical Keyboard, AKS068 PRO, Wireless Mechanical Keyboard, Mechanical Keyboard, Keyboard
---	---

References

- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.