




# AJAZZ AK832 BT Three Modes Mechanical Keyboard User Manual

[Home](#) » [AJAZZ](#) » AJAZZ AK832 BT Three Modes Mechanical Keyboard User Manual 

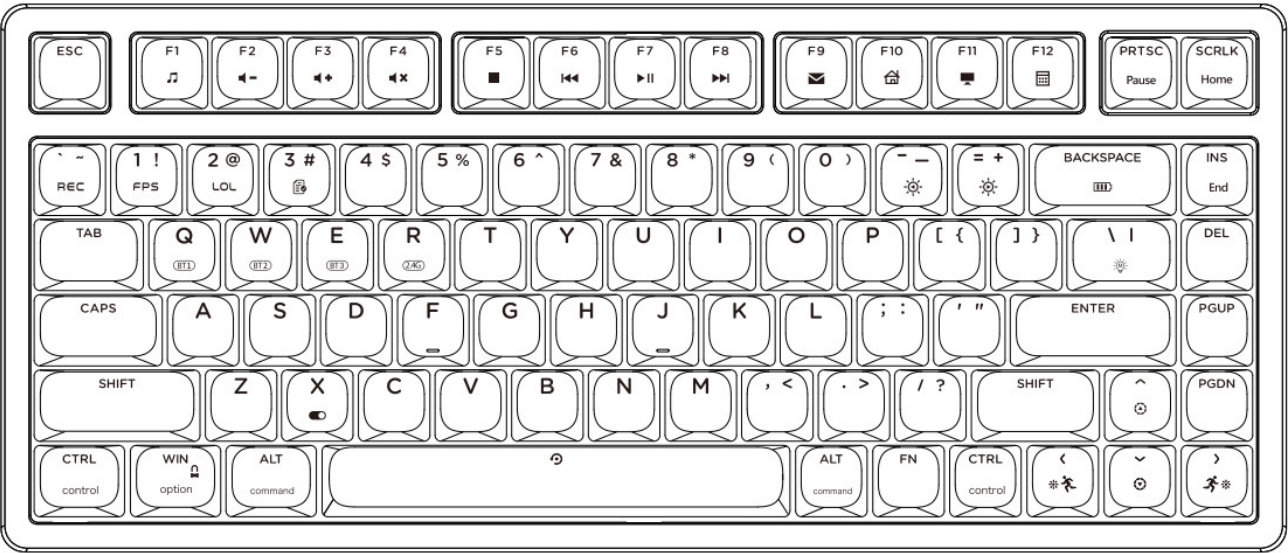


## Contents

- [1 AK832 BT Three Modes Mechanical Keyboard](#)
- [2 Product Specification](#)
- [3 Switch/Indicator Description](#)
- [4 Sleep Mechanism / Low Power State Light](#)
- [5 Mode Connection Instructions](#)
- [6 Instructions for Light Switch Combination Keys](#)
- [7 Multimedia Composite Function Description](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)
- [9 Related Posts](#)

## AK832 BT Three Modes Mechanical Keyboard

Thank you very much for purchasing our AJAZZ AK832. This product has various cool functions and backlit effects. I hope it can bring you a new operating experience. For more operations, go to AJAZZ official website to download the driver.


### Product Specification

Brand:  AJAZZ  
Product Model: AK832  
Transmission Method: USB wired + 2.4G wireless + 5.2 BT  
Interface Type: Type-C interface  
Product Size: 318x135x26mm  
Product Weight: ~ 700g  
Battery Capacity: 2500mAh  
Shell Material: ABS injection molding  
Keycap Material: PBT two-color injection molding  
Lighting Effect: Single light(20-modes LED effects)  
Key Layout: 83 keys  
Line Length: 1.6m  
No Conflict: Full key  
Support System: Windows Vista /7/8/10/11, MAC, Android

### Switch/Indicator Description


#### Switch description

TYPE-C: USB mode Type-C interface



2.4G: 2.4G mode, toggle the switch to the right


USB: wired mode (default), toggle the switch to the middle

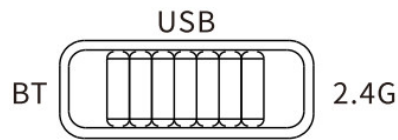

BT: BT mode, toggle the switch to the left

Mac: Mac system, toggle the switch to the right

Win: Win system (default), toggle the switch to the left

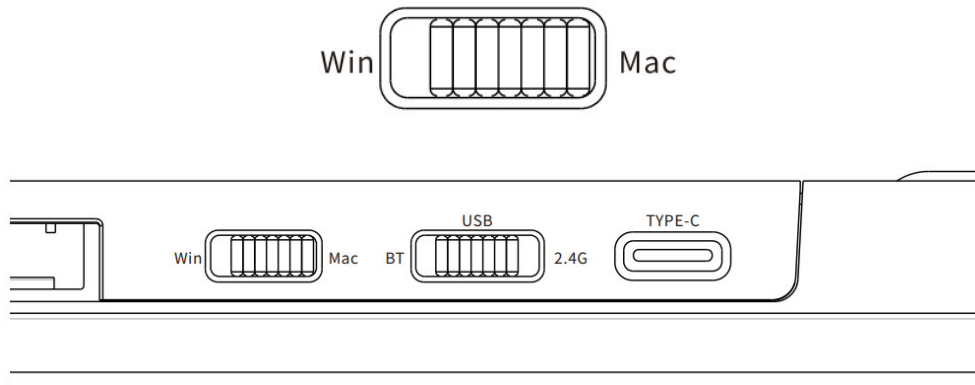

### Indicator Light Description

2.1. Low battery indicator: When the battery is lower than 10-20%, the light of the Fn key flashes slowly, and it is always on when charging. In any mode, the power cord is plugged in to enter the charging state. After the full light goes out, it follows the system backlight.

2.2. Caps lock switch indicator light: The white light is always on when the Caps lock is turned on, and the white light is off when the Caps lock is turned off.

2.3. FN+WIN key-L: lock the function of the left window (Win lock light, the win key indicates that the white light is always on to indicate locking, and it will return to normal after unlocking)

2.4. Connection mode indicator light: (no indicator light, button light indicator)

1. BT1 (Q key): flashes slowly when connecting back, flashes quickly when pairing, and flashes slowly when the button light is disconnected when the connection is successful.
2. BT2 (W key): flashes slowly when connecting back, flashes quickly when pairing, and flashes slowly when the button light is disconnected when the connection is successful.
3. BT3 (E key): flashes slowly when connecting back, flashes quickly when pairing, and flashes slowly when the button light is disconnected when the connection is successful.
4. 2.4G (R key): flashes slowly when connecting back, flashes quickly when pairing, and flashes slowly when the button light is disconnected when the connection is successful.
5. Wired: Switch the switch to the wired position, insert the data cable to connect with the existing wire.

### Sleep Mechanism / Low Power State Light

#### 1. Sleep Mode

(1)Power-saving sleep state: the backlight will be turned off after 5 minutes without key operation on the keyboard, press any button to wake up the backlight of the keyboard and connect back to BT/2.4G;

(2)Deep sleep state: deep standby after 30 minutes of no key operation on the keyboard, Bluetooth is disconnected and sleeps, press any key to wake up the keyboard backlight and connect back to BT/2.4G;

#### 2. Low Power State

- (1) Low power status: when the battery is lower than 20%, the FN key light flashes white slowly
- (2) Charging status: FN button white light is always on
- (3) State when fully charged: After the FN button light is off, the light effect follows the system

## **Mode Connection Instructions**

4.1, BT mode connection: switch to BT gear

BT name: AK832 5.2-1 (AK832 3.0-1) . AK8325.2-2 (AK832 3.0-2) . AK832 5.2-3 (AK832 3.0-3)

BT channel 1 (AK832 5.2-1) (AK832 3.0-1):

1. Switching method: Short press the FN+Q combination key to switch the Bluetooth channel, the light of the Q button flashes slowly, and enters the reconnection state. After the reconnection is successful, the light returns to the normal lighting effect.
2. Pairing method: Long press the FN+Q key combination for 3 seconds to pair, the light of the Q key flashes quickly to enter the code pairing mode, and the light returns to the normal light effect after the connection is successful.

BT channel 2 (AK832 5.2-2) (AK832 3.0-2):

1. Switching Method: Short press the FN+W key combination to switch the Bluetooth channel, the W key light flashes slowly, and enters the reconnection state. After the reconnection is successful, the light returns to the normal lighting effect.
2. Pairing Method: Long press the FN+W combination key for 3 seconds to pair, the light of the W key will flash quickly to enter the code pairing mode, and the light will return to the normal light effect after the connection is successful.

BT channel 3 (AK832 5.2-3) (AK832 3.0-3):

1. Switching method: short press the FN+E combination key to switch the Bluetooth channel, the light of the E key flashes slowly, and enters the reconnection state. After the reconnection is successful, the light returns to the normal lighting effect.
2. Pairing method: Long press the FN+E combination key for 3 seconds to pair, the light of the E key flashes quickly to enter the code pairing mode, and the light returns to the normal light effect after the connection is successful.

### **4.2,2.4G Mode Connection: switch to 2.4G**

1. Switching method: Turn the switch to the 2.4G gear, the R key light will flash slowly (up to 30 seconds), and insert the receiver to enter the 2.4G connection mode.
2. Pairing method: Press and hold FN+R for 3 seconds to force to enter the 2.4G pairing mode. The light of the R button will flash quickly and stop flashing after the code pairing is completed (for after-sales). After the pairing is successful, exit the code pairing and the light will return to normal.

### **4.3, Wired Mode Connection: switch to USB**

Switching method: switch the switch to the wired position, plug in the USB data cable to connect with the cable.

## Instructions for Light Switch Combination Keys

### FN+\\:Lighting effect switching, 20 kinds of lighting effects cycle in turn:

FN+↑ : Light brightness + (five gears, the default factory maximum brightness) when adjusted to the limit, the backlight flashes 3 times to indicate

FN+↓: Light brightness – (five gears) when the backlight is turned off when it is adjusted to the limit

FN+←: Lighting effect direction adjustment

FN+ →: Lighting effect direction adjustment

FN+“\_”: Light speed – (five gears, factory default three gears) when it is adjusted to the limit, the backlight flashes 3 times to indicate

FN+“=”: Light speed + (five gears) when adjusted to the limit, the backlight flashes 3 times to indicate

FN+X: Turn off the light\turn on the light

FN+Prtsc: Pause

FN+Scrlk: Home

FN+Ins: End

FN+Space bar: Press and hold for 3-5 seconds, the keyboard backlight will flash 3 times, and the factory settings will be restored

FN+Backspace: Press the FN+BACK key combination (support 2.4G/Bluetooth mode), the backlight is off, and the lights of the number keys 1 to 0 show the proportion of power (for example: lis on, indicating 10% power, 1-2 is on, means 20%)

### Turn On Light Recording Mode:


1. FN+1□/2@/3#: Three sets of game lighting effects can be customized (all white lights are preset)
2. FN+1! Default FPS mode □ W/A/S/D/↑/↓ /←/→
3. FN+2@ default LOL mode: Q/W/E/R/D/G/F/B/V/L-Ctrl/L-Alt/Tab/Space/1-6/Esc
4. FN+3# Default 37-key office mode: A-Z 26 English letters/[ ]/;/ ' /./,///↑ /↓/←/→
5. FN+~: Record/save the lighting mode for the lighting effects of the above three game modes

Clear light recording: Reset to clear light recording.

### Multimedia Composite Function Description

Key Combinati on	WIN System	NIAC System	Key Combinati on	WIN System	MAC System
FN+F1	Media Player	Screen Brightne ss –	FN+F7	Play / Pause	Previous Piece
FN+F2	Volume-	Screen Brightne ss +	FN+F8	Next Song	Play/ Pause
FN+F3	Volume +	Mission Control	FN+F9	Mail	Next Song
FN+F4	Mute	Console	FN+F10	Browser	Mute
FN+F5	Stops/ Play	Backlight Bright ness-	FN+F11	My Computer	Volume –
FN+F6	Previous Song	Backlight Bright ness+	FN+F12	Calculator	Volume +
FN+ Win	Lock the Win key, the light of the Win key is always on after locking, and then press to unlock				

## Documents / Resources

	<p><a href="#">AJAZZ AK832 BT Three Modes Mechanical Keyboard</a> [pdf] User Manual AK832 BT Three Modes Mechanical Keyboard, AK832, BT Three Modes Mechanical Keyboard, Three Modes Mechanical Keyboard, Modes Mechanical Keyboard, Mechanical Keyboard, Keyboard</p>
---	--

## References

- [User Manual](#)