



# AJAZZ AK992 B Three-Modes Mechanical Keyboard User Manual

[Home](#) » [AJAZZ](#) » AJAZZ AK992 B Three-Modes Mechanical Keyboard User Manual 

## AJAZZ AK992 B Three-Modes Mechanical Keyboard User Manual



Thank you very much for purchasing our AJAZZ AK992. It has various cool functions and lighting effects. I hope it can bring you a new operating experience, Driver download: <http://www.a-jazz.com>

## Contents

### 1 RGB Version

- 1.1 1. Product Specification
- 1.2 2. Description of the switch indicator light
- 1.3 3. Mode Connection Description
- 1.4 4. Backlight Mode
- 1.5 5. Combination Key Function Description
- 1.6 6. Instructions for Hot Plug Operation Steps

### 2 Single Light Version

- 2.1 1. Description of the switch indicator light
- 2.2 2. Mode Connection Description
- 2.3 3. Backlight Mode
- 2.4 4. Combination Key Function Description
- 2.5 5. Instructions for Hot Plug Operation Steps

### 3 No Backlight Session

- 3.1 1. Description of the switch indicator light
- 3.2 2. Mode Connection Description
- 3.3 3. Backlight Mode
- 3.4 4. Combination Key Function Description
- 3.5 5. Instructions for Hot Plug Operation Steps

### 4 Documents / Resources

## RGB Version

### 1. Product Specification

Brand: AJAZZ

Product Model: AK992

Transmission Method: USB wired + 2.4G wireless + 5.0 Bluetooth

Interface Type: Type-C interface

Product Size: 391x142x40mm

Product Weight:  $\approx$ 800g

Lithium Battery: (Light Version) 4000mAh, (No Light Version) 1200mAh

Shell Material: ABS injection molding

Keycap Material: PBT OEM Key cap / Original factory side engraved key cap


Wire Length: 1.6M

Lighting Effect: RGB/18 lamp effects, single light/20 lamp effects


Key Layout: 99 keys + 1 knob

Matrix: Full key anti-ghosting

Support System: Windows Vista /7/8/10/11, MAC, Android

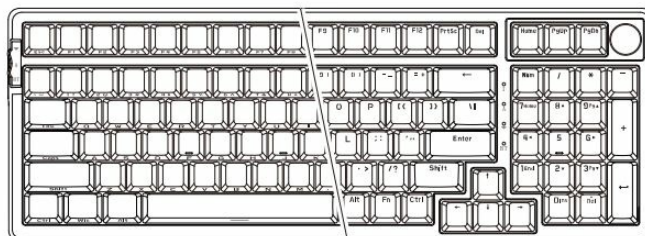

### 2. Description of the switch indicator light



(Figure1)

### Switch function (Figure 1)

The three-speed toggle switch switches 2.4G/USB/Bluetooth mode, and the default USB mode.

☰ : 2.4G mode;

“A” : Wired mode;

“BT” : Bluetooth mode.

Indicator light: the light is white light (picture 2)

1、Indicator “1” : Num switch;

2、Indicator “A” : Caps switch;

3、Indicator ☰ : 2.4G mode;

4、Indicator “BT” : Bluetooth mode.

5、FN key: ① FN indicates the power, the charging red light FN is always red, and the system is fully charged

(connect the USB cable in any wireless mode to charge the device);

② When the keyboard power is low, the FN key backlight is red The light blinks continuously to indicate charging.



(Figure2)

### Scroll Wheel Function

①Volume adjustment function:

Turn the knob to the right: volume +

Turn the knob to the left: volume -

②Mute: Press to mute, then press to restore.

Note: By default, the volume adjustment will follow the computer, and the computer volume will jump 2 bars after turning one bar.

### Sleep Mode

Power-Saving Sleep: The backlight turns off after 5 minutes of no key operation on the keyboard, press any button to wake up the backlight of the keyboard and reconnect to Bluetooth/2.4G;

Deep Sleep: Deep standby after 30 minutes of no key operation on the keyboard, Bluetooth/2.4G is disconnected and sleeps, press any button to wake up the keyboard backlight and reconnect to Bluetooth/2.4G.

## 3. Mode Connection Description

### 1、Bluetooth Mode Connection: FN+Q / W / E

Bluetooth name: AK992 5.0-1 (corresponding to channel Q), AK992 5.0-2 (corresponding to channel W), AK992 5.0-3 (corresponding to channel E);

①Long press the FN+Q (or W or E) key combination for 3 seconds to pair, the Q key light (blue light) flashes quickly to enter the code pairing mode, the connection is successful, and the light returns to the normal light effect;

②Short press the FN+Q/W/E key combination to switch the Bluetooth channel, the light of the paired Q/W/E key flashes slowly, the connection is successful, and the light returns to normal light effect;

### 2、2.4G Mode Connection: FN+R

Long press FN+R to enter 2.4G strong code pairing, the R button light (green light) flashes quickly to enter the code pairing mode, and the light returns to the default state when the code is successfully paired. (It has been paired before leaving the factory, and the user does not need to pair the code)

### 3、Wired Mode Connection:

Toggle the switch to the "A" position, which is the wired mode.

## 4. Backlight Mode

FN+| Lighting effect switching, 18 kinds of lighting effects cycle in turn

FN+1!, 2@, 3# can customize three groups of game lighting effects (preset all white light)

FN+1!: Default FPS mode—W / A / S / D / ↑ / ↓ / ← / →

FN+2@: Default LOL mode—Q / W / E / R / D / G / F / B / V / L-Ctrl / L-Alt / Tab / Space / 1-6 / Esc

FN+3#: Default 37-key office mode: A-Z 26 English letters / [ / ] / ; / ' / . / , / / / ↑ / ↓ / ← / →

FN+~: Record/save the lighting mode for the lighting effects of the above three game modes, press the button once during recording for a color, a total of 8 colors

FN+↑: Light brightness + (five gears) adjusted to the highest backlight indicator flashes 3 times to indicate

FN+↓: Light brightness - (five levels) adjusted to the lowest backlight indicator flashes 3 times to indicate

FN+←: Dynamic lighting direction switching

FN+→: Switch backlight color

FN+~: Light speed - (five gears) adjusted to the lowest backlight indicator flashes 3 times to indicate

FN+=+: Light speed + (five gears) adjusted to the lowest backlight indicator flashes 3 times to indicate

## 5. Combination Key Function Description

FN+F1: Multimedia player

FN+F5: Stop

FN+F9: E-Mail

FN+S: Windows system (factory default)

FN+A: MAC system

FN+X: Turn off the overall backlight (including the charging indicator light)

FN+Space bar: Press and hold for 3-5 seconds, the keyboard light flashes 3 times, clear the light effect and Bluetooth device

FN+Left WIN: Lock the function of the left window (Win lock light, the win key indicates that the white light is always on, indicating that it is locked, and it will return to normal after unlocking)

FN+BACK (Delete key) : Press the FN+BACK combination key (supports 2.4G/Bluetooth mode), the backlight is off, and the lights of the number keys 1 to 0 show the percentage of power.

FN+F2: Volume down

FN+F6: Previous song

FN+F10: Browser

FN+F3: Volume up

FN+F7: Play/Pause

FN+F11: My Computer


FN+F4: Mute

FN+F8: Next song


FN+F12: Calculator

## 6. Instructions for Hot Plug Operation Steps


Hot-swappable: Different shafts can be replaced, and you can customize your unique typing experience. 3/5pin is compatible with most mechanical switches.

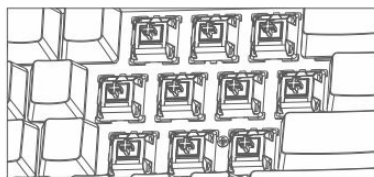


① Pull out the keycap with a key puller

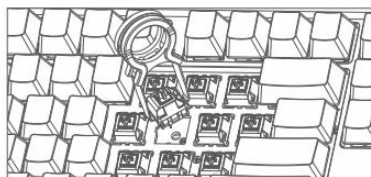

② Shaft puller to pull out the shaft

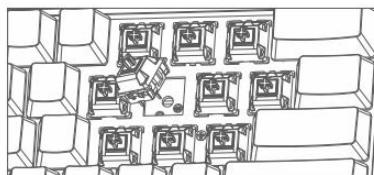

③ Calibrate pins and holes

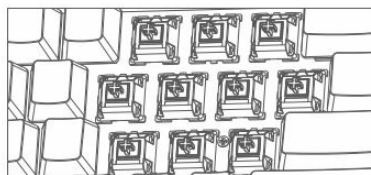


④ Vertically and lightly press the switch

## Single Light Version

### 1. Description of the switch indicator light





(Figure1)

## Switch function (Figure 1)

The three-speed toggle switch switches 2.4G/USB/Bluetooth mode, and the default USB mode.

☰ : 2.4G mode;

“A” : Wired mode;

“BT” : Bluetooth mode.

Indicator light: the light is white light (picture 2)

1、Indicator “1” : Num switch;

2、Indicator “A” : Caps switch;


3、Indicator ☰ : 2.4G mode;

4、Indicator “BT” : Bluetooth mode.

5、FN key: ① FN indicates the power, the charging red light FN is always red, and the system is fully charged

(connect the USB cable in any wireless mode to charge the device);

② When the keyboard power is low, the FN key backlight is red The light blinks continuously to indicate charging.

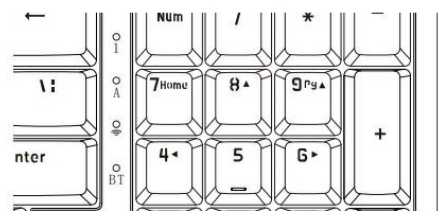

(Figure2)

## Scroll Wheel Function

①Volume adjustment function:

Turn the knob to the right: volume +

Turn the knob to the left: volume -

②Mute: Press to mute, then press to restore.

Note: By default, the volume adjustment will follow the computer, and the computer volume will jump 2 bars after turning one bar.

## Sleep Mode

Power-Saving Sleep: The backlight turns off after 5 minutes of no key operation on the keyboard, press any button to wake up the backlight of the keyboard and reconnect to Bluetooth/2.4G;

Deep Sleep: Deep standby after 30 minutes of no key operation on the keyboard, Bluetooth/2.4G is disconnected and sleeps, press any button to wake up the keyboard backlight and reconnect to Bluetooth/2.4G.

## 2. Mode Connection Description

### 1、Bluetooth Mode Connection: FN+Q / W / E

Bluetooth name: AK992 5.0-1 (corresponding to channel Q), AK992 5.0-2 (corresponding to channel W), AK992 5.0-3 (corresponding to channel E);

①Long press the FN+Q (or W or E) key combination for 3 seconds to pair, the Q key light (blue light) flashes quickly to enter the code pairing mode, the connection is successful, and the light returns to the normal light effect;

②Short press the FN+Q/W/E key combination to switch the Bluetooth channel, the light of the paired Q/W/E key flashes slowly, the connection is successful, and the light returns to normal light effect;

### 2、2.4G Mode Connection: FN+R

Long press FN+R to enter 2.4G strong code pairing, the R button light (green light) flashes quickly to enter the code pairing mode, and the light returns to the default state when the code is successfully paired. (It has been paired before leaving the factory, and the user does not need to pair the code)

### 3、Wired Mode Connection:

Toggle the switch to the "A" position, which is the wired mode.

## 3. Backlight Mode

FN+| Lighting effect switching, 18 kinds of lighting effects cycle in turn

FN+1!, 2@, 3# can customize three groups of game lighting effects (preset all white light)

FN+1!: Default FPS mode—W / A / S / D / ↑ / ↓ / ← / →

FN+2@: Default LOL mode—Q / W / E / R / D / G / F / B / V / L-Ctrl / L-Alt / Tab / Space / 1-6 / Esc

FN+3#: Default 37-key office mode: A-Z 26 English letters / [ / ] / ; / ' / . / , / / / ↑ / ↓ / ← / →

FN+~: Record/save the lighting mode for the lighting effects of the above three game modes, press the button once during recording for a color, a total of 8 colors

FN+↑: Light brightness + (five gears) adjusted to the highest backlight indicator flashes 3 times to indicate

FN+↓: Light brightness - (five levels) adjusted to the lowest backlight indicator flashes 3 times to indicate

FN+←: Dynamic lighting direction switching

FN+→: Switch backlight color

FN+~: Light speed - (five gears) adjusted to the lowest backlight indicator flashes 3 times to indicate

FN+=+: Light speed + (five gears) adjusted to the lowest backlight indicator flashes 3 times to indicate

## 4. Combination Key Function Description

FN+F1: Multimedia player

FN+F5: Stop

FN+F9: E-Mail

FN+S: Windows system (factory default)

FN+A: MAC system

FN+X: Turn off the overall backlight (including the charging indicator light)

FN+Space bar: Press and hold for 3-5 seconds, the keyboard light flashes 3 times, clear the light effect and Bluetooth device

FN+Left WIN: Lock the function of the left window (Win lock light, the win key indicates that the white light is always on, indicating that it is locked, and it will return to normal after unlocking)

FN+BACK (Delete key) : Press the FN+BACK combination key (supports 2.4G/Bluetooth mode), the backlight is off, and the lights of the number keys 1 to 0 show the percentage of power.

FN+F2: Volume down

FN+F6: Previous song

FN+F10: Browser

FN+F3: Volume up

FN+F7: Play/Pause

FN+F11: My Computer


FN+F4: Mute

FN+F8: Next song


FN+F12: Calculator

## 5. Instructions for Hot Plug Operation Steps


Hot-swappable: Different shafts can be replaced, and you can customize your unique typing experience. 3/5pin is compatible with most mechanical switches.

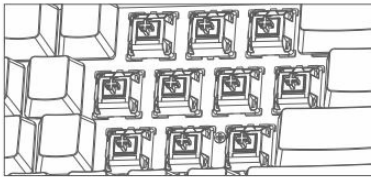


① Pull out the keycap with a key puller

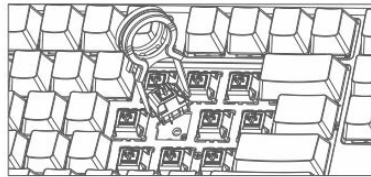

② Shaft puller to pull out the shaft

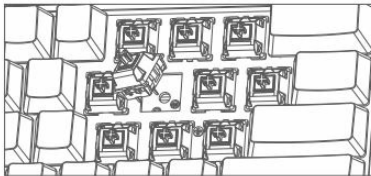

③ Calibrate pins and holes

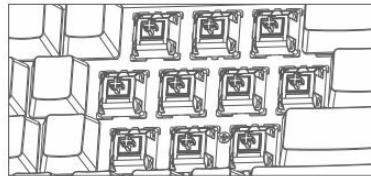


④ Vertically and lightly press the switch

## No Backlight Session

### 1. Description of the switch indicator light





(Figure1)

## Switch function (Figure 1)

The three-speed toggle switch switches 2.4G/USB/Bluetooth mode, and the default USB mode.

☰ : 2.4G mode;

“A” : Wired mode;

“BT” : Bluetooth mode.

Indicator light: the light is white light (picture 2)

1、Indicator “1” : Num switch;

2、Indicator “A” : Caps switch;


3、Indicator ☰ : 2.4G mode;

4、Indicator “BT” : Bluetooth mode.

5、FN key: ① FN indicates the power, the charging red light FN is always red, and the system is fully charged

(connect the USB cable in any wireless mode to charge the device);

② When the keyboard power is low, the FN key backlight is red The light blinks continuously to indicate charging.

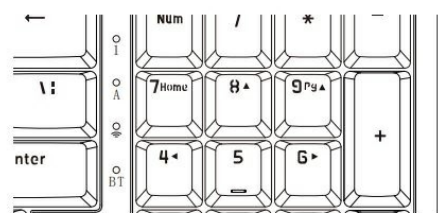

(Figure2)

## Scroll Wheel Function

①Volume adjustment function:

Turn the knob to the right: volume +

Turn the knob to the left: volume -

②Mute: Press to mute, then press to restore.

Note: By default, the volume adjustment will follow the computer, and the computer volume will jump 2 bars after turning one bar.

## Sleep Mode

Power-Saving Sleep: The backlight turns off after 5 minutes of no key operation on the keyboard, press any button to wake up the backlight of the keyboard and reconnect to Bluetooth/2.4G;

Deep Sleep: Deep standby after 30 minutes of no key operation on the keyboard, Bluetooth/2.4G is disconnected and sleeps, press any button to wake up the keyboard backlight and reconnect to Bluetooth/2.4G.

## 2. Mode Connection Description

### 1、Bluetooth Mode Connection: FN+Q / W / E

Bluetooth name: AK992 5.0-1 (corresponding to channel Q), AK992 5.0-2 (corresponding to channel W), AK992 5.0-3 (corresponding to channel E);

①Long press the FN+Q (or W or E) key combination for 3 seconds to pair, the Q key light (blue light) flashes quickly to enter the code pairing mode, the connection is successful, and the light returns to the normal light effect;

②Short press the FN+Q/W/E key combination to switch the Bluetooth channel, the light of the paired Q/W/E key flashes slowly, the connection is successful, and the light returns to normal light effect;

### 2、2.4G Mode Connection: FN+R

Long press FN+R to enter 2.4G strong code pairing, the R button light (green light) flashes quickly to enter the code pairing mode, and the light returns to the default state when the code is successfully paired. (It has been paired before leaving the factory, and the user does not need to pair the code)

### 3、Wired Mode Connection:

Toggle the switch to the "A" position, which is the wired mode.

## 3. Backlight Mode

FN+| Lighting effect switching, 18 kinds of lighting effects cycle in turn

FN+1!, 2@, 3# can customize three groups of game lighting effects (preset all white light)

FN+1!: Default FPS mode—W / A / S / D / ↑ / ↓ / ← / →

FN+2@: Default LOL mode—Q / W / E / R / D / G / F / B / V / L-Ctrl / L-Alt / Tab / Space / 1-6 / Esc

FN+3#: Default 37-key office mode: A-Z 26 English letters / [ / ] / ; / ' / . / , / / / ↑ / ↓ / ← / →

FN+~: Record/save the lighting mode for the lighting effects of the above three game modes, press the button once during recording for a color, a total of 8 colors

FN+↑: Light brightness + (five gears) adjusted to the highest backlight indicator flashes 3 times to indicate

FN+↓: Light brightness - (five levels) adjusted to the lowest backlight indicator flashes 3 times to indicate

FN+←: Dynamic lighting direction switching

FN+→: Switch backlight color

FN+~: Light speed - (five gears) adjusted to the lowest backlight indicator flashes 3 times to indicate

FN+=+: Light speed + (five gears) adjusted to the lowest backlight indicator flashes 3 times to indicate


## 4. Combination Key Function Description

FN+F1: Multimedia player	FN+F2: Volume down	FN+F3: Volume up	FN+F4: Mute
FN+F5: Stop	FN+F6: Previous song	FN+F7: Play/Pause	FN+F8: Next song
FN+F9: E-Mail	FN+F10: Browser	FN+F11: My Computer	FN+F12: Calculator


FN+S: Windows system (factory default)  
 FN+A: MAC system  
 FN+X: Turn off the overall backlight (including the charging indicator light)  
 FN+Space bar: Press and hold for 3-5 seconds, the keyboard light flashes 3 times, clear the light effect and Bluetooth device  
 FN+Left WIN: Lock the function of the left window (Win lock light, the win key indicates that the white light is always on, indicating that it is locked, and it will return to normal after unlocking)  
 FN+BACK (Delete key) : Press the FN+BACK combination key (supports 2.4G/Bluetooth mode), the backlight is off, and the lights of the number keys 1 to 0 show the percentage of power.

5. Instructions for Hot Plug Operation Steps

Hot-swappable: Different shafts can be replaced, and you can customize your unique typing experience. 3/5pin is compatible with most mechanical switches.

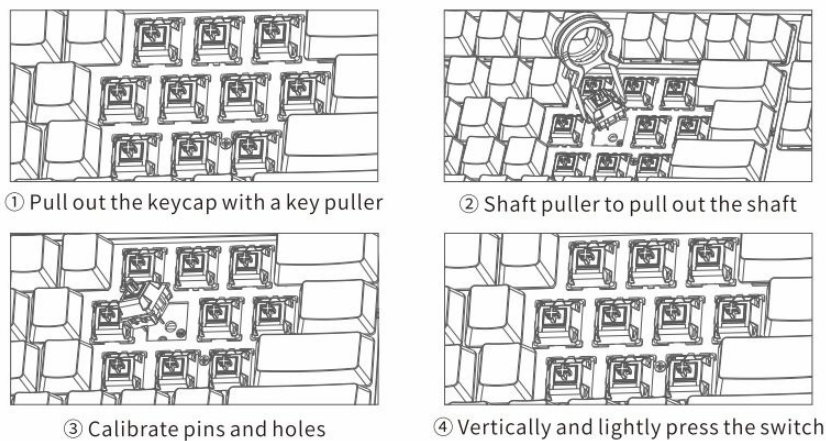

Documents / Resources

	<p><a href="#">AJAZZ AK992 B Three-Modes Mechanical Keyboard</a> [pdf] User Manual            AK992 B Three-Modes Mechanical Keyboard, AK992, B Three-Modes Mechanical Keyboard, Mechanical Keyboard, Keyboard</p>
---	--