




AJAZZ AK992 BT Three-Modes Mechanical Keyboard User Manual

[Home](#) » [AJAZZ](#) » AJAZZ AK992 BT Three-Modes Mechanical Keyboard User Manual



×
NACODEX^x

AK992 BT
Three-Modes Mechanical Keyboard
User Manual

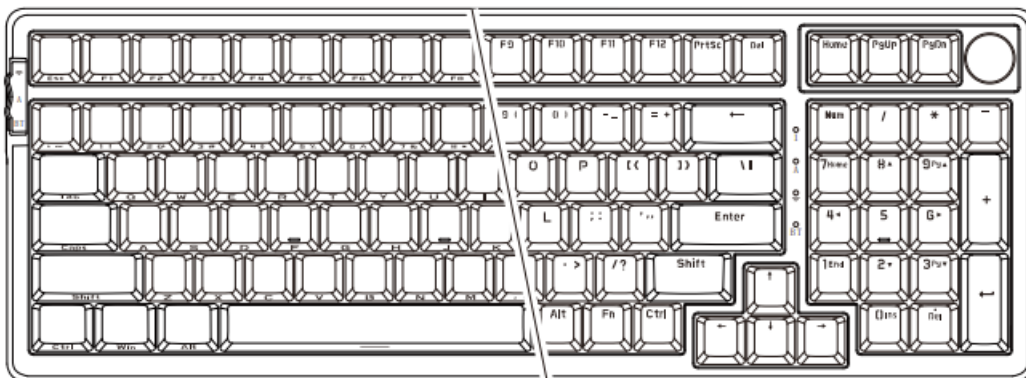

Contents [[hide](#)]

- [1 AK992 BT Three-Modes Mechanical Keyboard](#)
- [2 Product Specification](#)
- [3 Description of the switch indicator light](#)
- [4 Mode Connection Description](#)
- [5 Backlight Mode](#)
- [6 Combination Key Function Description](#)
- [7 Instructions for Hot Plug Operation Steps](#)
- [8 Single Light version](#)
- [9 No Backlight Sersion](#)
- [10 Documents / Resources](#)
- [11 Related Posts](#)

AK992 BT Three-Modes Mechanical Keyboard

Thank you very much for purchasing our AJAZZ AK992. It has various cool functions and lighting effects. I hope it can bring you a new operating experience. Driver download: <http://www.a-jazz.com/>

Product Specification

Brand: AJAZZ

Product Model: AK992

Transmission Method: USB wired + 2.4G wireless + 5.0 Bluetooth

Interface Type: Type-C interface

Product Size: 391x142x40mm

Product Weight: ≈ 800g

Lithium Battery: (Light Version) 4000mAh, (No Light Version) 1200mAh

Shell Material: ABS injection molding

Keycap Material: PBT OEM Key cap / Original factory side engraved key cap

Wire Length: 1.6M

Lighting Effect: RGB/18 lamp effects, single light/20 lamp effects

Key Layout: 99 keys + 1 knob

Matrix: Full key anti-ghosting

Support System: Windows Vista /7/8/10/11, MAC, Android

RGB Version

Description of the switch indicator light

Switch function (Figure 1)



(Figure1)


The three-speed toggle switch switches 2.4G/USB/Bluetooth mode, and the default USB mode.

📶 : 2.4G mode;


“A” : Wired mode;

“BT”: Bluetooth mode.

Indicator light: the light is white light (picture 2)

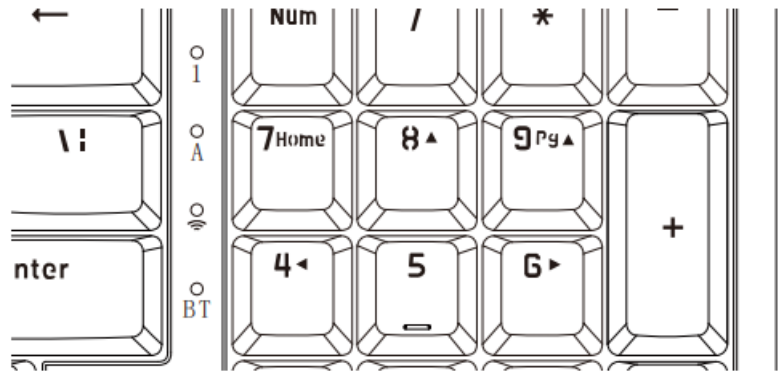

(Figure2)

1. Indicator “1” :Num switch;
2. Indicator “A” :Capsswitch;
3. Indicator  :2.4G mode;
4. Indicator “BT” : Bluetooth mode.
5. FN key:
 1. FN indicates the power, the charging red light FN is always red, and the system is fully charged (connect the USB cable in any wireless mode to charge the device);
 2. When the keyboard power is low, the FN key backlight is red The light blinks continuously to indicate charging.

Scroll Wheel Function

1. Volume adjustment function:
 - Turn the knob to the right: volume +
 - Turn the knob to the left: volume –
2. Mute:
 - Press to mute, then press to restore.

Note: By default, the volume adjustment will follow the computer, and the computer volume will jump 2 bars after turning one bar.

Sleep Mode

Power-Saving Sleep: The backlight turns off after 5 minutes of no key operation on the keyboard, press any button to wake up the backlight of the keyboard and reconnect to Bluetooth/2.4G;

Deep Sleep: Deep standby after 30 minutes of no key operation on the keyboard, Bluetooth/2.4G is disconnected and sleeps, press any button to wake up the keyboard backlight and reconnect to Bluetooth/2.4G.

Mode Connection Description

1. Bluetooth Mode Connection: FN+Q/W/E

Bluetooth name: AK992 5.0-1 (corresponding to channel Q), AK992 5.0-2 (corresponding to channel W), AK992 5.0-3 (corresponding to channel E);

1. Long press the FN+Q (or W or E) key combination for 3 seconds to pair, the Q key light (blue light) flashes quickly to enter the code pairing mode, the connection is successful, and the light returns to the normal light

effect; ”

2. Short press the FN+Q/W/E key combination to switch the Bluetooth channel, the light of the paired Q/W/E key flashes slowly, the connection is successful, and the light returns to normal light effect;

2. **2.4G Mode Connection: FN+R**

Long press FN+R to enter 2.4G strong code pairing, the R button light (green light) flashes quickly to enter the code pairing mode, and the light returns to the default state when the code is successfully paired. (It has been paired before leaving the factory, and the user does not need to pair the code)

3. **Wired Mode Connection:**

Toggle the switch to the “A” position, which is the wired mode.

Backlight Mode

FN-E\ Lighting effect switching, 18 kinds of lighting effects cycle in turn

FN+1!, 2@, 3# can customize three groups of game lighting effects (preset all white light)

FN+1!: Default FPS mode-W/A/S/ D / ↑ / ↓ / ← / →

FN+2@: Default LOL mode-Q /W/E/R/D/G/F/B/V/ L-Ctrl / L-Alt / Tab / Space /1-6/ Esc

FN+3#: Default 37-key office mode: A-Z 26 English letters/ [/]/ ; / ‘ / . / , / / / ↑ / ↓ / ← / →

FN+~: Record/save the lighting mode for the lighting effects of the above three game modes, press the button once during recording for a color, a total of 8 colors

FN+ ↑ : Light brightness + (five gears) adjusted to the highest backlight indicator flashes 3 times to indicate

FN+ ↓ : Light brightness – (five levels) adjusted to the lowest backlight indicator flashes 3 times to indicate

FN+←: Dynamic lighting direction switching

FN+→: Switch backlight color

FN+-_: Light speed – (five gears) adjusted to the lowest backlight indicator flashes 3 times to indicate

FN+=+: Light speed + (five gears) adjusted to the lowest backlight indicator flashes 3 times to indicate

Combination Key Function Description

FN+F1: Multimedia player FN+F5: Stop FN+F9: E-Mail	FN+F2: Volume down FN+F6: Previous song FN+F10: Browser	FN+F3: Volume up FN+F7: Play/Pause FN+F11: My Computer
--	---	--

FN+S: Windows system (factory default)

FN+A: MAC system

FN+X: Turn off the overall backlight (including the charging indicator light)


FN+Space bar: Press and hold for 3-5 seconds, the keyboard light flashes 3 times, clear the light effect and Bluetooth device

FN+Left WIN: Lock the function of the left window (Win lock light, the win key indicates that the white light is always on, indicating that it is locked, and it will return to normal after unlocking)


FN+BACK (Delete key): Press the FN+BACK combination key (supports 2.4G/Bluetooth mode), the backlight is off, and the lights of the number keys 1 to 0 show the percentage of power.

Instructions for Hot Plug Operation Steps


Hot-swappable: Different shafts can be replaced, and you can customize your unique typing experience. 3/5pin is compatible with most mechanical switches.

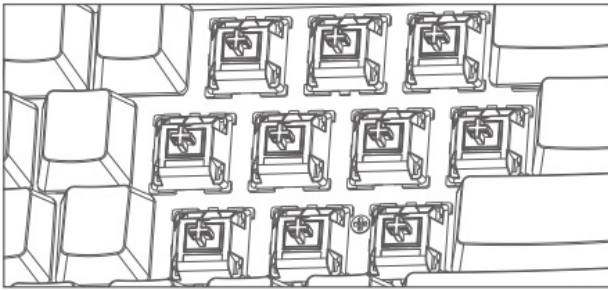


① Pull out the keycap with a key puller

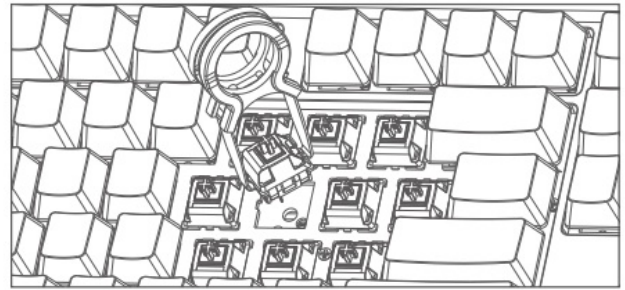

② Shaft puller to pull out the shaft

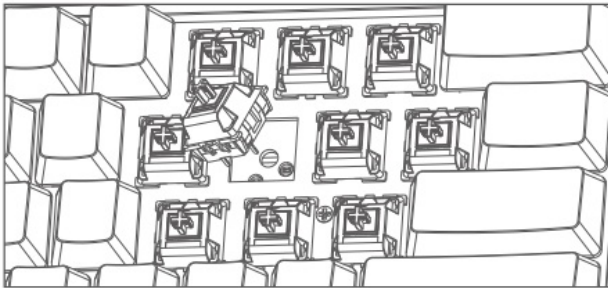

③ Calibrate pins and holes

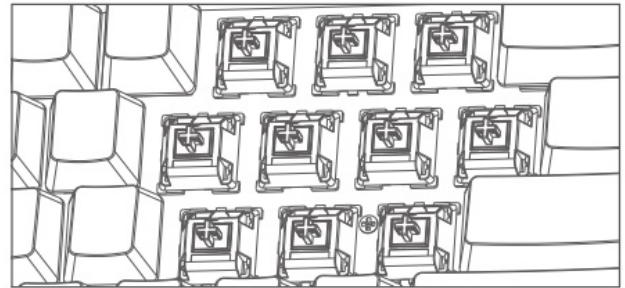

④ Vertically and lightly press the switch

Single Light version

1. Description of the switch indicator light

Switch function (Figure 1)



(Figure1)


The three-speed toggle switch switches 2.4G/USB/Bluetooth mode, and the default USB mode.

📶 : 2.4G mode;

“A” : Wired mode;


“BT”: Bluetooth mode.

Indicator light: the light is white light (picture 2)

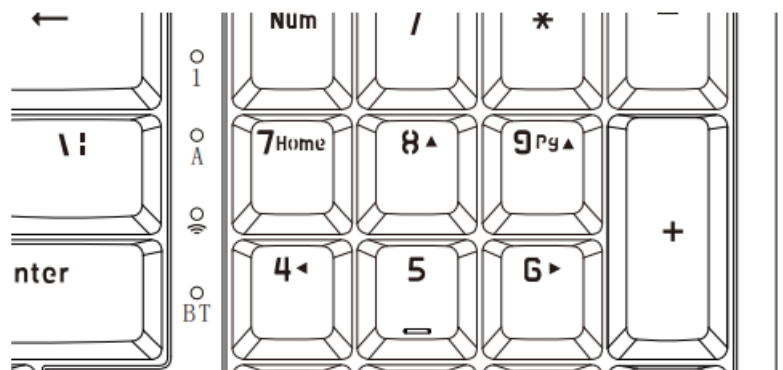

(Figure2)

1. Indicator “1” :Num switch;

2. Indicator “A” :Capsswitch;
3. Indicator  :2.4G mode;
4. Indicator “BT” : Bluetooth mode.
5. FN key:
 1. FN indicates the power, the charging red light FN is always red, and the system is fully charged (connect the USB cable in any wireless mode to charge the device);
 2. When the keyboard power is low, the FN key backlight is red The light blinks continuously to indicate charging.

2. Scroll Wheel Function

1. Volume adjustment function:
 - Turn the knob to the right: volume +
 - Turn the knob to the left: volume –
2. Mute:
 - Press to mute, then press to restore.

Note: By default, the volume adjustment will follow the computer, and the computer volume will jump 2 bars after turning one bar.

Sleep Mode

Power-Saving Sleep: The backlight turns off after 5 minutes of no key operation on the keyboard, press any button to wake up the backlight of the keyboard and reconnect to Bluetooth/2.4G;

Deep Sleep: Deep standby after 30 minutes of no key operation on the keyboard, Bluetooth/2.4G is disconnected and sleeps, press any button to wake up the keyboard backlight and reconnect to Bluetooth/2.4G.

3. Mode Connection Description

1. Bluetooth Mode Connection: FN+Q/W/E

Bluetooth name: AK992 5.0-1 (corresponding to channel Q), AK992 5.0-2 (corresponding to channel W), AK992 5.0-3 (corresponding to channel E);

1. Long press the FN+Q (or W or E) key combination for 3 seconds to pair, the Q key light (blue light) flashes quickly to enter the code pairing mode, the connection is successful, and the light returns to the normal light effect; ”

2. Short press the FN+Q/W/E key combination to switch the Bluetooth channel, the light of the paired Q/W/E key flashes slowly, the connection is successful, and the light returns to normal light effect;

2. 2.4G Mode Connection: FN+R

Long press FN+R to enter 2.4G strong code pairing, the R button light (green light) flashes quickly to enter the code pairing mode, and the light returns to the default state when the code is successfully paired. (It has been paired before leaving the factory, and the user does not need to pair the code)

3. Wired Mode Connection:

Toggle the switch to the “A” position, which is the wired mode.

4. Backlight Mode

FN-E| Lighting effect switching, 18 kinds of lighting effects cycle in turn

FN+1!, 2@, 3# can customize three groups of game lighting effects (preset all white light)

FN+1!: Default FPS mode-W/A/S/ D / ↑ / ↓ / ← / →

FN+2@: Default LOL mode-Q /W/E/R/D/G/F/B/V/ L-Ctrl / L-Alt / Tab / Space /1-6/ Esc

FN+3#: Default 37-key office mode: A-Z 26 English letters/ []/ ; / ' / . / , / / / ↑ / ↓ / ← / →

FN+~: Record/save the lighting mode for the lighting effects of the above three game modes, press the button once during recording for a color, a total of 8 colors

FN+ ↑ : Light brightness + (five gears) adjusted to the highest backlight indicator flashes 3 times to indicate

FN+ ↓ : Light brightness – (five levels) adjusted to the lowest backlight indicator flashes 3 times to indicate

FN+←: Dynamic lighting direction switching

FN+→: Switch backlight color

FN+_-: Light speed – (five gears) adjusted to the lowest backlight indicator flashes 3 times to indicate

FN+=+: Light speed + (five gears) adjusted to the lowest backlight indicator flashes 3 times to indicate

5. Combination Key Function Description

FN+F1: Multimedia player FN+F5: Stop FN+F9: E-Mail	FN+F2: Volume down FN+F6: Previous song FN+F10: Browser	FN+F3: Volume up FN+F7: Play/Pause FN+F11: My Computer
--	---	--

FN+S: Windows system (factory default)

FN+A: MAC system

FN+X: Turn off the overall backlight (including the charging indicator light)


FN+Space bar: Press and hold for 3-5 seconds, the keyboard light flashes 3 times, clear the light effect and Bluetooth device

FN+Left WIN: Lock the function of the left window (Win lock light, the win key indicates that the white light is always on, indicating that it is locked, and it will return to normal after unlocking)


FN+BACK (Delete key): Press the FN+BACK combination key (supports 2.4G/Bluetooth mode), the backlight is off, and the lights of the number keys 1 to 0 show the percentage of power.

6. Instructions for Hot Plug Operation Steps


Hot-swappable: Different shafts can be replaced, and you can customize your unique typing experience. 3/5pin is compatible with most mechanical switches.

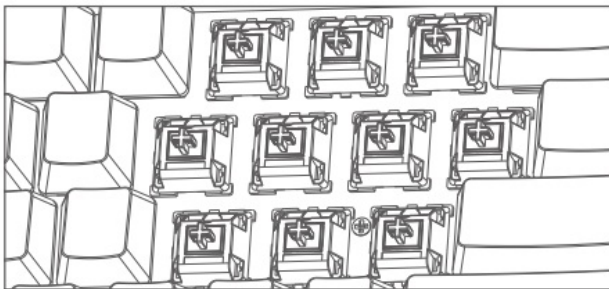


① Pull out the keycap with a key puller

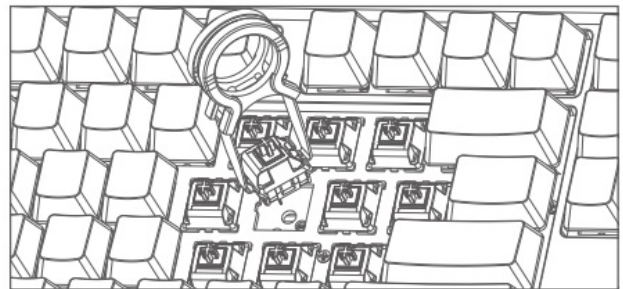

② Shaft puller to pull out the shaft

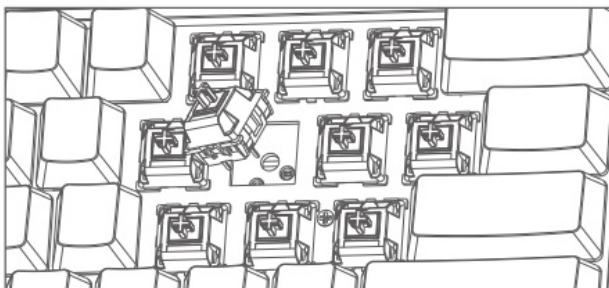

③ Calibrate pins and holes

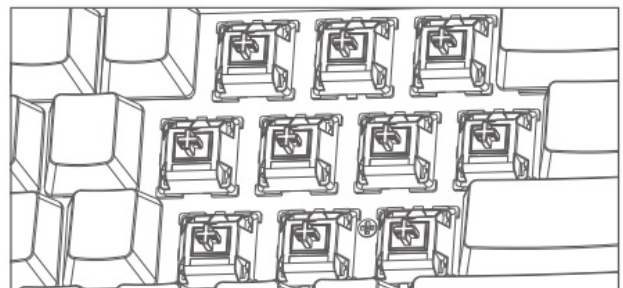

④ Vertically and lightly press the switch

No Backlight Sersion

1. Description of the switch indicator light

Switch function (Figure 1)



(Figure1)


The three-speed toggle switch switches 2.4G/USB/Bluetooth mode, and the default USB mode.

📶 : 2.4G mode;

“A” : Wired mode;

“BT”: Bluetooth mode.

Indicator light: the light is white light (picture 2)

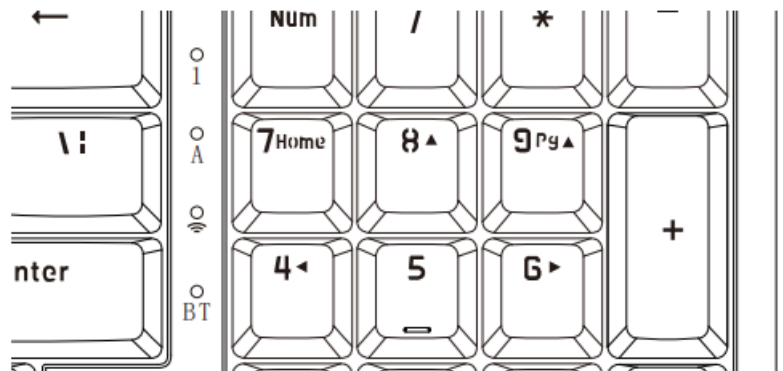

(Figure2)

1. Indicator “1” :Num switch;
2. Indicator “A” :Capsswitch;
3. Indicator 📶 :2.4G mode;
4. Indicator “BT” : Bluetooth mode.
5. FN key:
 1. FN indicates the power, the charging red light FN is always red, and the system is fully charged (connect the USB cable in any wireless mode to charge the device);
 2. When the keyboard power is low, the FN key backlight is red The light blinks continuously to indicate charging.

2. Scroll Wheel Function

1. Volume adjustment function:

Turn the knob to the right: volume +

Turn the knob to the left: volume –
2. Mute:

Press to mute, then press to restore.

Note: By default, the volume adjustment will follow the computer, and the computer volume will jump 2 bars after

turning one bar.

Sleep Mode

Power-Saving Sleep: The backlight turns off after 5 minutes of no key operation on the keyboard, press any button to wake up the backlight of the keyboard and reconnect to Bluetooth/2.4G;

Deep Sleep: Deep standby after 30 minutes of no key operation on the keyboard, Bluetooth/2.4G is disconnected and sleeps, press any button to wake up the keyboard backlight and reconnect to Bluetooth/2.4G.

3. Mode Connection Description

1. Bluetooth Mode Connection: FN+Q/W/E

Bluetooth name: AK992 5.0-1 (corresponding to channel Q), AK992 5.0-2 (corresponding to channel W), AK992 5.0-3 (corresponding to channel E);

1. Long press the FN+Q (or W or E) key combination for 3 seconds to pair, the Q key light (blue light) flashes quickly to enter the code pairing mode, the connection is successful, and the light returns to the normal light effect; ”

2. Short press the FN+Q/W/E key combination to switch the Bluetooth channel, the light of the paired Q/W/E key flashes slowly, the connection is successful, and the light returns to normal light effect;

2. 2.4G Mode Connection: FN+R

Long press FN+R to enter 2.4G strong code pairing, the R button light (green light) flashes quickly to enter the code pairing mode, and the light returns to the default state when the code is successfully paired. (It has been paired before leaving the factory, and the user does not need to pair the code)

3. Wired Mode Connection:

Toggle the switch to the “A” position, which is the wired mode.

4. Combination Key Function Description

FN+F1: Multimedia player FN+F5: Stop FN+F9: E-Mail	FN+F2: Volume down FN+F6: Previous song FN+F10: Browser	FN+F3: Volume up FN+F7: Play/Pause FN+F11: My Computer
--	---	--

FN+S: Windows system (factory default)

FN+A: MAC system

FN+X: Turn off the overall backlight (including the charging indicator light)


FN+Space bar: Press and hold for 3-5 seconds, the keyboard light flashes 3 times, clear the light effect and Bluetooth device

FN+Left WIN: Lock the function of the left window (Win lock light, the win key indicates that the white light is always on, indicating that it is locked, and it will return to normal after unlocking)


FN+BACK (Delete key): Press the FN+BACK combination key (supports 2.4G/Bluetooth mode), the backlight is off, and the lights of the number keys 1 to 0 show the percentage of power.

5. Instructions for Hot Plug Operation Steps


Hot-swappable: Different shafts can be replaced, and you can customize your unique typing experience. 3/5pin is compatible with most mechanical switches.

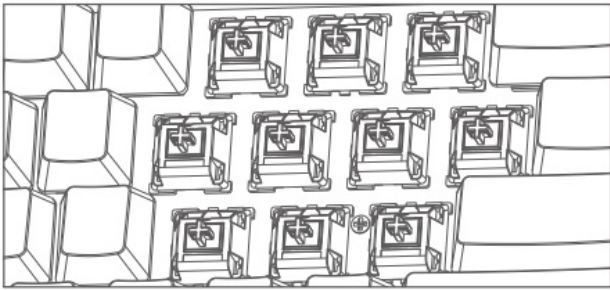


① Pull out the keycap with a key puller

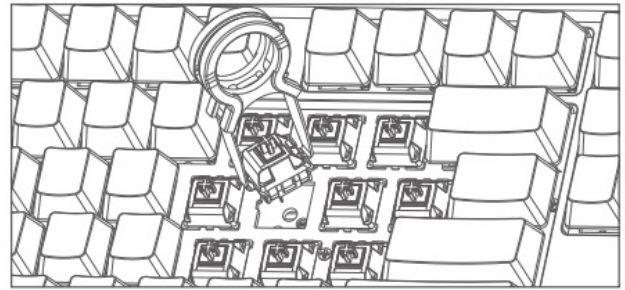

② Shaft puller to pull out the shaft

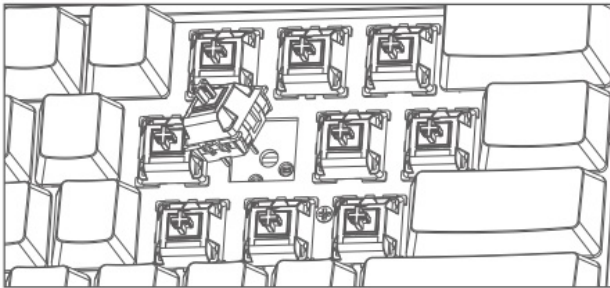

③ Calibrate pins and holes

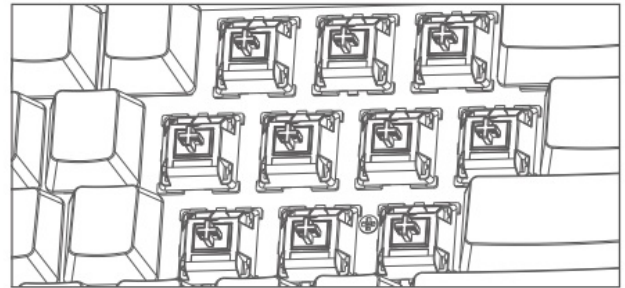

④ Vertically and lightly press the switch



http://weixin.qq.com/r/WnXF3XnEliTprT2_9yBI



Follow Douyin



Documents / Resources



[AJAZZ AK992 BT Three-Modes Mechanical Keyboard](#) [pdf] User Manual
AK992 BT Three-Modes Mechanical Keyboard, AK992, BT Three-Modes Mechanical Keyboard
, Mechanical Keyboard, Keyboard