



AJAZZ AM3 Series Tripe Mode Game Mouse User Manual

[Home](#) » [AJAZZ](#) » **AJAZZ AM3 Series Tripe Mode Game Mouse User Manual** 



A J A Z Z

**AM3 Series Tripe Mode Game Mouse
User Manual**

Contents

- [1 AM3 Series Tripe Mode Game Mouse](#)
- [2 Technical parameters](#)
- [3 Functional Description](#)
- [4 Mode connection instructions](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)

AM3 Series Tripe Mode Game Mouse


Thank you very much for choosing our AJAZZ AM3 magnesium-aluminum alloy gaming mouse. We hope it can bring you a brand new operating experience. To get more enhanced settings and functions, you can download the driver software from the official website.

Technical parameters

Product brand: AJAZZ
Product model: AM3
Transmission mode: USB wired+ 2.4G wireless+ BTS.O
Interface type: Type-C interface
Product size: 112.92×57.87×36.25mm
Product weight: <:::<47g
Case material: Magnesium-aluminum alloy

Number of buttons: 5 buttons+ 1 power switch+ 1 DPI/PR button
 Wire length: 1.8M
 DPI adjustment: 400-3200 (six-speed DPI driver adjustable)
 (Driver software can adjust the minimum 100 DPI, the maximum 30000 DPI,
 Drive DPI adjustment 50 DPI per step}
 Sensor: PAW3950
 Key life: 10000000 times
 Battery capacity: 350mAh
 Reply rate: Default wired USB: 1000Hz / Default 2.4G: 1000Hz /
 Default BT: 125Hz
 Driver software adjustable report rate:
 Wired report rate: 125Hz / 250Hz / 500Hz / 1000Hz
 2.4G report rate: 125Hz / 250Hz / 500Hz / 1000Hz
 BT report rate: Not adjustable
 Supported systems: Windows Vista/XP/7 /8/10/11, Mac

Functional Description

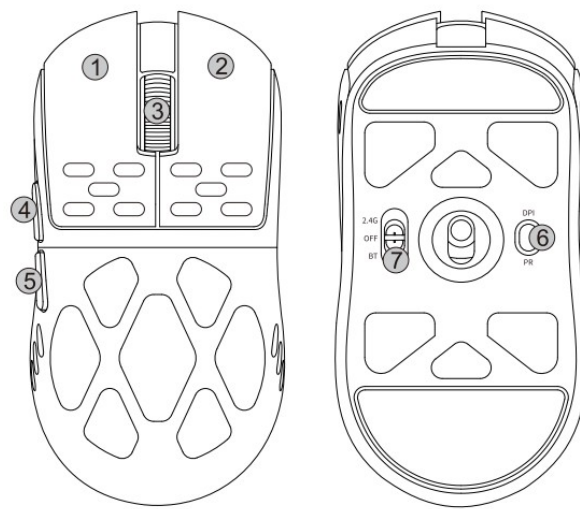

2.1.Button Description

1. Left Button
2. Right Button
3. Middle Button (Scroll Wheel Button)
4. Forward Button
5. Back Button
6. DPI/PR Switch Button
 - 1). DPI Switch Button (Short Press to Switch)
 - a. Six-speed DPI Button: Default DPI: 800 (Green). (You can customize the DPI value in the driver software
 DPI Indicator: 400 (Red)/ 800 (Green)/ 1200 (Blue)/ 1600 (Cyan)/ 2400 Yellow)/ 3200 (Purple})
 - b. DPI Lighting Effect: (Default: Off. (Single-color breathing and single-color constant light need to be adjusted through the driver software))
 Single-color breathing (color corresponds to DPI color) | Single-color constant light (color corresponds to DPI color) / Turn off the light
 - 2). BT PR pairing key (long press to pair)
 in BT mode, long press for 3-5 seconds to enter BT pairing state.
Note: only valid in BT mode)

7. Mode switch

- 1). 2.4G gear: dial up, that is, 2.4G mode.
- 2). OFF gear: middle to turn off the power.
- 3). BT gear: dial down, that is, BT mode.

Note: In any mode, insert the USB data cable, that is, wired mode, and charge the mouse.

2.2. Mouse indicator light description

2.4G mode pairing indicator light (green light)

1. Pairing indicator light flashes (green light): Entering 2.4G pairing state
2. Pairing successful: indicator light (green light) stays on for 3 seconds and then turns off

BT mode pairing indicator light (blue light)

1. Pairing indicator light flashes slowly (blue light): Entering BT reconnection state
2. Pairing indicator light flashes quickly (blue light): Entering BT pairing state
3. DPI indicator light
400 (red)/ 800 (green)/ 1200 (blue)/ 1600 (cyan)/ 2400 (yellow)/ 3200 (purple)
4. Low power indicator: The indicator light flashes (red light)
5. Charging indicator: The indicator light is always on (red light)

2.3. Low power mode

1. Low power state: the mouse indicator light flashes (red light).
2. Charging state: the mouse indicator light is always on (red light).
3. Full power state: the mouse indicator light is off.
4. Battery voltage is below 3.4V: the mouse indicator light flashes at 0.5Hz frequency (red light), prompting charging.
5. Battery voltage is below 3.2V-3.0V: the mouse automatically shuts down.

2.4. Sleep mode

1. Power saving sleep state: after the mouse stops moving for 10 seconds, the mouse enters the power saving sleep state, and the mouse can be awakened by moving/pressing a button.
2. Deep sleep state: after the mouse stops moving for 1 minute, the mouse enters the deep sleep state, and the mouse can be awakened by moving/ pressing a button. (Note: In BT mode, it enters deep sleep after 15 minutes, and the reconnection time is about 5s)

Note: The deep sleep time can be customized in the driver software.

Mode connection instructions

3.1. Wired mode:

Wired mode switching method: No matter in any mode, after inserting the TYPE-C cable, it will automatically switch to wired mode and start charging the mouse.

3.2. 2.4G wireless mode:

CD. 2.4G Switching Method: Flip the mode switch at the bottom of the mouse upwards to switch to 2.4G mode.

@. 2.4G pairing method:

- 1). In 2.4G mode, the mouse indicator light flashes (green light), indicating that the mouse needs to be re-paired with the 2.4G receiver.
- 2). After inserting the receiver, open the driver software, then click the device icon recognized by the driver software or press the space bar on the keyboard to enter the 2.4G pairing window, and then follow the prompts in the driver software pairing window to pair.
- 3). Press the space bar on the keyboard to enter pairing mode, then press the left button+ middle button+ right button of the mouse at the same time for 5 seconds, the mouse indicator light flashes quickly (green light), then move the mouse close to the receiver, pairing is successful, the mouse indicator light (green light) stays on for 3 seconds and then goes out.

3.3. BT mode:

1. BT device name: AM3
2. BT mode switching method: Push the mode switch at the bottom of the mouse down to enter BT mode.
3. In BT mode, press and hold the "DPI/PR" button at the bottom of the mouse for 5 seconds, the mouse indicator light flashes quickly (blue light), and enters BT pairing mode. After pairing is successful, the mouse indicator light

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions-

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

The device must not be co-located or operating in conjunction with any other antenna or transmitter.



Documents / Resources



[AJAZZ AM3 Series Tripe Mode Game Mouse](#) [pdf] User Manual
2AY3H-AM3MAX, 2AY3HAM3MAX, am3max, AM3 Series Tripe Mode Game Mouse, AM3 Series, Tripe Mode Game Mouse, Mode Game Mouse, Game Mouse, Mouse

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.