



AJAZZ K690T Bluetooth Three Mode Mechanical Keyboard User Manual

[Home](#) » [AJAZZ](#) » AJAZZ K690T Bluetooth Three Mode Mechanical Keyboard User Manual 

Contents

- [1 AJAZZ K690T Bluetooth Three Mode Mechanical Keyboard](#)
- [2 Product Parameters](#)
- [3 Combination Key Function](#)
- [4 Indicator Light Description](#)
- [5 Bluetooth Code Pairing and Device Switching](#)
- [6 Turn On/Off Function \(Three-Stage\)](#)
- [7 Power Saving Mode](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)




AJAZZ K690T Bluetooth Three Mode Mechanical Keyboard



Product Parameters

- **Product Brand:** AJAZZ
- **Product Model:** K690T
- **Battery Capacity:** 2000 mAh rechargeable lithium battery
- **Interface Type:** Type-c
- **Transmission Method:** USB wired + 2.4G+ Broadcom Bluetooth 5.0
- **Product Size:** 318X128X36.5mm +0.5
- **Product Weight:** 680g ± 1g
- **Wire:** 1.6M braided wire
- **Anti-Ghosting:** All key(69 key)
- **Backlight:** RGB lighting (18 lighting effects)
- **Key Layout:** Compact 69 key
- **Compatible System:** WindowsXP/Windows 7 / 8/10/MAC

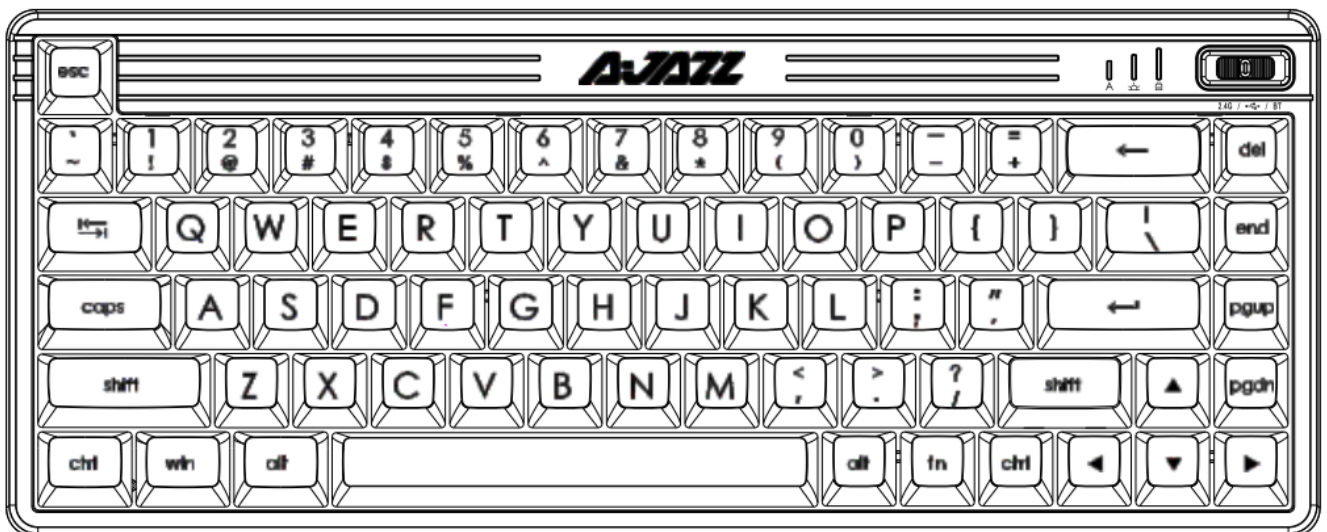

Combination Key Function

Combination Key	Realize the Function
FN+ESC	Reset: Long press the keyboard for 4s to restore factory settings, clear all settings
FN+LeftWIN	Lock key: Lock the left window function Backlight Increase: the light brightness is increased by 5 levels to
FN+ A	adjust (the indicator flashes when the highest level is

Combination Keys	Realize the Function
FN+ T	Backlight diminishing: light brightness diminishing 5 levels adjustment (the indicator flashes at the highest level)
FN+ ◀	Sing! light effect switch: RGB lighting effect is converted to mono romantic state, 7-color cycle adjustment
FN+ ▶	RGB lighting effect switch: convert a single color lighting effect to RGB
FN+> FN+< FN+]	Lighting effect direction adjustment: some lighting effects support Lighting effect direction adjustment: some lighting effects support Light effect speed increasing: light speed increasing 5 levels adjustment (the indicator flashes at the highest level)
FN+[Light effect speed decreasing: light speed decreasing 5 levels adjustment (the indicator flashes at the highest level)
FN+, I FN+DEL	18 kinds of cycle lighting effects (the keyboard supports 15 kinds, the driver supports 3 groups: custom/music rhythm/music rhythm 2 INSERT

FN+PGUP	Volume+
FN+PGDN	Volume-
FN+END	PRTSC
FN+Z	Default FPS mode: W/A/S/D/t / J, /+/-/→
FN+X	Default LOL mode: Q/W/E/R/D/G/F/B/N/L-Ctr/L-Alt/Tab/Space/ 1-6/Esc
FN+C	Default 36-key office mode: A-Z26 English letters/[]/;/'" 1./t / J/→
FN+TAB	Three game mode lighting effects for recording/saving, one color when recording, a total of 8 colors
FN+A	Apple key position mode: switch to special key position for Apple computer system
FN+S	Win key mode: switch to Windows system key (default)
FN+Left Ctrl	Digital zone and Ffunctional zone interchange: The default F key needs to be used i n combination with the FN key. After the combination is pressed, it needs to be used in combination with the FN key to switch to a number key.

Indicator Light Description

Indicator A: Case indicator.

Indicator:

The code matching/device switching indicator, the code matching flashes quickly, and the switching device flashes three times at medium speed; the red light of Bluetooth device 1 flash, the green light of Bluetooth device 2 flashes, and the blue light of Bluetooth device 3 flashes. Always on after a successful connection.

Indicator:

Charging indicator, always on when charging, and off when fully charged ESC key indicator light: when the battery

is low, the red light flashes quickly, the backlight is automatically turned off, and the flashing stops when the power is connected and the charging start.

Bluetooth Code Pairing and Device Switching

FN+Q:

Switch to device 1, the red indicator in the upper right corner flashes three times to indicate the switch; Press FN+Q for 2S to pair the code, the indicator light flashes red quickly, and the red light is steady after the connection is successful.

FN+W:

- Switch to device 2. The green indicator in the upper right corner flashes three times to indicate the switch.
- Press FN+W for 2S to pair the code, the green indicator light flashes quickly¹ and the green light is steady after the connection is successful.

FN+E:

Switch to device 3. The blue indicator in the upper right corner flashes three times to indicate the blue switch. Press FN+E for 2S to pair the code, the blue indicator light flashes quickly, and the blue light is always on after the connection is successful.

Turn On/Off Function (Three-Stage)

Left Gear 2.4G Mode:

(mandatory code pairing FN+R, mainly used for after-sales service) After the switch is successful, the backlight flashes twice in red as a whole to indicate the switch is successful

Intermediate Gear Wired Mode: the power needs to be turned off, and the backlight flashes green twice after the switch is successful, indicating that the switch is successful

Right Gear Bluetooth Mode:

After the switch is successful, the backlight flashes twice and the blue light indicates a successful switch. The middle indicator light is red after Bluetooth device 1 is connected, the indicator light is constant green after Bluetooth device 2 is connected, and the indicator light is constant blue after Bluetooth device 3 is connected.

Regardless of the current switch is in any mode, the battery can be charged by turning on the wired power supply.

Power Saving Mode

- The backlight turns off after 5 minutes of inactivity.
- Enter deep sleep after 20 minutes of inactivity.

Documents / Resources



[AJAZZ K690T Bluetooth Three Mode Mechanical Keyboard](#) [pdf] User Manual
K690T, Bluetooth Three Mode Mechanical Keyboard, K690T Bluetooth Three Mode Mechanical Keyboard, Three Mode Mechanical Keyboard, Mechanical Keyboard, Keyboard