



# AJAZZ K690T BT Three-Mode Mechanical Keyboard User Manual

[Home](#) » [AJAZZ](#) » AJAZZ K690T BT Three-Mode Mechanical Keyboard User Manual 

## AJAZZ<sup>®</sup> × NACODEX<sup>™</sup> K690T BT Three-Mode Mechanical Keyboard User Manual

### Contents

- [1 Product Parameters](#)
- [2 Combination Key Function](#)
- [3 Indicator Light Description](#)
- [4 Bluetooth Code Pairing and Device Switching](#)
- [5 Turn On/Off Function \(Three-Stage\)](#)
- [6 Power Saving Mode](#)
- [7 Documents / Resources](#)

### Product Parameters

**Product Brand:** AJAZZ

**Product Model:** K690T

**Battery Capacity:** 2000 mAh rechargeable lithium battery

**Interface Type:** Type-c

**Transmission Method:** USB wired + 2.4G+ Broadcom Bluetooth 5.0

**Product Size:** 318X128X36.5mm +0.5

**Product Weight:** 680g +10g


**Wire:** 1.6M braided wire

**Anti-Ghosting:** All key(69 key)

**Backlight:** RGB lighting (1 8 lighting effects)

**Key Layout:** Compact 69 key


**Compatible System:** WindowsXP/ Windows 7/ 8/10/MAC

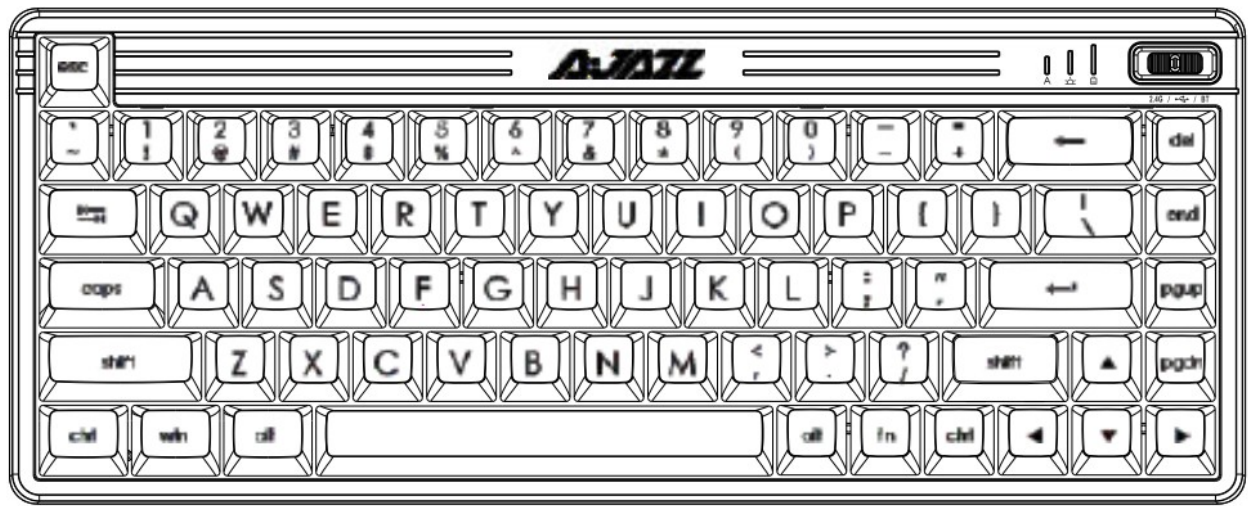


## Combination Key Function


Combination Key	Realize the Function
FN+ESC	Reset: Long press the keyboard for 4s to restore factory settings, clear an settings
FN+Left WIN	Lock key: Lock the left window function
FN+ ▲	Backlight Increase: the light brightness is increased by 5 levels to adjust (the indicator flashes when the highest level is)
FN+ ▼	Backlight diminishing: light brightness diminishing 5 levels adjustment (the indicator flashes at the highest level)
FN+ ◀	Singl light effect switch: RGB lighting effect is converted to monochromatic state, 7-color cycle adjustment
FN+ ▶	RGB lighting effect switch: convert a single color lighting effect to RGB
FN+>	Lighting effect direction adjustment: some lighting effects support
FN+<	Lighting effect direction adjustment: some lighting effects support
FN+ ⌋	Light effect speed increasing: light speed increasing 5 levels adjustment (the indicator flashes at the highest level)
FN+ ⌈	Light effect speed decreasing: light speed decreasing 5 levels adjustment (the indicator flashes at the highest level)
FN+,	18 kinds of cycle lighting effects (the keyboard supports 15 kinds, the driver supports 3 groups: custom/music rhythm/music rhythm 2)
FN+DEL	INSERT
FN+PGUP	Volume+
FN+PGDN	Volume-
FN+END	PRTSC
FN+Z	Default FPS mode: W/A/S/D/ T / 1 /←/→
FN+X	Default LOL mode: Q/W/E/R/D/G/F/B/N/L-Ctr/L-Alt/Tab/Space/ 1-6/Esc
FN+C	Default 36-key office mode: A-Z 26 English letters/[ ]/;"'1./ ↑ / ↓ /←/→
FN+TAB	Three game mode lighting effects for recording/saving, one color when recording, a total of 8 colors
FN+A	Apple key position mode: switch to special key position for Apple computer system
FN+S	Win key mode: switch to Windows system key (default)
FN+Left Ctrl	Digital zone and F functional zone interchange: The default F key needs to be used in combination with the FN key. After the combination is pressed, it needs to be used in combination with the FN key to switch to a number key.

## Indicator Light Description



Indicator **A**: Case indicator

Indicator  :The code matching/device switching indicator, the code matching flashes quickly, and the switching device flashes three times at medium speed;the red light of Bluetooth device 1 flashes, the green light of Bluetooth device 2 flashes, and the blue light of Bluetooth device 3 flashes. Always on after successful connection

Indicator  : Charging indicator, always on when charging, and off when fully charged ESC key indicator light: when the battery is low, the red light flashes quickly, the backlight is automatically turned off, and the flashing stops when the power is connected and the charging start


## Bluetooth Code Pairing and Device Switching

FN+Q: Switch to device 1, the red indicator in the upper right corner flashes three times to indicate the switch; Press FN+Q for 2S to pair the code, the indicator light flashes red quickly, and the red light is steady after the connection is successful.

FN+W: Switch to device 2. The green indicator in the upper right corner flashes three times to indicate the switch. Press FN+W for 2S to pair the code, the green indicator light flashes quickly, and the green light is steady after the connection is successful.

FN+E: Switch to device 3. The blue indicator in the upper right corner flashes three times to indicate the blue switch. Press FN+E for 2S to pair the code, the blue indicator light flashes quickly, and the blue light is always on after the connection is successful

## Turn On/Off Function (Three-Stage)

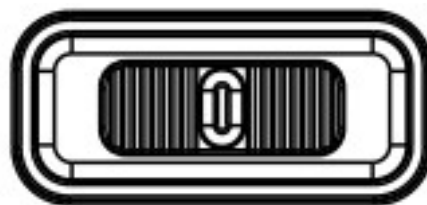

2.4G /  / BT

Left Gear 2.4G Mode: (mandatory code pairing FN+R, mainly used for after-sales service) After the switch is successful, the backlight flashes twice in red as a whole to indicate the switch is successful

Intermediate Gear Wired Mode: the power needs to be turned off, and the backlight flashes green twice after the switch is successful, indicating that the switch is successful

Right Gear Bluetooth Mode: After the switch is successful, the backlight flashes twice and the blue light indicates a successful switch. The middle indicator light is red after Bluetooth device 1 is connected, the indicator light is constant green after Bluetooth device 2 is connected, and the indicator light is constant blue after Bluetooth device 3 is connected . Regardless of the current switch is in any mode, the battery can be charged by turning on the wired power supply.

## Power Saving Mode

The backlight turns off after 5 minutes of inactivity


Enter deep sleep after 20 minutes of inactivity



[http://weixin.qq.com/r/WnXF3XnEliTprT2\\_9yBI](http://weixin.qq.com/r/WnXF3XnEliTprT2_9yBI)



## Documents / Resources

	<p><a href="#">AJAZZ K690T BT Three-Mode Mechanical Keyboard</a> [pdf] User Manual K690T BT Three-Mode Mechanical Keyboard, K690T, BT Three-Mode Mechanical Keyboard, Mechanical Keyboard, Keyboard</p>
---	---

[Manuals+](#).