



AKKO 3068 Beken Multi-Modes Mechanical Keyboard User Manual

[Home](#) » [AKKO](#) » AKKO 3068 Beken Multi-Modes Mechanical Keyboard User Manual 



3068 Beken Multi-Modes Mechanical Keyboard User Manual

Contents

- [1 FCC STATEMENT](#)
- [2 3068B Technical Specifications](#)
- [3 Documents / Resources](#)
 - [3.1 References](#)
- [4 Related Posts](#)

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


RF WARNING STATEMENT

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction.

3068B Technical Specifications

Dimensions	Weight	Country of Origin	Type
Approximately 306*197*39mm	Approximately 0.64kg	China	Mechanical Keyboard
Keycap	Connection	Interface	Battery Capacity
PBT Material	Bluetooth/USB/2.4Ghz	Type-C To USB	1800mAh
Multimedia Keys	N-Key Rollover	Key/Lighting Effects Customization	
YES	YES	The keyboard can only be customized with driver in wired mode	

3068B HotKeys

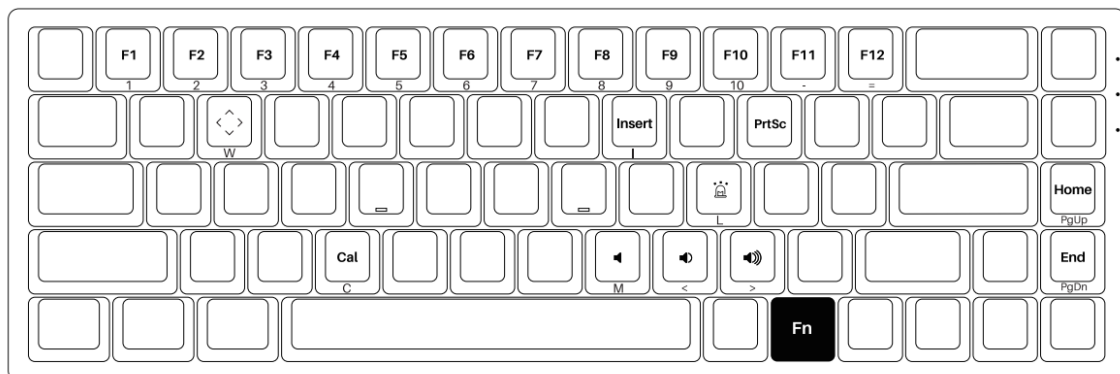


Fn+	1 - 0	=	F1 - F10
	-		F11
	=		F12
	PgUp		Home
	PgDn		End

Fn+	I	=	Insert
	P		Prts
	C		Calculator
	M		Mute
	<		Decrease Volume


Fn+	>		Increase Volume
	w	=	Swap W A S D with ↑ ↓ ← →

3068B System Commands(Windows)

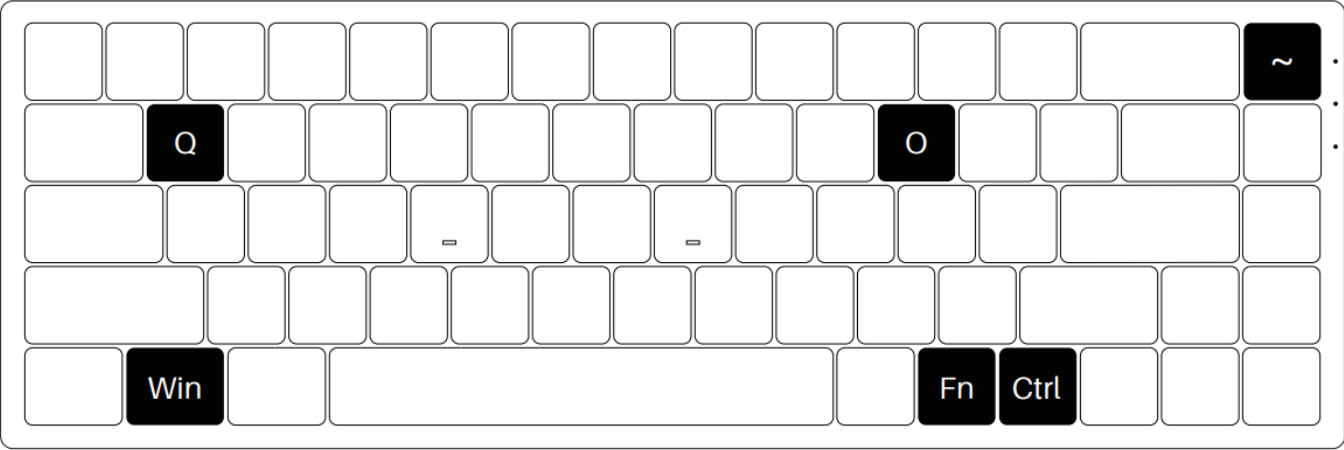


Lock Windows Key	Press Fn and left Win key
Restore Factory Settings	Hold down Fn and press key for 3S
Revert Ctrl into Menu (APP) key	Hold down Fn and press right Ctrl for 3S
Enter Windows system	Hold down Fn and press the Q key for 3S
Enter Mac system	Hold down Fn and press the O key for 3S

3068B System Commands(Mac)

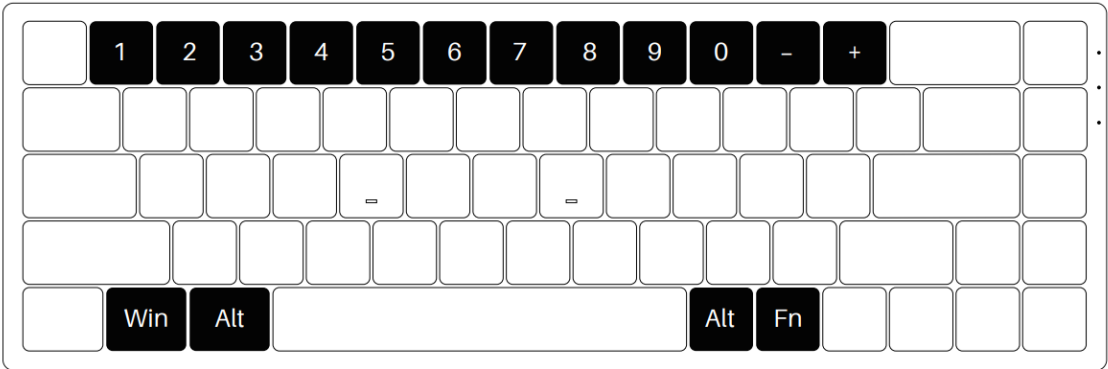

1	Decrease display brightness	5	F5	9	Skip forward (audio)	Right Alt	Command
2	Increases display brightness	6	F6	10	Mute	Left Win	Option
3	Open mission control	7	Skip back (Audio)	-	Volume down	Left Alt	Command
4	Activate Siri	8	Pause/Play (Audio)	+	Volume up		


Note: The following features are realized by the combination of “Fn + corresponding key”
3068B Backlight Settings

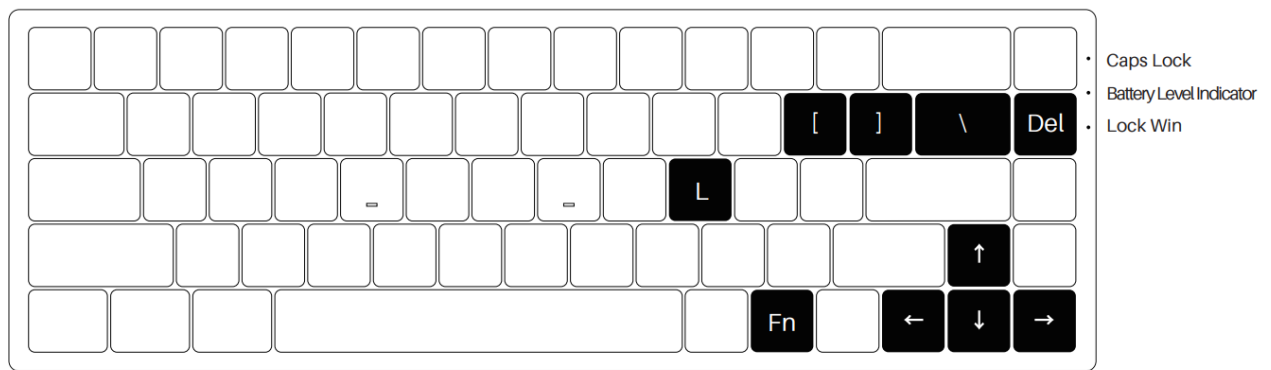

Fn+	\	=	In all lighting effects with RGB color mode, set the backlight color to 7 single color with RGB loop effect.
	Del		Constant \ Breath \ Neon \ Wave \ Ripple \ Star \ Effect A \ Effect B \ Effect C \ Effect D \ Effect E \ Effect F \ Effect G \ Effect H \ Effect I \ Effect J \ Effect K \ Effect L \ Effect M \ Effect N (20 Lighting Effects)
	L		Light On / Off

Fn+	[=	Slower Animation
]		Faster Animation
	“↑”		Bright
	“↓”		Dim
	“←”		Set animation direction to left
	“→”		Set animation direction to Right

3068B Bluetooth Feature Overview

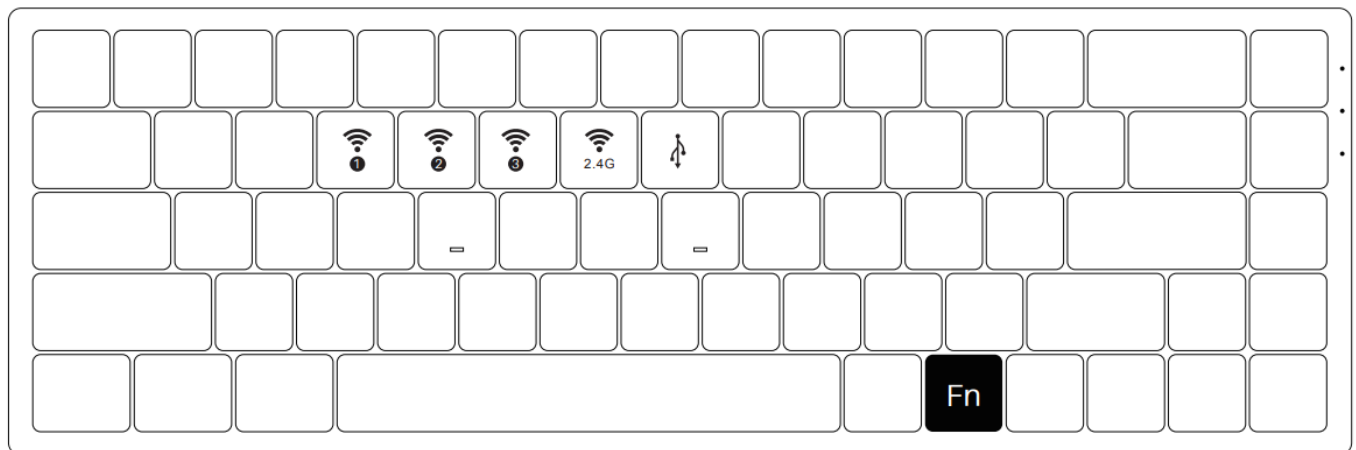

Fn+	E	=	Bluetooth device 1	Short press to connect with slow flashing blue LED; Press and hold to pair device with fast flashing blue LED.
	R		Bluetooth device 2	
	T		Bluetooth device 3	
	Y		2.4G wireless device	Short press to connect with slow flashing green LED; The lighting effect will be restored when pairing succeeds.
	U		Wired mode	

3068B Bluetooth Setup Instruction 1 Switch to Bluetooth mode

1. When the keyboard remains unplugged, turn the back switch to ON. Then long press and hold Fn + E / R / T to start pairing with Bluetooth devices. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.
2. When the Keyboard is plugged into the computer through a USB interface, it will enter Bluetooth mode automatically without having to push the switch on the back. Users can directly long press and hold Fn + E / R / T to enable Bluetooth pairing. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R

/ T keys flash quickly.

2. Set the Bluetooth profile

To help users recognize individual Bluetooth devices, the keyboard is equipped with both Bluetooth 5.0 and 3.0 frameworks. The device name under the Bluetooth 5.0 framework is Akko 3068BT-1 / Akko 3068BT-2 / Akko 3068BT-3 while the device name under Bluetooth 3.0 is AKK0 3068 BT3.0. Once the devices are paired through Fn + E/R/T, the system will by default memorize the last connected device before you turn off the Bluetooth mode.

3068B Bluetooth Setup Instruction 2

3. Bluetooth Pairing

The keyboard can be paired with PC, Pad, smartphone and other devices with Bluetooth turned on. When you first try to search Bluetooth

devices, two groups of device names shall appear with Akko 3098 BT3.0 (Bluetooth 3.0) and Akko 3098-1 (Bluetooth 5.0). Select a

Bluetooth group based on your preferences (Note: some devices can only search for the Bluetooth 5.0 group).

4. Switch the Bluetooth device

After 4 Bluetooth devices have been paired with the keyboard, press Fn+E / Fn+R / Fn+T / Fn+Y for at least 3 seconds to quickly switch between them.

5. Shut off the keyboard

Turn the power off on the keyboard back panel while unused for power saving;

If the keyboard remains unused for over 10 mins, it would go to sleep mode and you can activate it by pressing any key.

Note: The battery saver mode for Windows system would affect/delay the sleep activation time of the keyboard.

6. Reset the keyboard

If you forgot the specific paired front-end device or if there remains disorder in Bluetooth connection and communication, you'll need to clear the computer's Bluetooth cache by removing the 3068 keyboard from the list of connected device.

Key/Lighting Effects Customization Instruction

1. The key/lighting effects customization must be completed in wired mode with Akko driver.
2. In wired mode, the lighting effects can also achieve music rhythm effects with Akko driver.
3. Please download the Akko Cloud driver on our website.
4. Users can download the driver via en.akkogear.com

Akko Warranty and Service Statement

1. Akko provides 1-yr warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Disassembling the keyboard without manufacturer/seller's instruction will immediately void the warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.


Precautions Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.



www.akkogear.com



<http://weixin.qq.com/r/aDtOVoxE6tiVrcE19256>

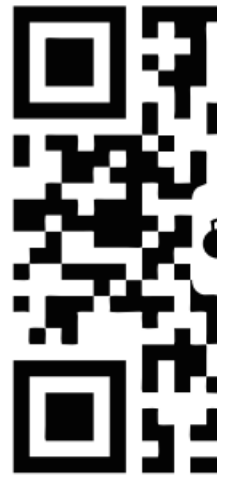

<http://qr.weibo.cn/g/49ss>



[instagram.com/akkogear](https://www.instagram.com/akkogear)



[facebook.com/akkogear](https://www.facebook.com/akkogear)

Documents / Resources



[AKKO 3068 Beken Multi-Modes Mechanical Keyboard](#) [pdf] User Manual

3068B, 2A4K8-3068B, 2A4K83068B, 3068 Beken Multi-Modes Mechanical Keyboard, Beken Multi-Modes Mechanical Keyboard

References

- [Akko 3068 Beken Multi-Modes Mechanical Keyboard \[pdf\] User Manual](#)
- [Akko | Designer for Mechanical Keyboards](#)
- [Akko \(@akkogear\) • Instagram photos and videos](#)
- [Akko 3068 Beken Multi-Modes Mechanical Keyboard \[pdf\] User Manual](#)