



AKKO 3098 Macro V1.0 Gaming Keyboard User Manual

[Home](#) » [AKKO](#) » AKKO 3098 Macro V1.0 Gaming Keyboard User Manual 

Contents

- [1 AKKO 3098 Macro V1.0 Gaming Keyboard](#)
- [2 3098 Technical Specifications](#)
- [3 3098 HotKeys](#)
- [4 3098 System Commands](#)
- [5 3098S Single-Color Backlight](#)
- [6 3098S Custom Backlight](#)
- [7 Akko Macro V1.0](#)
 - [7.1 Macro Setup Instruction 1](#)
 - [7.2 Macro Setup Instruction 2](#)
 - [7.3 Macro Setup Instruction 3](#)
- [8 Akko Macro V1.0 Calling Macros](#)
- [9 Akko Warranty and Service Statement](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)




AKKO 3098 Macro V1.0 Gaming Keyboard



3098 Technical Specifications

Dimensions	382 x 134 x 40mm
Weight	Approximately 1.05KG
Country of Origin	China
Type	Mechanical Keyboard
Keycap	PBT Material
Interface	Type-C To USB
Multimedia Keys	YES
N-Key Rollover	YES
Custom Keys	YES (use Akko Marco V1.0)

3098 HotKeys

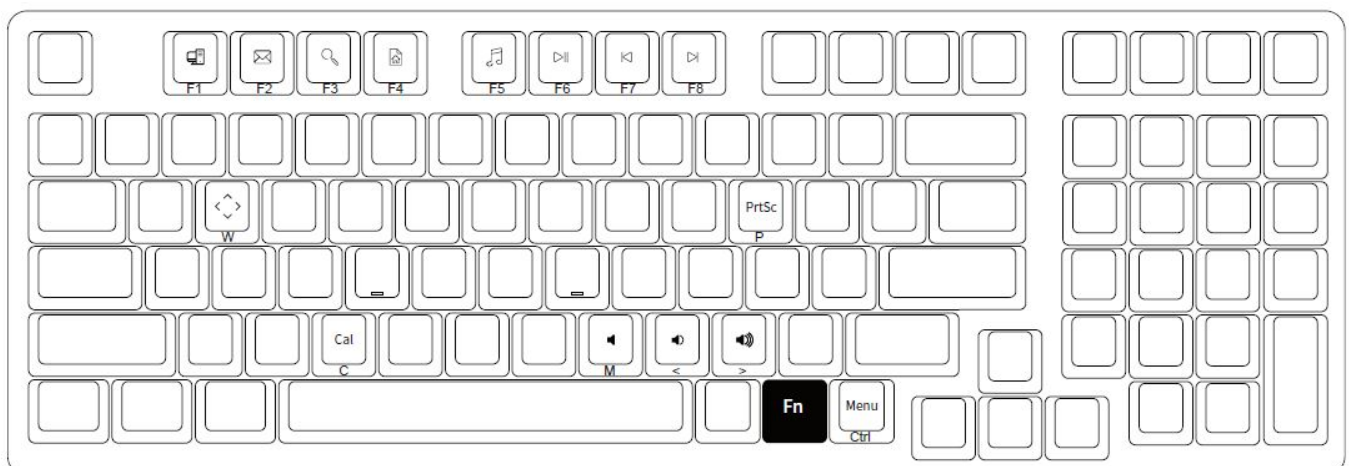


Fn+	F1		File Explorer
	F2		E-mail
	F3	=	Windows Search
	F4		Browser Homepage
	F5		Media

Fn+	F6		Pause/Playback
	F7		Previous Song
	F8	=	Next Song
	P		Print Screen
	C		Calculator

Fn+	M		Mute
	<		Decrease Volume
	>	=	Increase Volume
	W		Swvitahp ↑W↓A ←S →D

Hold down FN and press right Ctrl Revert Ctrl into Menu (APP) key


3098 System Commands

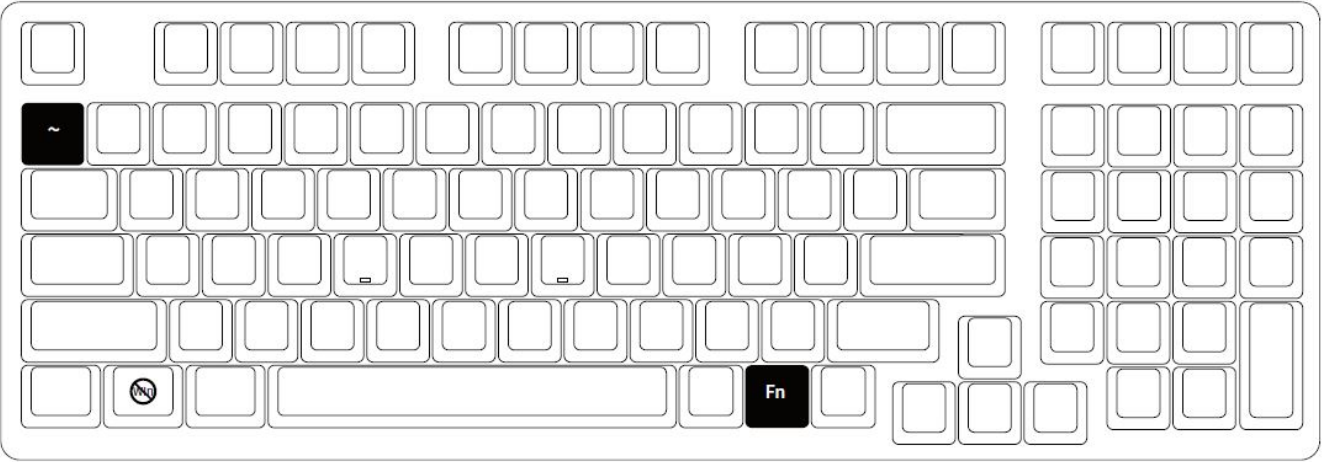

Lock Windows Key Press Fn and left Win key
Restore Factory Settings Hold down Fn and press key

3098S Single-Color Backlight


Backlight function is only available on the backlight version of 3098s.

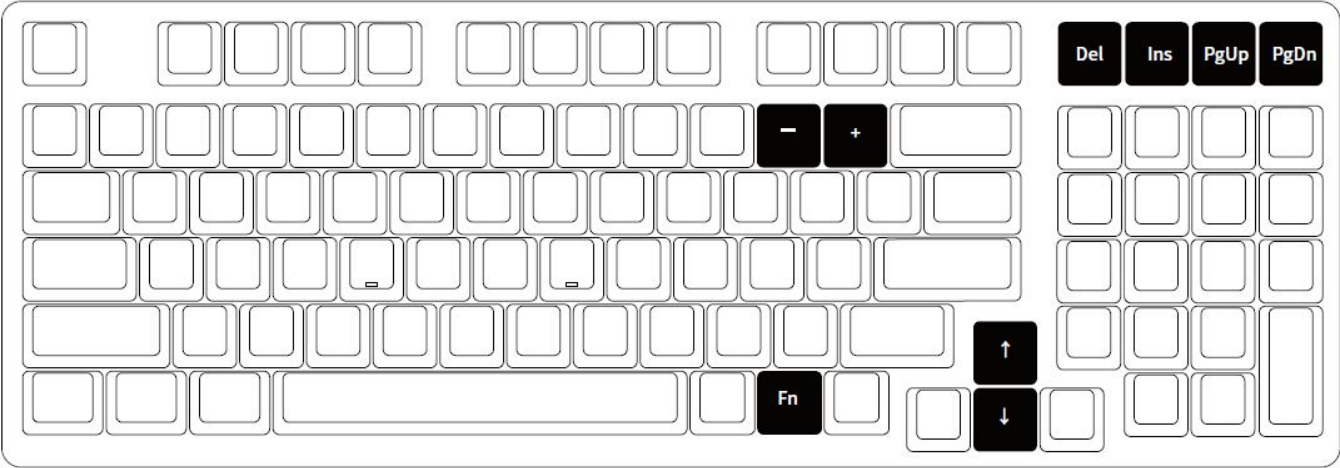

Fn+	Del Ins		Lighting Effect 1 Lighting Effect 2
	PgUp	=	Lighting Effect 3
	PgDn		Lighting Effect 4

Fn+	“↑”		Bright Dim	<p>The adjustments on the left is for generic lighting effects. Some lighting effects cannot be tweaked.</p> <p>For example, effects with constant light can only adjust brightness as they don't have animation speed and direction.</p>
	“-”		Slower Animation	
	“+”		Faster Animation	

3098S Custom Backlight

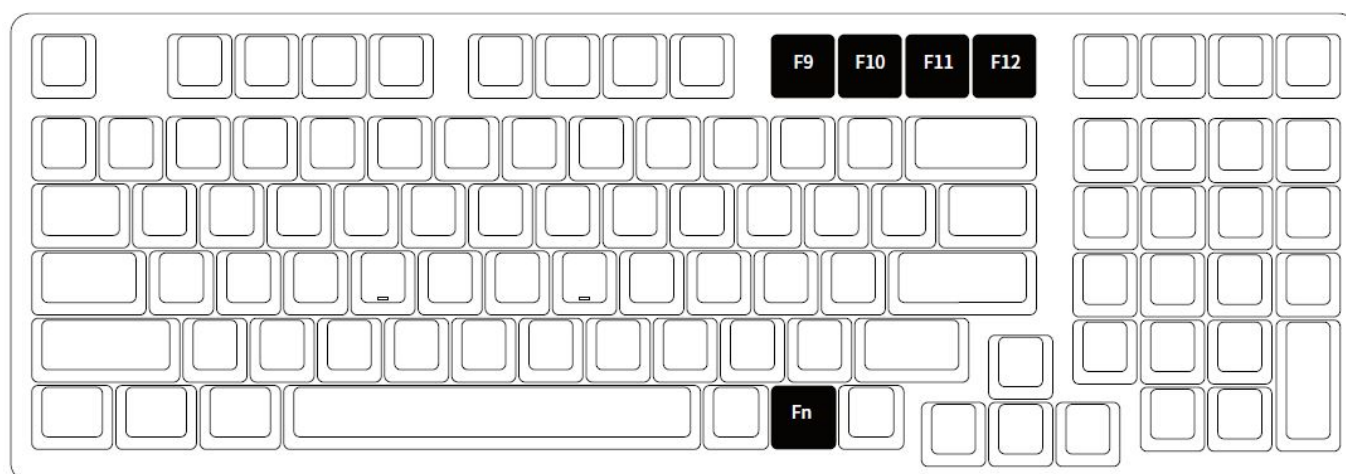

1. The keyboard provides 4 groups of Fn + (F9 ~ F12) customizable lighting effects.
The system has 4 groups of default pre-loaded lighting effects that can be triggered.
2. Press Fn + (F9 ~ F12) to trigger custom lighting effects.
3. Edit custom lighting effects:
 1. Press Fn + (F9 ~ F12) to enter the custom lighting mode.
 2. Press Fn + (F9 ~ F12) again to start editing. Press to specify the desired illuminated keys for the specific lighting effect group.
 3. Continue to press Fn + (F9 ~ F12) to save the changes.


Akko Macro V1.0

Macro Setup Instruction 1

1. Akko Macro V1.0 is hardware-based and works without software-driven.
2. The following keys cannot be programmed: “Esc”, “Fn” and “Left Win”.
3. Press and hold Fn + Win for 3 seconds to switch to the Macro mode. When the keyboard is re-connected or the system is restarted, the Macro mode will be exited. You need to switch to the Macro mode again to use programmed keys.
4. Akko Macro V1.0 does not support simultaneous trigger, that is, pressing “AB” at the same time will trigger the two keys in the order of A followed by B.
5. Akko Macro V1.0 does not support customized interval time, that is, the trigger interval between key A and key

B cannot be defined and will follow the system's default trigger time.

Macro Setup Instruction 2

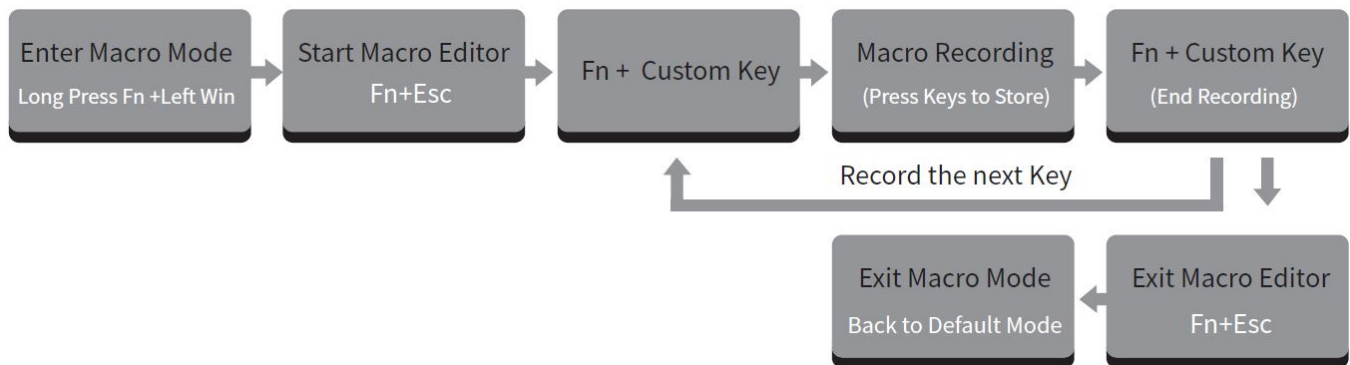

Clear Macro

If a key has been defined, after entering the Macro editor, you can press“ FN + the key” to clear its definition. If you want to re-customize that key, press“ FN + the key”again to start the new Macro recording after clearing its old definition.

Macro Setup Instruction 3

Macro Recording Example: Define“ A” as“ AKKOGEAR”

1. Press Fn + left Win for 3 seconds to enter the Macro mode.
2. Press Fn + ESC to launch Macro editor.
3. Press Fn + A. This means we choose key“ A” to record.
4. Press A, K, K, O, G, E, A, R in order as replacement definition of“ A”.
5. Press Fn + A again to end the Macro recording of key“ A”.

At this point, pressing“ A” in notepad will display“ AKKOGEAR”.

If you want to create a Macro for key“ B”, press Fn + B to start the Macro recording.

6. Press Fn + Esc to exit Macro editor.

Under the Macro mode, you can configure the keys and Macros you set.

7. Press and hold Fn + Left Win for 3 seconds to exit the Macro mode and return to the default key definition.

Akko Macro V1.0 Calling Macros

Method A:

Enter the Macro mode by long pressing Fn+left Win. Then all keys will turn to pre-configured definitions with locked Win key. Press Fn+Win to unlock Win key if necessary. In the Macro mode, you can use keys with customized definitions.

Note, everytime you reboot or re-plugged the cable of the keyboard, the Macro mode will be turned off by default and all keys will return to default definitions until you re-enter the Macro mode.

Method B:

Under the default key definition, you can also quickly call the customized content of specific keys through “Fn+right Alt+the key that has been defined through Macro”. Note that you must first press Fn and then press Alt to call the Macro.


Akko Warranty and Service Statement

1. Akko provides 1-yr warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Disassembling the keyboard without manufacturer/seller's instruction will immediately void the warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Precautions Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.

www.akkogear.com

Documents / Resources

	AKKO 3098 Macro V1.0 Gaming Keyboard [pdf] User Manual 3098 Macro V1.0 Gaming Keyboard, 3098, Macro V1.0 Gaming Keyboard
--	---

References

- [Akko® 3098 Macro V1.0 Gaming Keyboard | 3098 Macro V1.0 Gaming Keyboard, 3098, Macro V1.0 Gaming Keyboard](#)