Manuals+ — User Manuals Simplified.

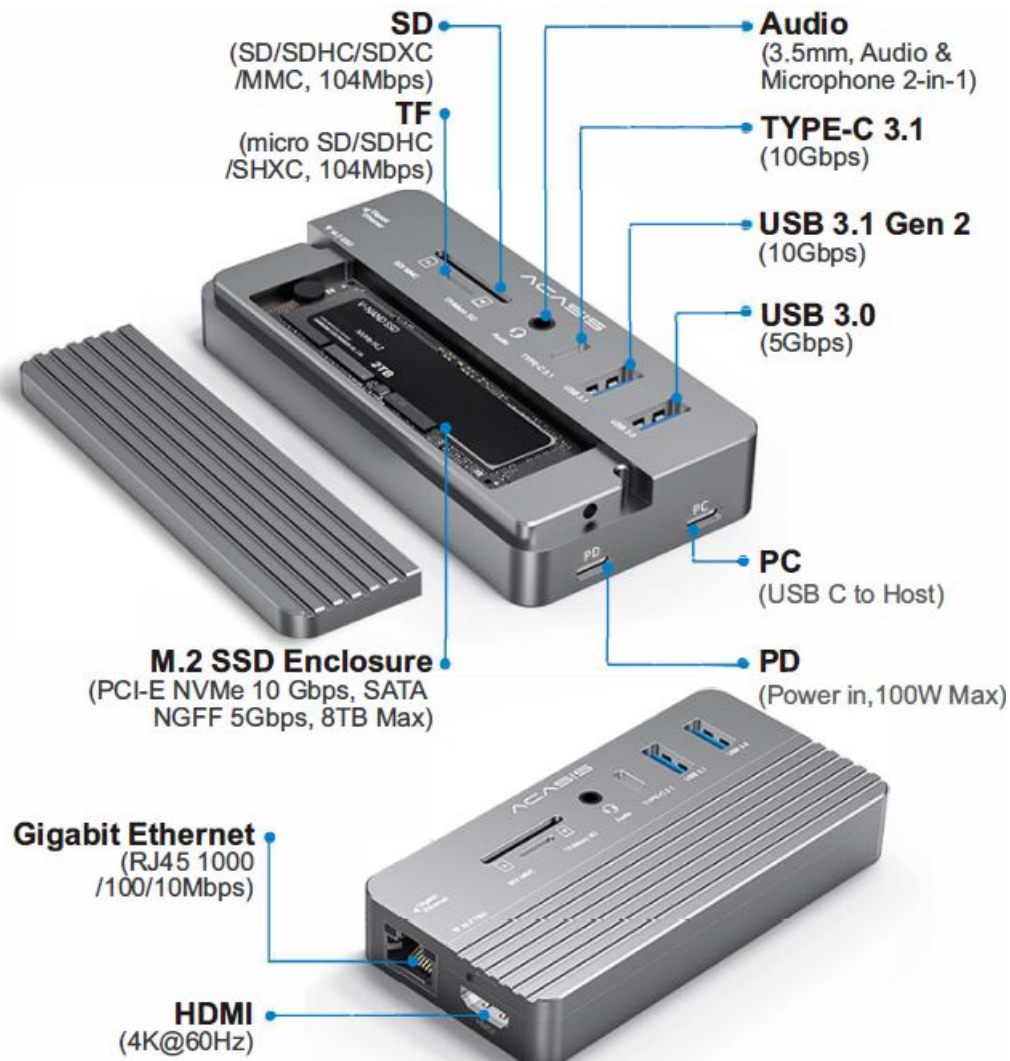# ACASIS CM073 10-In-1 USB-C Hub with SSD Enclosure User Manual

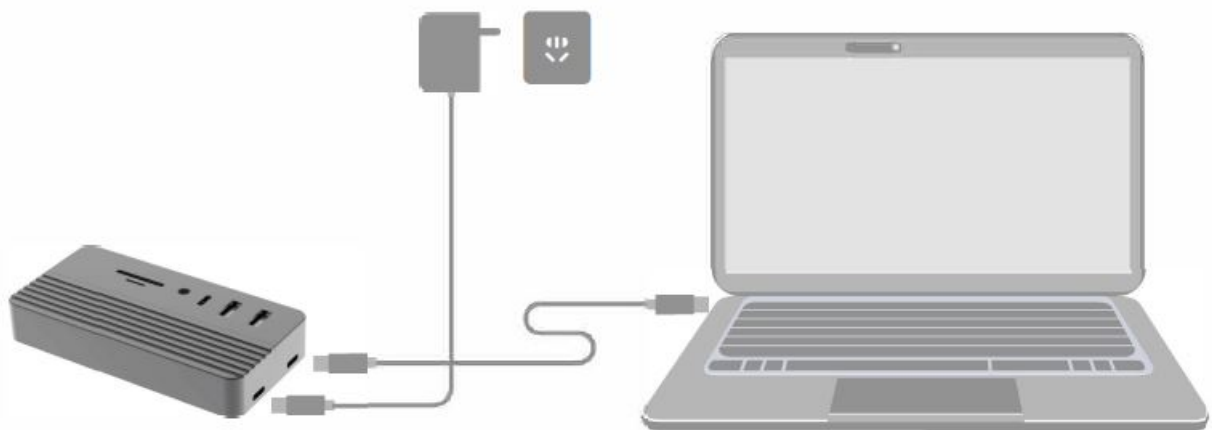**ACASIS CM073 10-In-1 USB-C Hub with SSD Enclosure**

Package Contents

- 1 0-in-1 Hub x1
- USB-C to C Cablex1
- Silicon Casex1
- Thermal Padx1
- Rubber Grommet x2
- User Manual x1

Product Introduction

SD
(SD/SDHC/SDXC
/MMC, 104Mbps)

TF
(micro SD/SDHC
/SHXC, 104Mbps)

Audio
(3.5mm, Audio &
Microphone 2-in-1)

TYPE-C 3.1
(10Gbps)

USB 3.1 Gen 2
(10Gbps)

USB 3.0
(5Gbps)

M.2 SSD Enclosure
(PCI-E NVMe 10 Gbps, SATA
NGFF 5Gbps, 8TB Max)

PC
(USB C to Host)

PD
(Power in,100W Max)

Gigabit Ethernet
(RJ45 1000
/100/10Mbps)

HDMI
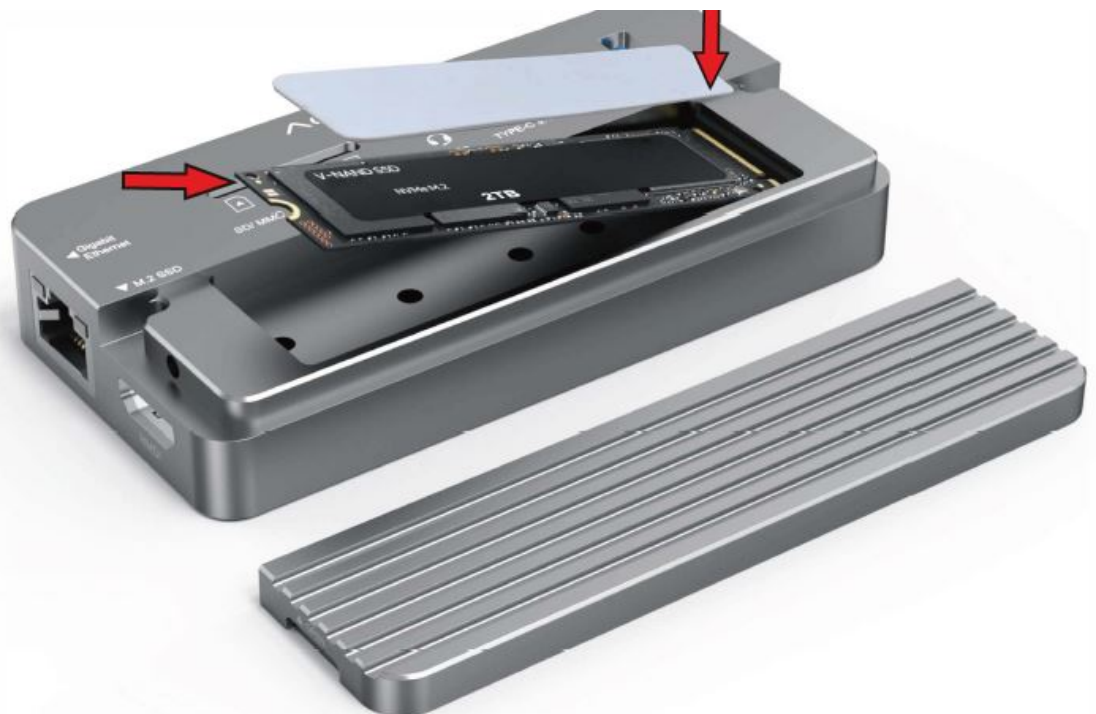(4K@60Hz)

Connection Instruction

Connect PC port of hub to your PC with the accessary USB C to C data cable. Using large power consumption devices with hub, please plug a power adapter to PD port (60W-1 00W), otherwise the hub may work unstablly or does not work. For HDMI function, please ensure your laptop USB-C 3.1 Gen 2/USB-C 3.2/Thunderbolt 3 port supports DisplayPort Alt Mode.

M.2 SSD Installation Instruction

1. Detach the lid of SSD enclosure through the groove.

2. Stick the thermal pad onto the top of your SSD. At a 45° angle, slide in your SSD untill it is fully seated align with the edge.3
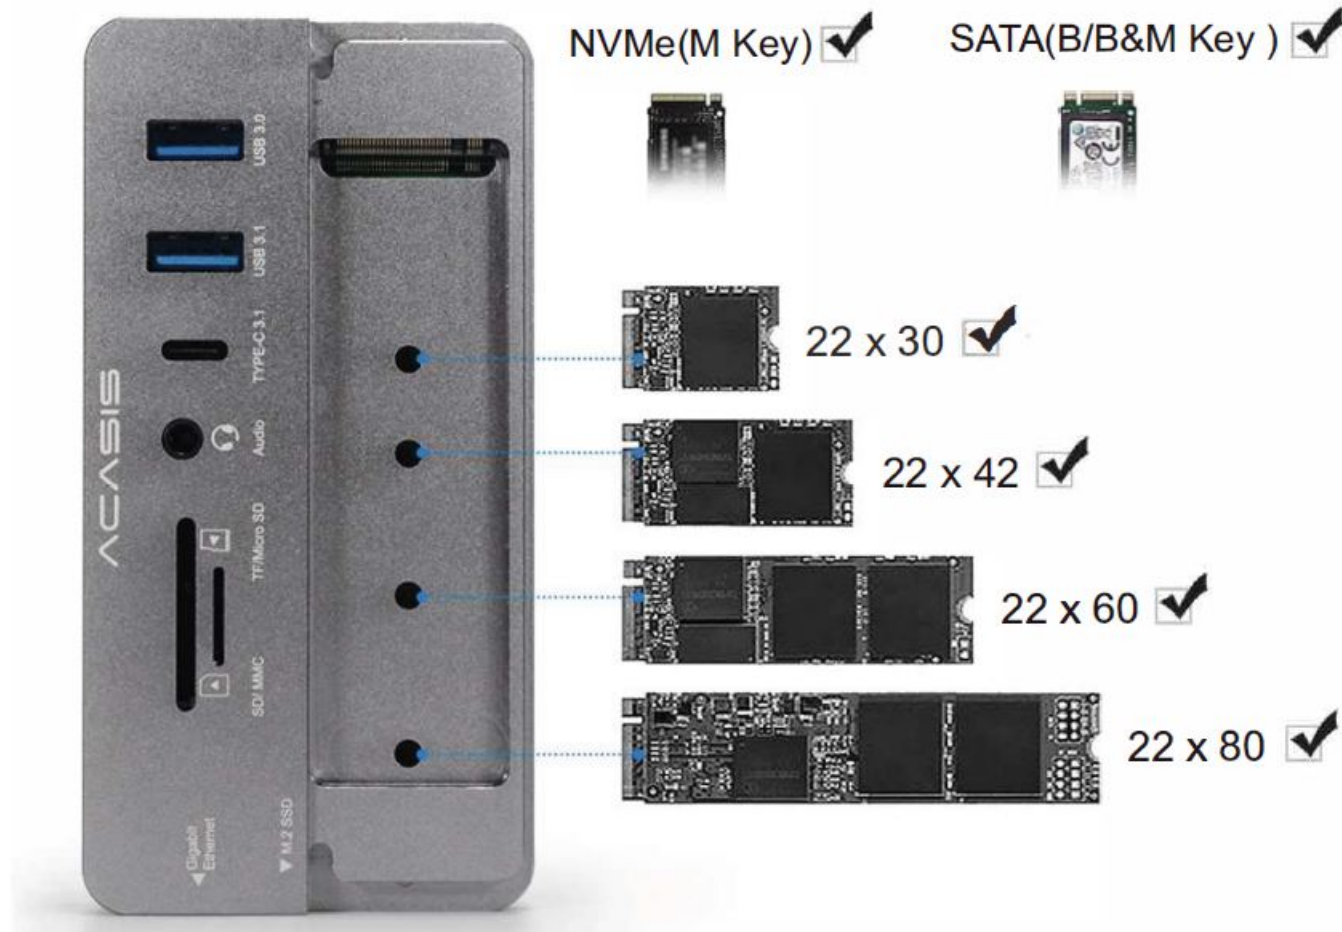
3. Fix SSD with the rubber grommet.

4. Reattach the lid of SSD enclosure.

Supported SSDs

NVMe(M Key) ✔   SATA(B/B&M Key) ✔

22 x 30 ✔
22 x 42 ✔
22 x 60 ✔
22 x 80 ✔

Product Specification

- Product Name: 10-in-1 USB C Hub with SSD Enclosure
- Model NO.: CM073
- Host Interface: Type-C
- Material: Aluminum Alloy
- Product Dimension: 113*56*19mm(4.4*2.2*0. 7in)
- Weight: 145g(5.1 oz)
- Supported SSDs: NVMe(M Key) , SAT A(B / B&M Key) Size: 22*30/22*42/22*60/22*80mm
- Supported Systems: Windows10, Linux, Mac OS 10.3 or higher

Documents / Resources

ACASIS CM073 10-In-1 USB-C Hub with SSD Enclosure [pdf] User Manual
CM073, 10-In-1 USB-C Hub with SSD Enclosure, CM073 10-In-1 USB-C Hub with SSD Enclosure