



AKKO 5075 B Plus Multi-Host Mechanical Keyboard User Manual

[Home](#) » [AKKO](#) » AKKO 5075 B Plus Multi-Host Mechanical Keyboard User Manual 

Contents

- [1 AKKO 5075 B Plus Multi-Host Mechanical Keyboard](#)
- [2 FCC STATEMENT](#)
- [3 Technical Specifications](#)
- [4 HotKeys](#)
- [5 System Commands \(Windows\)](#)
- [6 System Commands\(Mac\)](#)
- [7 Backlight Settings](#)
- [8 Bluetooth Feature Overview](#)
- [9 Bluetooth Setup Instruction](#)
- [10 Key/Lighting Effects Customization Instruction](#)
- [11 Akko Warranty and Service Statement](#)
- [12 Documents / Resources](#)
- [13 Related Posts](#)



AKKO 5075 B Plus Multi-Host Mechanical Keyboard



FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected .
- Consult the dealer or an experienced radio/TV technician for help.


RF WARNING STATEMENT

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Technical Specifications



<div>Dimensions</div> <div>Approximately 335*146*42mm</div>	<div>Weight</div> <div>Approximately 0.88kg</div>	<div>Country of Origin</div> <div>China</div>	<div>Type</div> <div>Mechanical Keyboard</div>
<div>Keycap</div> <div>PBT Material</div>	<div>Connection</div> <div>Bluetooth/USB/2.4Ghz</div>	<div>Interface</div> <div>Type-C To USB</div>	<div>Battery Capacity</div> <div>2500mAh</div>
<div>Multimedia Keys</div> <div>YES</div>	<div>N-Key Rollover</div> <div>YES</div>	<div>Key/Lighting Effects Customization</div> <div>The keyboard can be customized with Akko Cloud Driver in either 2.4G or wired mode.</div>	

HotKeys

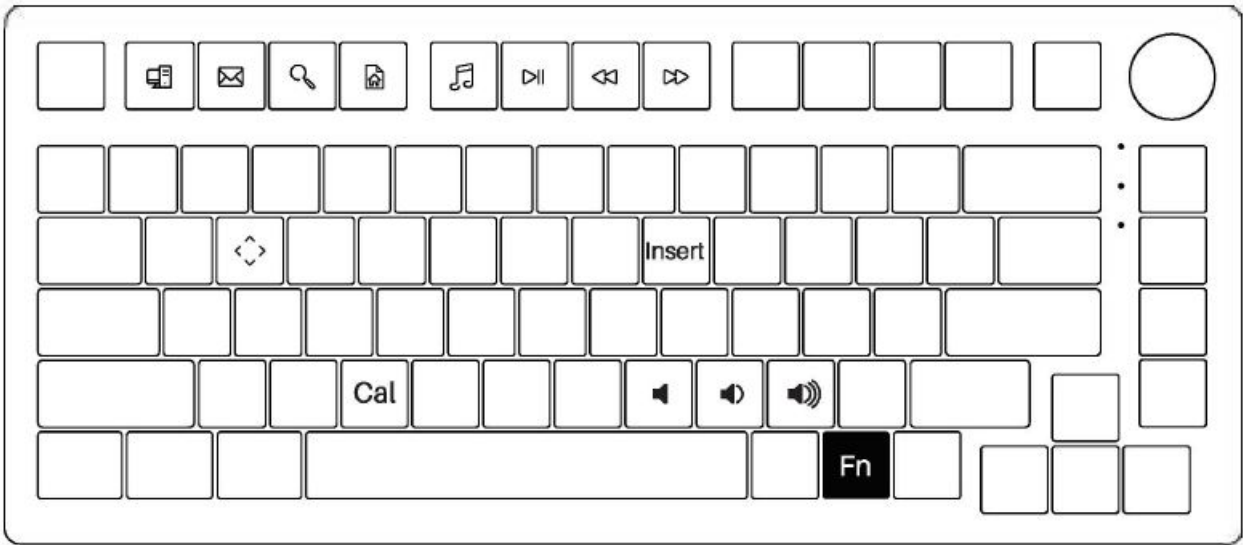

Fn+	F1	=	File Explorer
	F2		E-mail
	F3		Windows Search
	F4		Browser Homepage
	F5		Media
Fn+	F6	=	Pause /Playback
	F7		Previous Song
	F8		Next Song
	I		Insert
	C		Calculator
Fn+	M	=	Mute
	<		Decrease Volume
	>		Increase Volume
	W		Swap W A S D with ↑ ↓ ← →

System Commands (Windows)

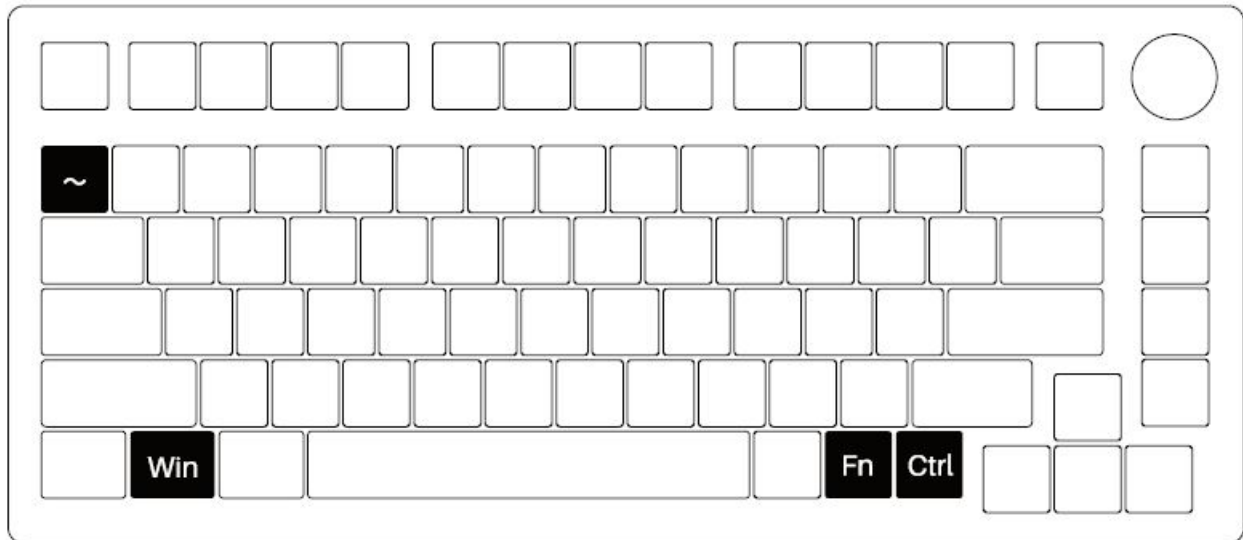


Adjust volume / light brightness

Lock Windows Key Press Fn and left Win key

Restore Factory Settings Hold down Fn and press ~ key for 5S

Revert Ctrl into Menu (APP) key Hold down Fn and press right Ctrl for 3S

System Commands(Mac)

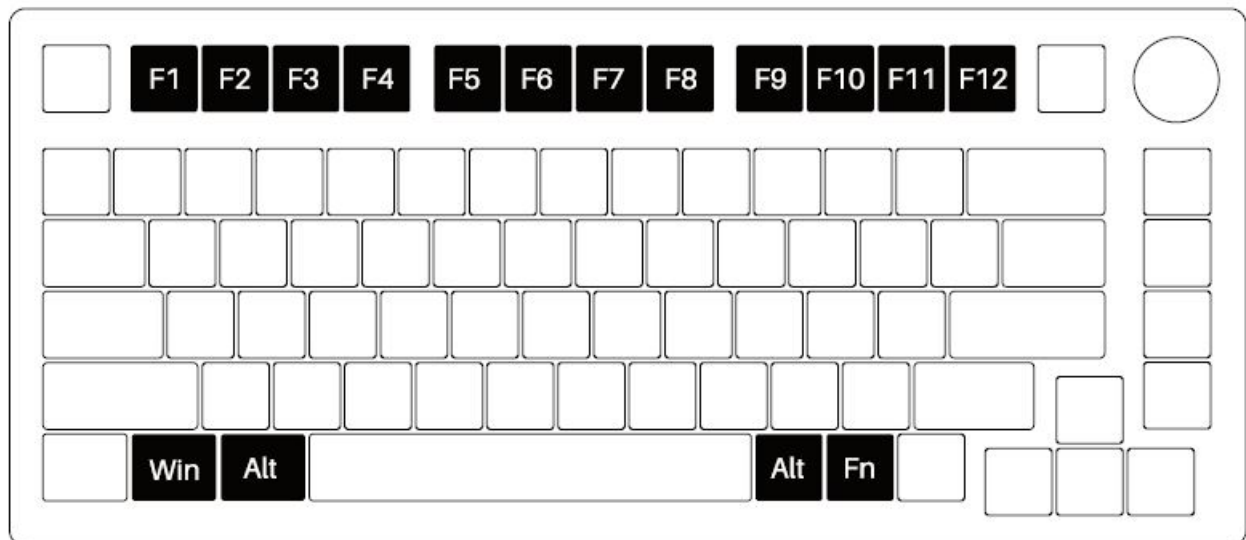

- **F1** Decrease display brightness
- **F2** Increases display brightness
- **F3** Open mission control
- **F4** Activate Siri
- **F7** Skip back (Audio)
- **F8** Pause/Play (Audio)

- **F9** Skip forward (audio)
- **F10** Mute
- **F11** Volume down
- **F12** Volume up
- Left Win Option
- Left Alt Command
- Right Alt Command

Backlight Settings


Caps Lock
 Battery Level Indicator
 Lock Win

Fn+	Home	=	Effect 1、Effect 2、Effect 3、Effect 4、Effect 5
	PgUp		Effect 6、Effect 7、Effect 8、Effect 9、Effect 10
	PgDn		Effect 11、Effect 12、Effect 13、Effect 14、Effect 15
	End		Effect 16、Effect 17、Effect 18、Effect 19、Effect 20
	L		Light On / Off
	\		In all lighting effects with RGB color mode, this shortcut allows you to set the backlight color to 7 single color with RGB loop effect.


Fn+	"↑"	=	Bright
	"↓"		Dim
	"←"		Set animation direction to left
	"→"		Set animation direction to Right
	"_"		Slower Animation
	"+"		Faster Animation

Fn+Z
Case Light Brightness Change
Fn+X
Case Light Animation Speed Change
Fn+ Left Ctrl
Case Light Effect Change

Bluetooth Feature Overview

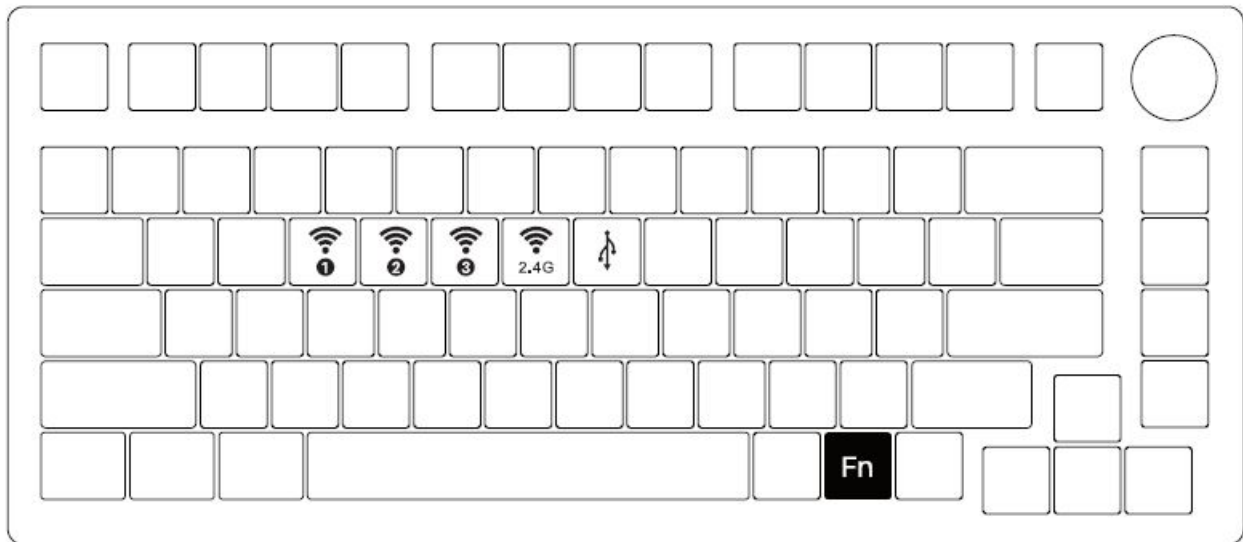

Fn+	E	=	Bluetooth device 1	Short press to connect with slow flashing blue LED; Press and hold to pair device with fast flashing blue LED.
	R		Bluetooth device 2	
	T		Bluetooth device 3	Short press to connect with slow flashing green LED; The lighting effect will be restored when pairing succeeds.
	Y		2.4G wireless device	
	U		Wired mode	

 Back Switch Indicator
Left : Windows
Middle: Switch to USB mode and stop charging. (Windows)
Right: Mac

Bluetooth Setup Instruction

1. Switch to Bluetooth mode

CD When the keyboard remains unplugged, users can push the switch on the back to the left/right to enter Windows/Mac mode correspondingly. Then long press and hold Fn + E / R / T to start pairing with Bluetooth devices. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E/ R/T keys flash quickly. @When the Keyboard is plugged into the computer through USB interface, it will enter Bluetooth mode automatically without having to push the switch on the back. Users can directly long press and hold Fn + E / R / T to enable Bluetooth pairing. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.

2. Set the Bluetooth profile

To help user recognize individual Bluetooth device, the keyboard is equipped with both Bluetooth 5.0 and 3.0 frameworks. The device name under the Bluetooth 5.0 framework is 5075BP-1 / 5075BP-2 / 5075BP-3 while the device name under Bluetooth 3.0 is Akko 5075BP BT3.0. Once the devices are paired through Fn + E/R/T, the system will by default memorize the last connected device before you turn off the Bluetooth mode.

3. Bluetooth Pairing

The keyboard can be paired with PC, Pad, smartphone and other devices with Bluetooth turned on. When you first try to search Bluetooth devices, two groups of device names shall appear with Akko 5075BP BT3.0 (Bluetooth 3.0) and 5075BP-1 (Bluetooth 5.0). Select a Bluetooth group based on your preferences (Note: some devices can only search for the Bluetooth 5.0 group).

4. Switch the Bluetooth device

After 4 Bluetooth devices have been paired with the keyboard, press Fn+E/ Fn+R/ Fn+ T / Fn+Yfor at least 3 seconds to quickly switch between them.

5. Shut off the keyboard

Turn the power off on the keyboard back panel while unused for power saving;

If the keyboard remains unused for over 10 mins, it would go to sleep mode and you can activate it by pressing any key.

Note: The battery saver mode for Windows system would affect/delay the sleep activation time of the keyboard.

6. Reset the keyboard

If you forgot the specific paired front-end device or if there remains disorder in Bluetooth connection and communication, you'll need to clear the computer's Bluetooth cache by removing the 5075 keyboard from the list of connected device.

Key/Lighting Effects Customization Instruction

1. The keyboard supports key/RGB backlit mapping in either 2.4G or wired mode.
2. The keyboard supports audio visualizer in either 2.4G or wired mode.
3. Please download the Akko Cloud driver on our website.
4. Users can download the driver via en.akkogear.com

Akko Warranty and Service Statement

1. Akko provides 1-yr warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Disassembling the keyboard without manufacturer/seller's instruction will immediately void the warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

precaution Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.

www.akkogear.com





[AKKO 5075 B Plus Multi-Host Mechanical Keyboard](#) [pdf] User Manual
5075B, 2A4K8-5075B, 2A4K85075B, 5075 B Plus Multi-Host Mechanical Keyboard, 5075 B Plus, Multi-Host Mechanical Keyboard, Mechanical Keyboard, Keyboard

[Manuals+](#)