



AKKO PC75 B-Plus Multi-Modes Keyboard User Manual

[Home](#) » [AKKO](#) » AKKO PC75 B-Plus Multi-Modes Keyboard User Manual

Contents [[hide](#)]

- [1 AKKO PC75 B-Plus Multi-Modes Keyboard](#)
- [2 Technical Specifications](#)
- [3 HotKeys](#)
- [4 System Commands \(Windows\)](#)
- [5 System Commands\(Mac\)](#)
- [6 Backlight Settings](#)
- [7 Bluetooth Feature Overview](#)
- [8 Bluetooth Setup Instruction](#)
- [9 Key/Lighting Effects Customization Instruction](#)
- [10 Akko Warranty and Service Statement](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)
- [12 Related Posts](#)




AKKO PC75 B-Plus Multi-Modes Keyboard



Technical Specifications


<div>Dimensions</div> <div>Approximately 331*115*46mm</div>	<div>Weight</div> <div>Approximately 1kg</div>	<div>Country of Origin</div> <div>China</div>	<div>Type</div> <div>Mechanical Keyboard</div>
<div>Keycap</div> <div>PBT Material</div>	<div>Connection</div> <div>Bluetooth/USB/2.4Ghz</div>	<div>Interface</div> <div>Type-C To USB</div>	<div>Battery Capacity</div> <div>3000mAh</div>
<div>Multimedia Keys</div> <div>YES</div>	<div>N-Key Rollover</div> <div>YES</div>	<div>Key/Lighting Effects Customization</div> <div>The keyboard can only be customized with driver in wired mode</div>	

HotKeys

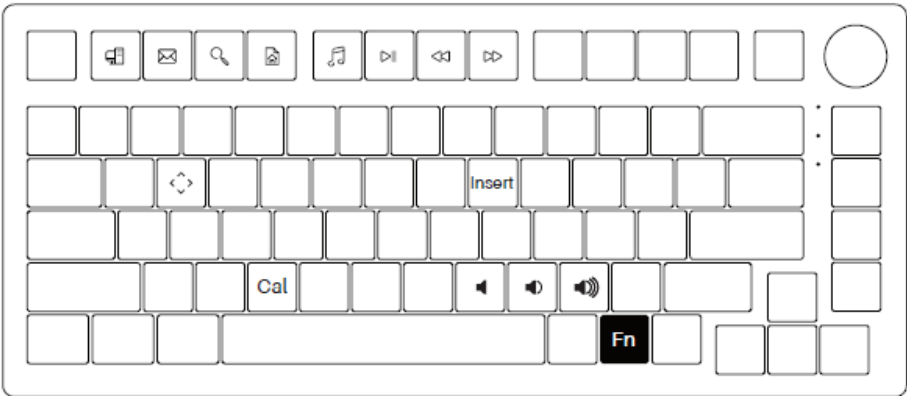


Fn+	F1		File Explorer
	F2		E-mail
	F3	=	Windows Search
	F4		Browser Homepage
	F5		Media
Fn+	F6		Pause /Playback
	F7		Previous Song
	F8	=	Next Song
	I		Insert
	C		Calculator
Fn+	M		Mute
	<		Decrease Volume
	>	=	Increase Volume
	w		Swap W A S D with ↑ ↓ ← →


System Commands (Windows)

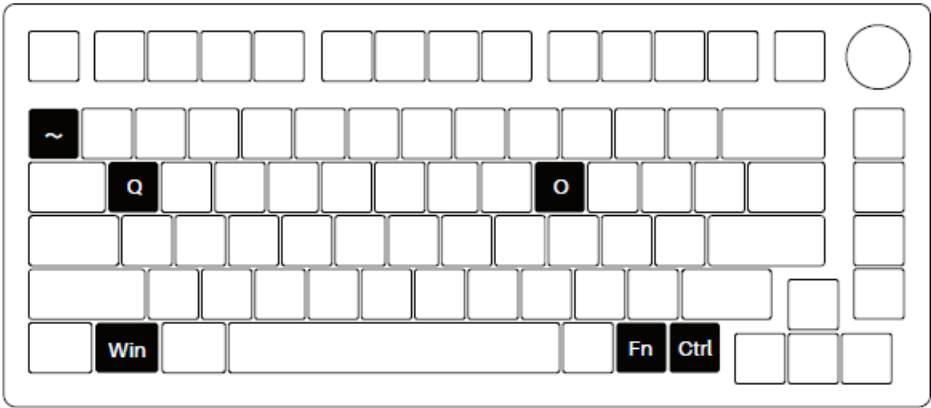

Lock Windows Key	Press Fn and left Win key
Restore Factory Settings	Hold down Fn and press ~ key for 5S
Revert Ctrl into Menu (APP) key	Hold down Fn and press right Ctrl for 3S




System Commands(Mac)

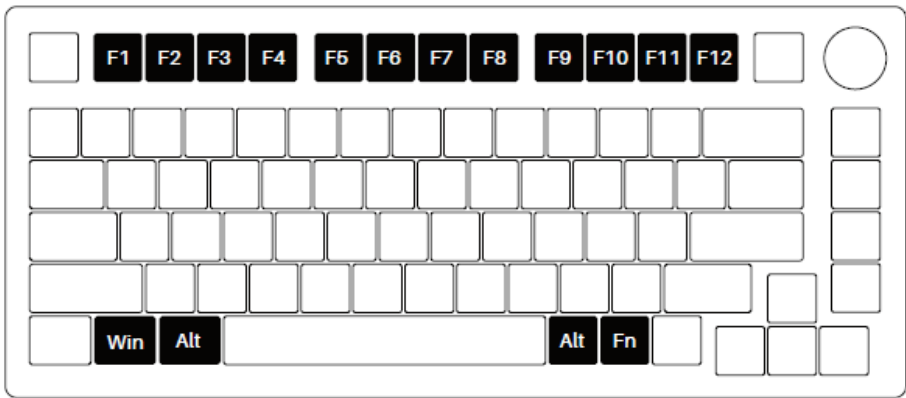

F1	Decrease display brightness	F7	Skip back (Audio)	F11	Volume down	Right Alt	Command
F2	Increases display brightness	F8	Pause/Play (Audio)	F12	Volume up	<div>Fn + (F1 ~ F12)</div> <div>F1 ~ F12</div>	
F3	Open mission control	F9	Skip forward (audio)	Left Win	Option		
F4	Activate Siri	F10	Mute	Left Alt	Command		

Backlight Settings

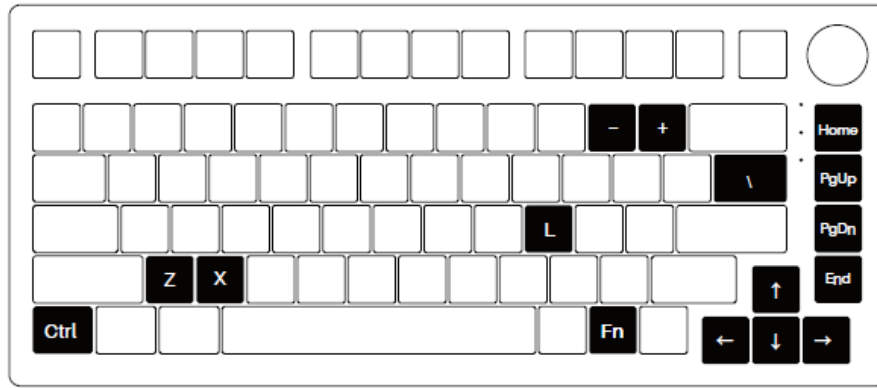


Caps Lock
Battery Level Indicator
Lock Win

Fn+	Home	=	Effect 1, Effect 2, Effect 3, Effect 4, Effect 5
	PgUp		Effect 6, Effect 7, Effect 8, Effect 9, Effect 10
	PgDn		Effect 11, Effect 12, Effect 13, Effect 14, Effect 15
	End		Effect 16, Effect 17, Effect 18, Effect 19, Effect 20
	L		Light On / Off
	\		In all lighting effects with RGB color mode, this shortcut allows you to set the backlight color to 7 single color with RGB loop effect.

Fn+	"↑"	=	Bright
	"↓"		Dim
	"←"		Set animation direction to left
	"→"		Set animation direction to Right
	"-"		Slower Animation
	"+"		Faster Animation

Fn+Z	PC Case Light Brightness Change
Fn+X	PC Case Light Animation Speed Change
Fn+ Left Ctrl	PC Case Light Effect Change

Bluetooth Feature Overview

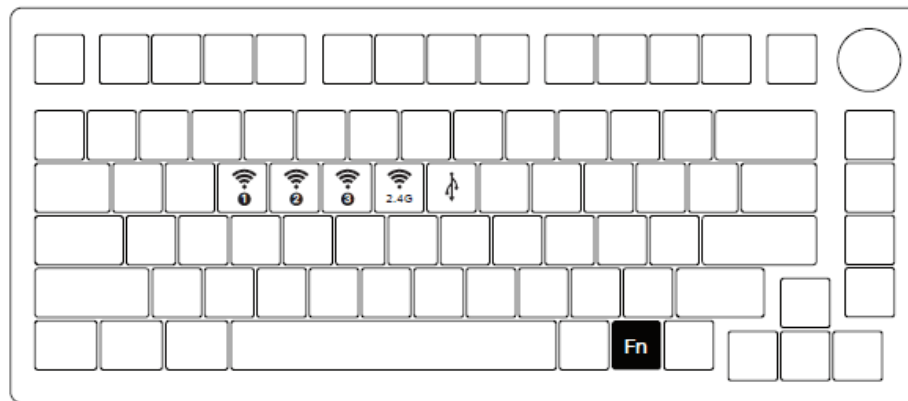

Fn+	E	=	Bluetooth device 1
	R		Bluetooth device 2
	T		Bluetooth device 3
	Y		2.4G wireless device
	U		Wired mode

Short press to connect with slow flashing blue LED;
Press and hold to pair device with fast flashing blue LED.

Short press to connect with slow flashing green LED;
The lighting effect will be restored when pairing succeeds.



Back Switch Indicator

Left : Windows

Middle: Switch to USB mode and stop charging. (Windows)

Right: Mac

Bluetooth Setup Instruction

Switch to Bluetooth mode

When the keyboard remains unplugged, users can push the switch on the back to the left/right to enter Windows/Mac mode correspondingly. Then long press and hold Fn + E / R / T to start pairing with Bluetooth devices. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.

When the Keyboard is plugged into the computer through USB interface, it will enter Bluetooth mode automatically without having to push the switch on the back. Users can directly long press and hold Fn + E / R / T to enable Bluetooth pairing. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.

Set the Bluetooth profile

To help user recognize individual Bluetooth device, the keyboard is equipped with both Bluetooth 5.0 and 3.0

frameworks. The device name under the Bluetooth 5.0 framework is Akko PC75 BT-1 / Akko PC75 BT-2 / Akko PC75 BT-3 while the device name under Bluetooth 3.0 is AKK0 PC75 BT3.0. Once the devices are paired through Fn + E/R/T, the system will by default memorize the last connected device before you turn off the Bluetooth mode.

Bluetooth Pairing

The keyboard can be paired with PC, Pad, smartphone and other devices with Bluetooth turned on. When you first try to search Bluetooth devices, two groups of device names shall appear with Akko PC75 BT3.0 (Bluetooth 3.0) and Akko PC75-1 (Bluetooth 5.0). Select a Bluetooth group based on your preferences (Note: some devices can only search for the Bluetooth 5.0 group).

Switch the Bluetooth device

After 4 Bluetooth devices have been paired with the keyboard, press Fn+E / Fn+R / Fn+T / Fn+Y for at least 3 seconds to quickly switch between them.

Shut off the keyboard

Turn the power off on the keyboard back panel while unused for power saving; If the keyboard remains unused for over 10 mins, it would go to sleep mode and you can activate it by pressing any key.

Note: The battery saver mode for Windows system would affect/delay the sleep activation time of the keyboard.

Reset the keyboard

If you forgot the specific paired front-end device or if there remains disorder in Bluetooth connection and communication, you'll need to clear the computer's Bluetooth cache by removing the PC75 keyboard from the list of connected device.

Key/Lighting Effects Customization Instruction

1. The key/lighting effects customization can be programmed by Akko driver.
2. In wired mode, the lighting effects can also achieve audio visualizer effects with Akko driver.
3. Please download the Akko Cloud driver on our website.
4. Users can download the driver via en.akkogear.com

Akko Warranty and Service Statement

1. Akko provides 1-yr warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Disassembling the keyboard without manufacturer/seller's instruction will immediately void the warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Precautions: Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.

Documents / Resources



[AKKO PC75 B-Plus Multi-Modes Keyboard](#) [pdf] User Manual
PC75, B-Plus Multi-Modes Keyboard

References

- [Manuals+](#), [home](#) [privacy](#)