

ACASIS DS-9002 13 In 1 40Gbps Type-C Hub featured



ACASIS DS-9002 13 In 1 40Gbps Type-C Hub User Manual

[Home](#) » [ACASIS](#) » ACASIS DS-9002 13 In 1 40Gbps Type-C Hub User Manual 

Contents

- [1 ACASIS DS-9002 13 In 1 40Gbps Type-C Hub](#)
- [2 Package Contents](#)
- [3 Features](#)
- [4 Connection Demonstration](#)
- [5 Specifications](#)
- [6 Support](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)

ACASIS

ACASIS DS-9002 13 In 1 40Gbps Type-C Hub




Dear customers,

Thank you for purchasing our product. In order for you to further understand the product, please read this manual carefully before use. Enjoy your purchase'

Package Contents

- 1 * 13-in-1 40Gbps Type-C Hub
- 1 * 1.7ft Thunderbolt 4 cable
- 1 * DC power adapter{20V/6A}
- 1 * User manual


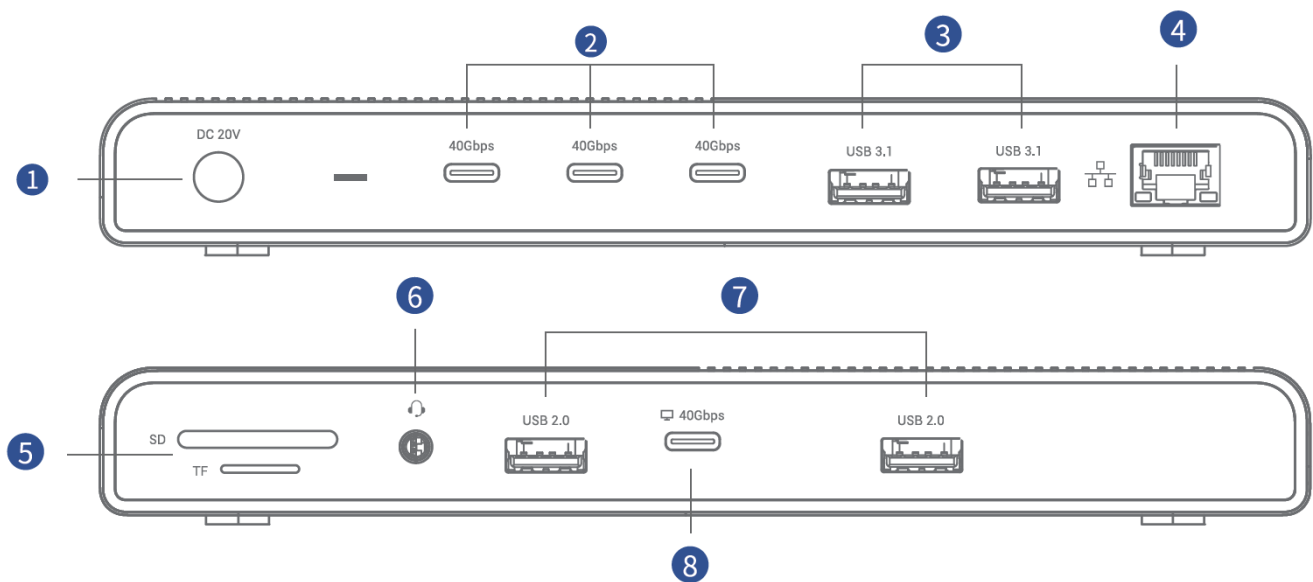


1. DC 20V port
2. USB-C 40Gbps port
3. USB-A 3.1 1 OGbps
4. Gigabit Ethernet RJ45 port
5. SD/TF 4.0 port
6. Audio 3.5mm port
7. USB-A 2.0 port
8. USB-C All-function port

Features

- 13 in 1: 3*USB-C 40Gbps port, 2* USB-A 3.1 Gen 1 IOGbps port, 1 *Gigabit Ethernet RJ45, 2*USB 2.0 Type-A, 1 *USB-C All-function port, 1 *3.5mm Mic/Audio, 1*SD/TF 4.0 Card Reader, 1*DC Input.
- USB-C 40 Gbps : Data transfer: Up to 40 Gbps (compatible with USB 3.1/3.0/2.0), Connect monitor: A single monitor supports up to 8K/60Hz, two monitors support up to 2*4K/60Hz.
- USB-A 3.1 Gen 1 IOGbps: Up to 10 Gbps (compatible with USB 3.0/2.0).
- Gigabit Ethernet RJ45: Support 10/100/1000 Mbps Network.
- USB-A 2.0 : Up to 480Mbps(compatible with USB 1.1/1.0).
- USB-C Multi-function Display-port: Up to 40Gbps(compatible with USB 3.1 /3.0/2.0), support DP Alt Mode 1.4, support up to PD 60W charging.
- 3.5mm Mic/Audio: Support mic/audio and volume up/down.
- SD/TF 4.0 Card Reader: Up to 312MB/s, support SD/TF read/write at the same time.
- Aluminum alloy shell for fast heat dissipation.
- Compatible with Windows 7/7 0/17, Mac OS 70.2 and above, Linux.

Connection Demonstration

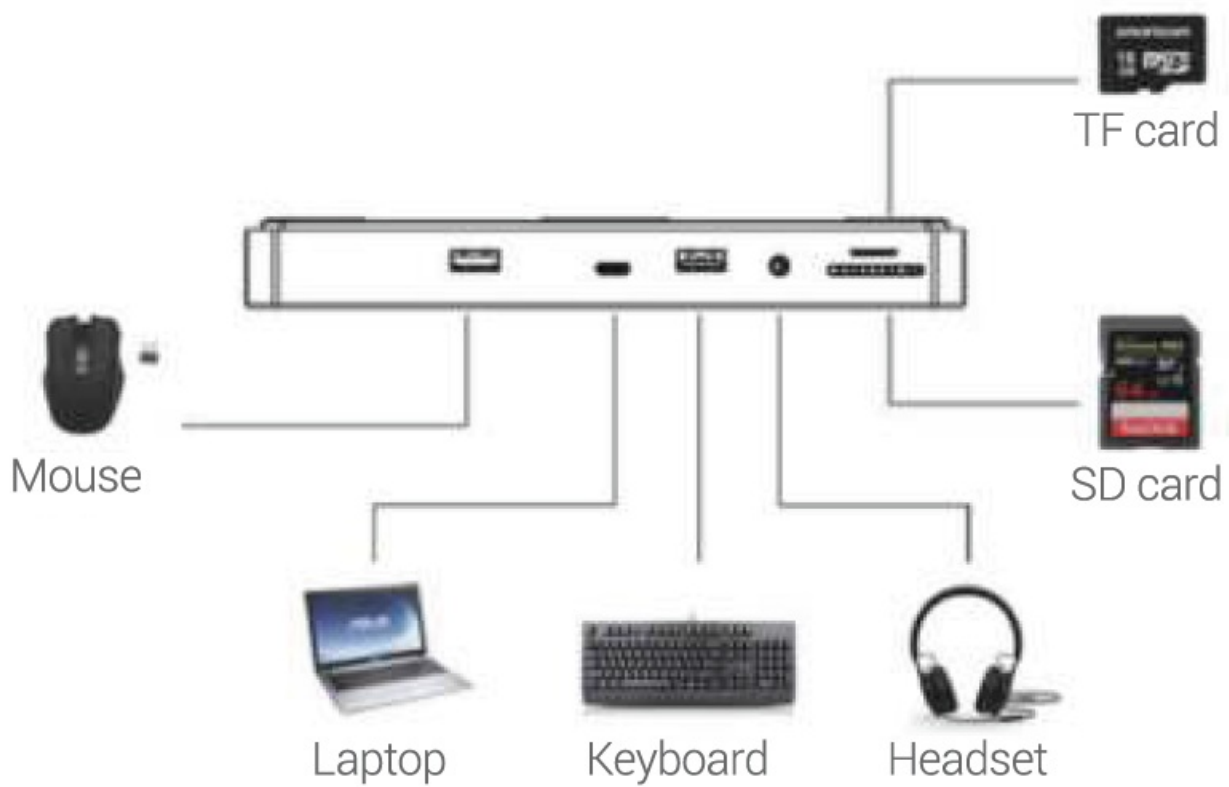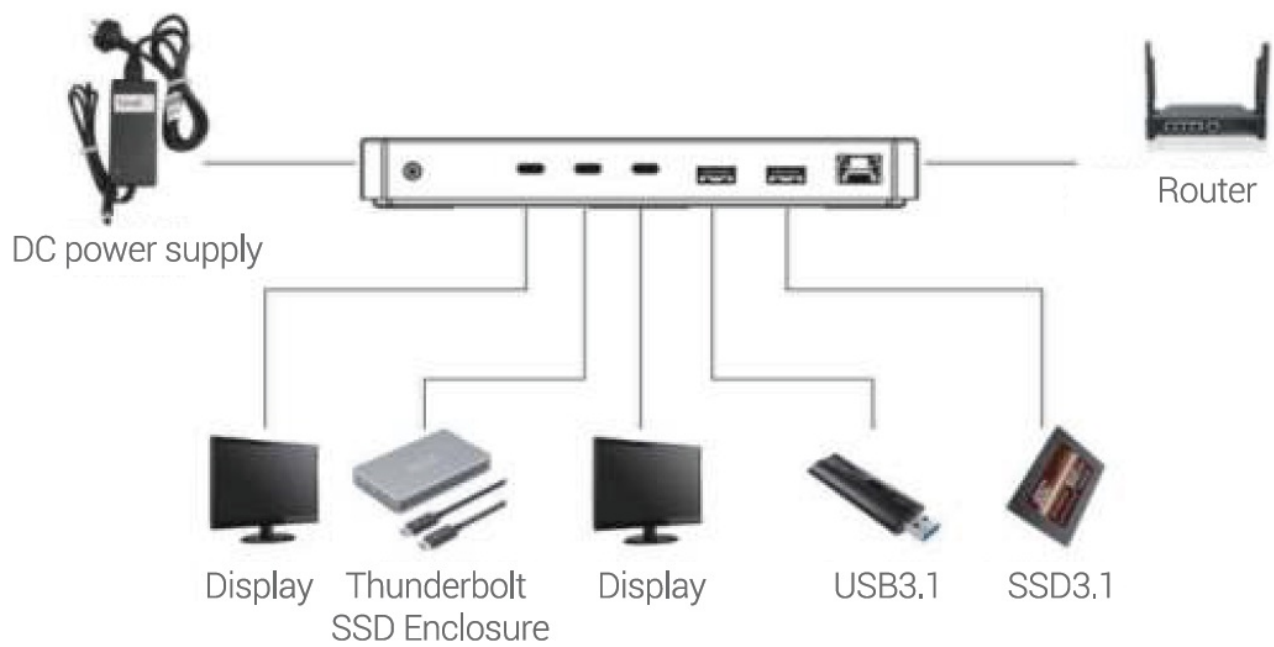

Specifications

Product Name	13-in-1 40Gbps Type-C Hub/Dock
Product Model	DS-9002
Material/Color	Aluminum/Space Gray
Size	7.5*27*0.9in{Product} 8.1*5.7*2.44in{Package}
Upstream Interface	1*USB-C All-function Port(PD 60W) 7*DC Input Port{20V/6A}
Extension Interface	3*USB-C 40Gbps port 2*USB-A 3.1 IOGbps 1*Gigabit Ethernet RJ45 2*USB-A 2.0 480MB/S 7*3.5mm Mic/Audio 1*SD/TF 4.0 Ports
Systems Requirements	Windows 7/70/17Mac OS 70.2 and above Linux

Cautions

- Protect the product against moisture.
- Avoid direct sunlight.
- Keep this product away from all sources of liquid.
- Don't place this powered hub or charging cable under a blanket, pillow, or your body.
- Ensure the charging cable or USB cable does not get caught in or twisted with other objects.
- Clean this hub gently and only with a dry cloth.
- Do not use this product near any heat sources.

Support

If you have any questions, please contact our customer support: at support@acasis.com

Copyright

No part of this user manual may be reproduced or transmitted for any purpose, regardless in which way or by any means, electronically or mechanically, without the explicit written approval of ACASIS.

Documents / Resources



[ACASIS DS-9002 13 In 1 40Gbps Type-C Hub](#) [pdf] User Manual
DS-9002, DS-9002 13 In 1 40Gbps Type-C Hub, 13 In 1 40Gbps Type-C Hub, 40Gbps Type-C H
ub, Type-C Hub, Hub

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.