


# **Alecto** **DVM2043C** **Extra** **Camera**



## **Alecto DVM2043C Extra Camera User Manual**

[Home](#) » [Alecto](#) » Alecto DVM2043C Extra Camera User Manual 

### **Contents**

- [1 Alecto DVM2043C Extra Camera](#)
- [2 FAQs](#)
- [3 What's in the box](#)
- [4 Overview](#)
- [5 Connect and power on the baby unit](#)
- [6 Before use](#)
- [7 Positioning the baby monitor](#)
- [8 Mount the baby unit on drywall](#)
- [9 Tips and remarks](#)
- [10 Specifications](#)
- [11 Important safety instructions](#)
- [12 Documents / Resources](#)
  - [12.1 References](#)

# **Alecto**


**Alecto DVM2043C Extra Camera**




## FAQs

- **Q: What should I do if the product range is shorter than specified?**
  - A: Check for any obstacles or interferences that may be affecting the signal transmission. Reposition the units for better connectivity.
- **Q: Can I use a different power adaptor with the baby unit?**
  - A: It is recommended to use the provided 5V DC 1A power adaptor to ensure proper functionality and safety.

## What's in the box

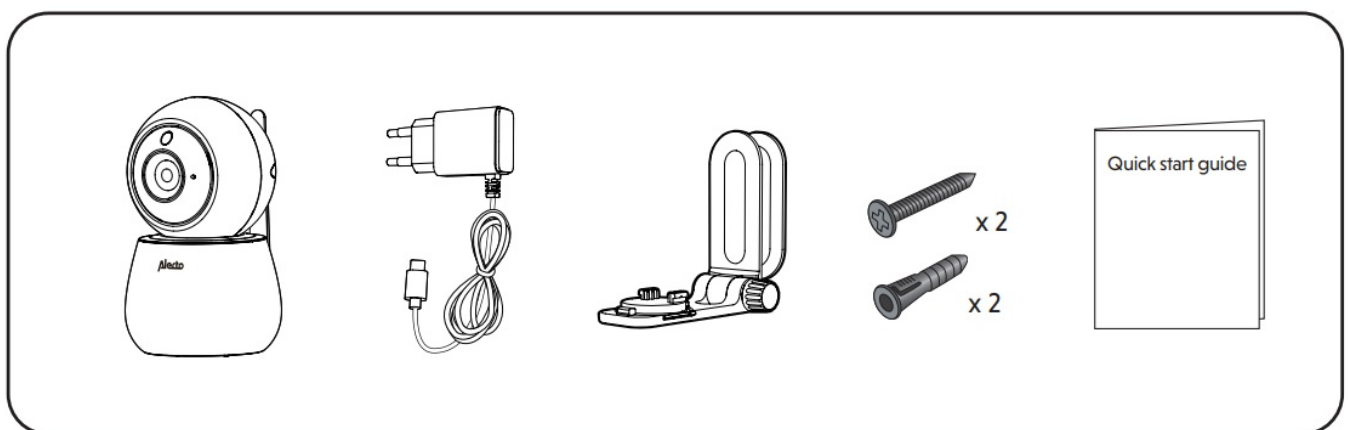

## Overview

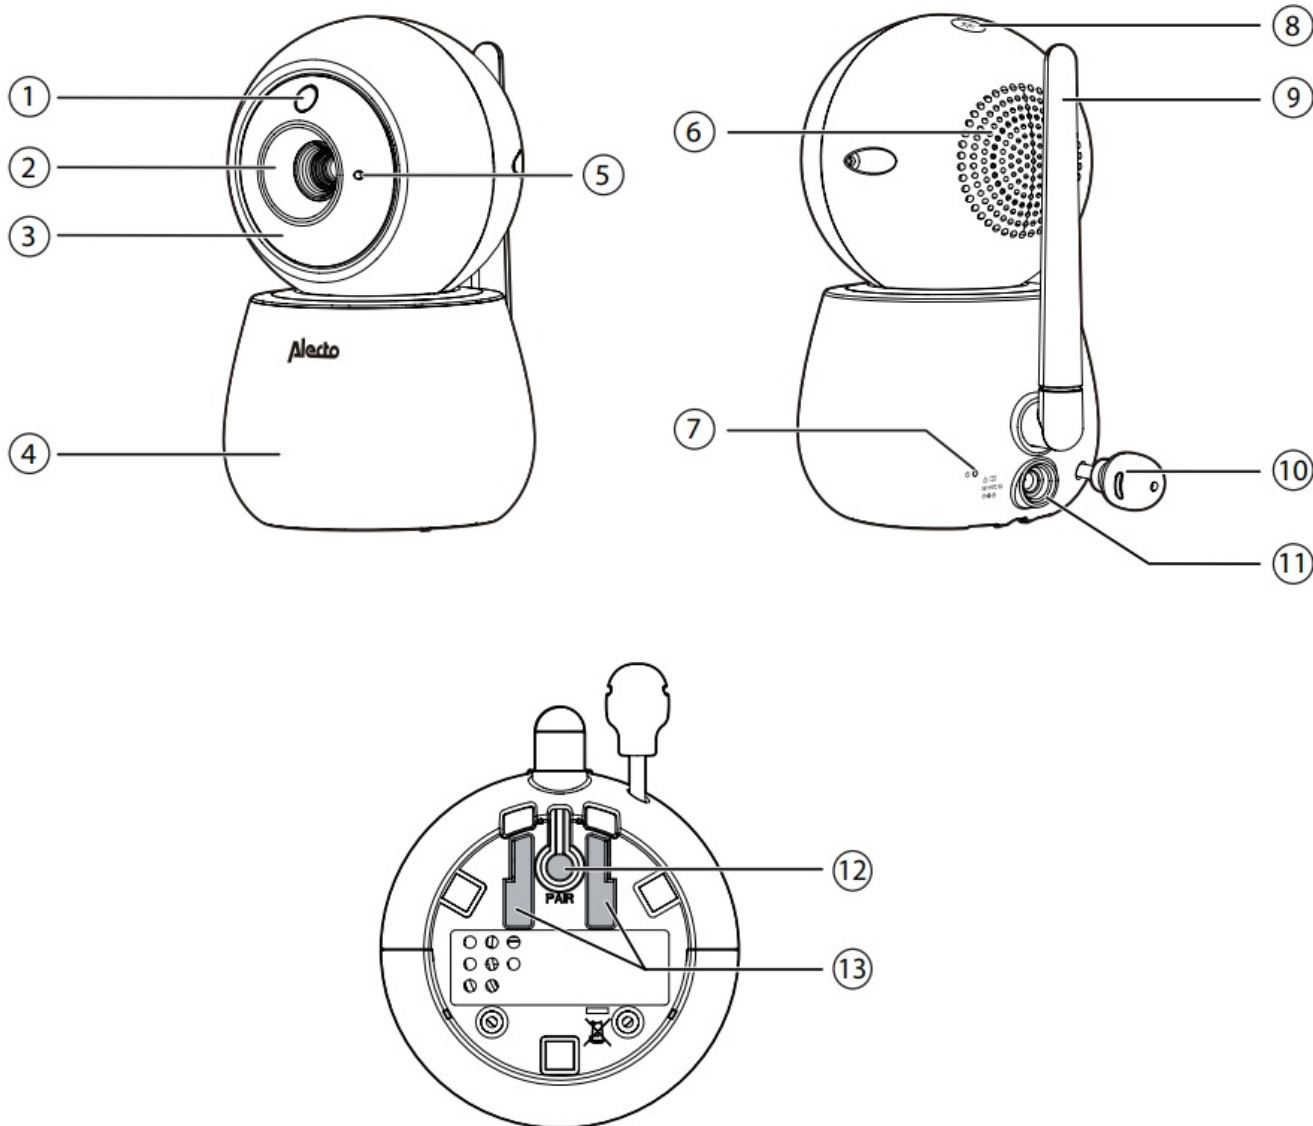

1. Light sensor
2. Camera
3. Infrared LEDs
4. Night light
5. Microphone
6. Speaker
7. POWER LED light
  - On when the baby unit is turned on and is paired to the parent unit.
  - Flashes when the link to the parent unit has lost.




8. Night light on/off key

9. Antenna
10. Temperature sensor
11. Power jack
12. PAIR key
  - Press and hold for 3 seconds to enter paring mode.
13. Slots for wall mountung

## Connect and power on the baby unit

### NOTES

- Use only the power adaptor supplied with this product.
- Make sure the baby unit are not connected to an electronically/timer-controlled electric power outlet.
- Connect the power adaptor in a vertical or floor mount position only. The adaptor prongs are not designed to hold the weight of the baby unit. Otherwise, the adaptor may not properly connect to the outlets.
- Make sure the baby unit and the power adaptor cords are out of reach of children.

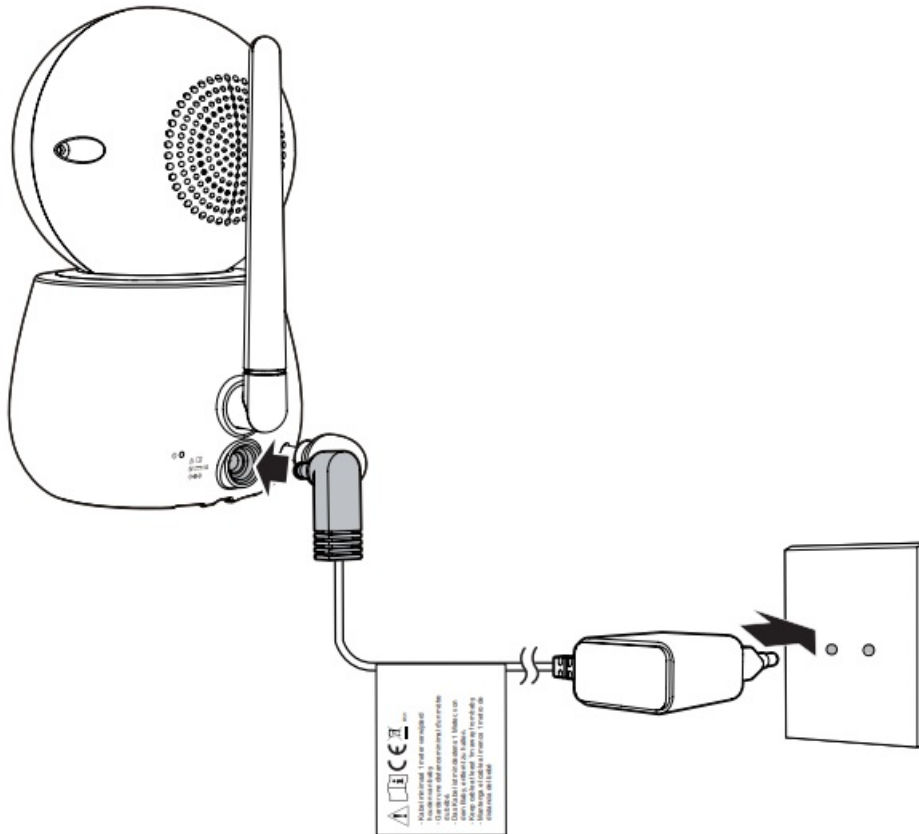

### Before use


#### Pair a new baby unit

Each newly purchased baby unit (DVM2043C) must be paired to your system (DVM2043).

### NOTES

- You can pair an additional baby unit with your parent unit. The new baby unit must be paired to the parent unit before use.
- Make sure you power on the parent unit before pairing


1. Turn on your parent unit and baby unit.

2. Press  when the parent unit is idle.


3. Go to  > , select .

- If you have more baby units: select , then select ,  or .

4. Press and hold the PAIR button for 3 seconds until you hear a “beep”.

5. When the baby unit is successfully paired with your parent unit, the parent unit displays  and the live video.

## Positioning the baby monitor

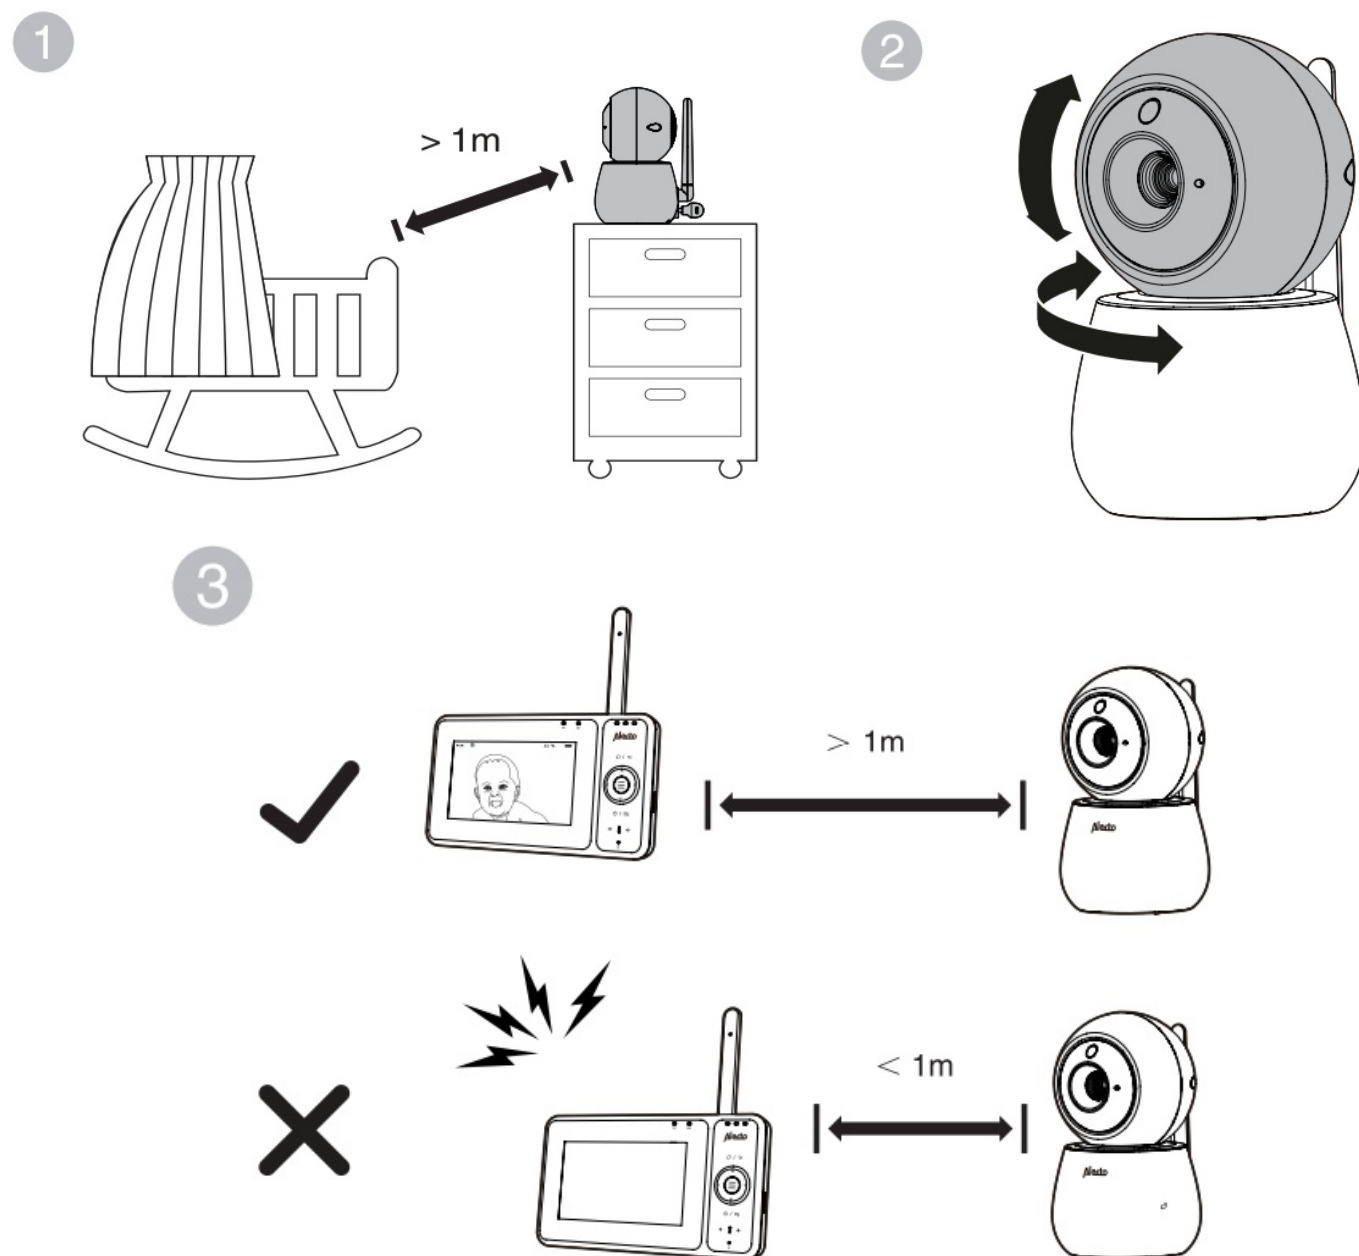

### Caution


- The manufacturing preset volume of your parent unit is level 4, and the maximum volume is level 7. If you experience feedback noise from your baby monitor while positioning:
  - Make sure your baby unit and parent unit are more than 1 meter apart, OR
  - Lower the volume of your parent unit.

## Mount the baby unit on drywall


## Mount the baby unit on drywall (optional)

### Notes TES


- Check for reception strength and camera angle before drilling the holes.
  - The types of screws and wall plugs you need depend on the composition of the wall. You may need to purchase the screws and wall plugs separately to mount your camera units.
1. Place the wall mount bracket on a wall and then use a pencil to mark two holes in parallel. Remove the wall mount bracket and drill two holes in the wall (5.5mm drill bit).

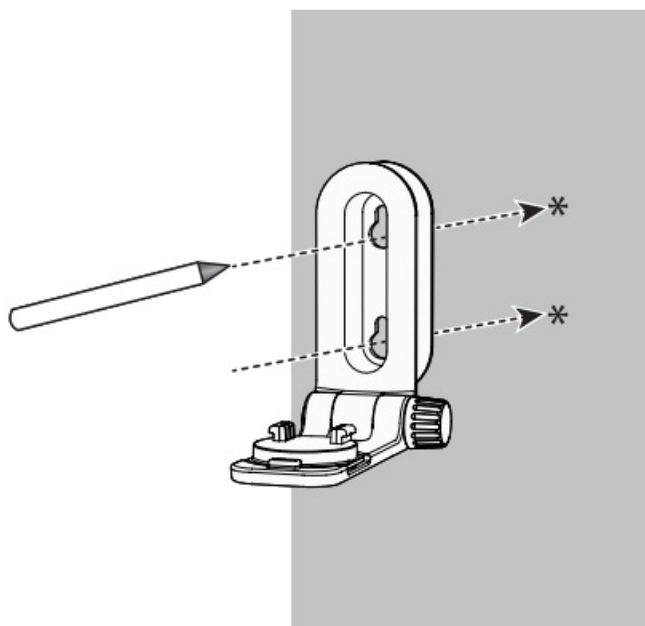


2. If you drill the holes into a stud, go to step 3.
  - If you drill the holes into an object other than a stud, insert the wall plugs into the holes. Tap gently on the ends with a hammer until the wall plugs are flush with the wall.

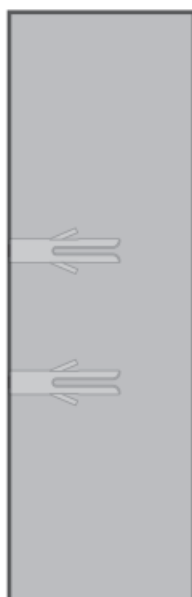


3. Align the wall mount bracket and screws with the holes in the wall as shown. Tighten the screw in the middle hole first, so that the wall mount bracket position is fixed. You can tighten the other screw in the top hole.

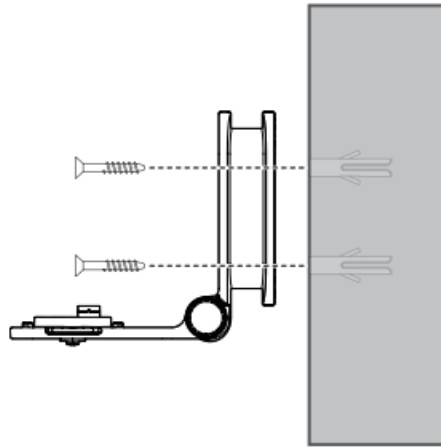

- Insert the screws into the holes and tighten the screws until only 6.5mm of the screws are exposed.

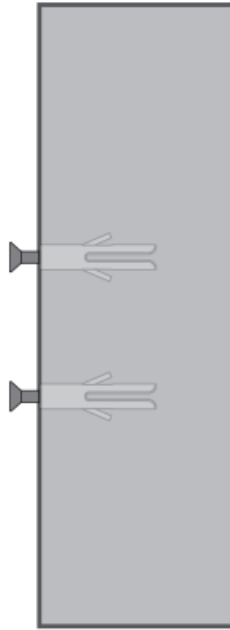


4. Place the camera unit on the wall mount bracket, and then slide it forward until it locks into place. Connect the power adaptor to the camera unit and a power supply

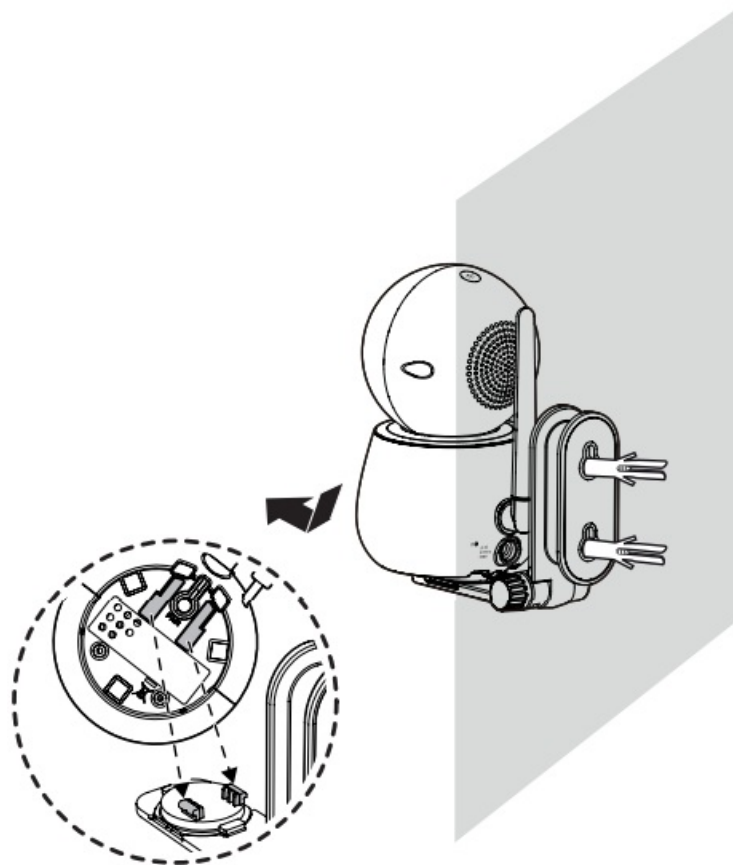


- Place the camera unit on the wall mount bracket, and then slide it forward until it locks into place. Align the holes on the wall mount bracket with the screws on the wall, and slide the wall mount bracket down until it locks into place.

1

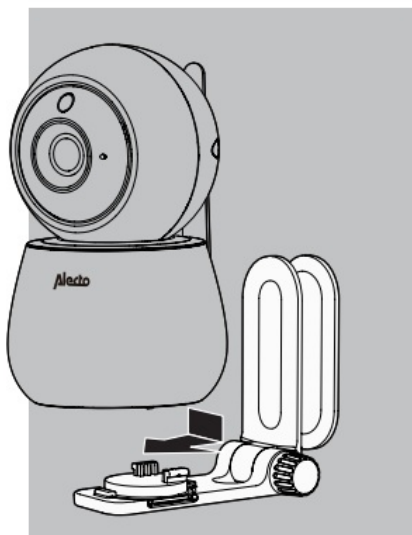


2

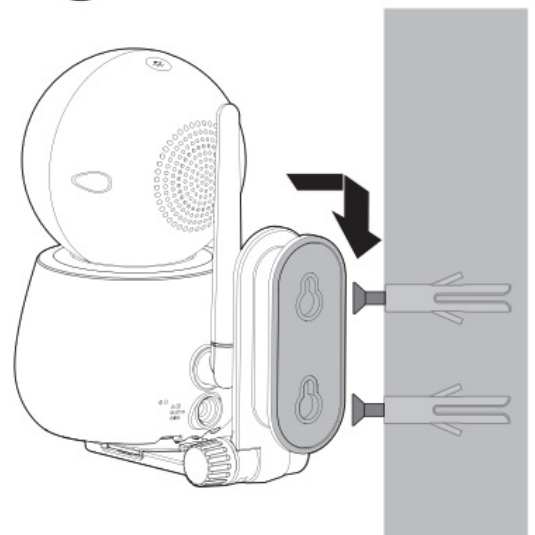

5. You can maximise your camera unit viewing angle by tilting the wall mount bracket. Hold the camera unit, and then rotate the knob in an anticlockwise direction. This will loosen the joint of the wall mount bracket. Tilt your camera unit up or down to adjust to your preferred angle. Then, rotate the knob in a clockwise direction to tighten the joint and secure the angle.



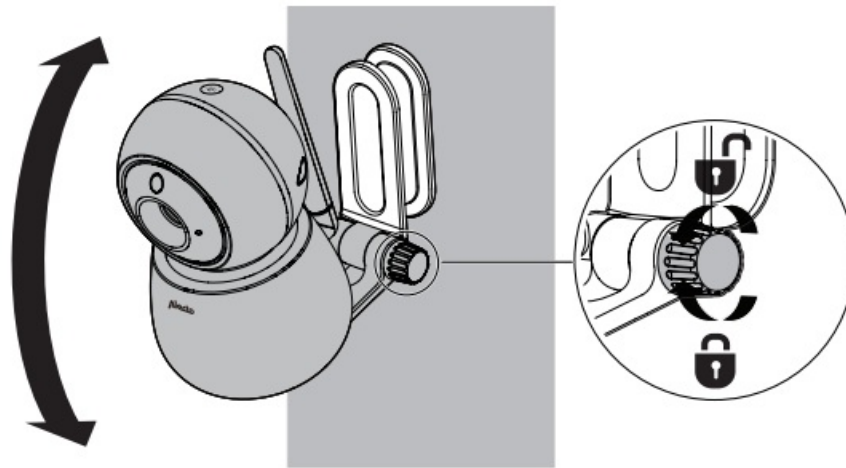

## **Tips and remarks**

### **INTERFERENCE-FREE:**

This baby display monitor is digitally coded. This means you will never receive signals from other devices, nor can the signal from your baby unit(s) be received by e.g. your neighbors. In case the baby unit(s) or parent unit is placed in or in the close vicinity of electromagnetic fields, the signal (images or sound) can be slightly affected. If this happens, try a different location for the baby unit(s) or parent unit or move, if possible, the source of the interference.

### **EAVESDROPPING/WIRETAPPING:**

Eavesdropping/wiretapping of the signals from this baby video monitor is nearly impossible. Not only must one be within range of the baby video monitor, one also needs some very costly equipment.

### **MAINTENANCE:**

Only clean the baby monitor with a moist cloth; never use chemical cleaners. Before any cleaning, you must disconnect the adaptors.

### **RANGE:**

The baby display monitor has a range of up to 300 meters in an open field and up to 50 meters indoors; this range depends on local circumstances.

### **DELAY IN IMAGES AND SOUND:**

The baby unit transmits the images and sounds to the parent unit in digital blocks. The parent unit converts these signals back to a recognizable image and a comprehensible sound. Therefore, there is a small delay between the moment of movement and making sounds and the display and sounds of the parent unit. Besides that, the sounds and images on the parent unit are not exactly simultaneous.

### **ATTENTION**

Before you start using the product, please remove any protective foil from the baby unit.

## **Specifications**

- **Range:**

- up to 50 meters indoors
- up to 300 meters outdoors

- **Baby unit power:**

- 5V DC 1A power adaptor (incl.)
- Model: VT05EEU05100
- Frequency: 2405-2475 MHz
- Modulation: FSK
- RF-power: <20 dBm

## **Important safety instructions**

The applied nameplate is located at the bottom of the baby unit's base.

1. CAUTION: Do not install the baby unit at a height above 2 meters.
2. Use and store the product at a temperature between 0oC and 40oC.

## **Declaration of conformity**

Hereby, Commaxx declares that the radio equipment type Alecto DVM2043C is in compliance with directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following Internet address: [https://commaxx-certificates.com/doc/DVM2043C\\_doc](https://commaxx-certificates.com/doc/DVM2043C_doc) Use of this equipment is allowed in all countries of the EU. In France, Italy, Russia and Ukraine, only indoor use is allowed.

## **Information power adaptor baby unit:**

Manufacturer name and address:


- Vtech Telecommunications LTD, 23/F.,
- Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road,
- Tai Po, Hong Kong.
- Model Identifier: VT05EEU05100
- Input voltage: 100 – 240V~
- Input AC frequency: 50/60 Hz
- Output voltage: 5.0V DC
- Output current: 1A
- Output power: 5.0 W
- Average active efficiency: 74.0 %
- Efficiency at low 10% load: –
- No load power consumption: 0.07 W

Video baby monitor – Baby unit Commaxx B.V., Wiebachstraat 37, 6466 NG Kerkrade, The Netherlands  
[support.alectobaby.nl](https://support.alectobaby.nl)

## **MORE INFO**

- Commaxx BV
- Wiebachstraat 37
- 6466 NG Kerkrade
- The Netherlands
- [www.alectobaby.com](http://www.alectobaby.com)

## Documents / Resources

	<a href="#">Alecto DVM2043C Extra Camera</a> [pdf] User Manual DVM2043C Extra Camera, DVM2043C, Extra Camera, Camera
---	---

## References

-  [Support : Alecto Baby](#)
-  [Alecto Baby | #1 in Babyfoons & Babycare](#)
-  [Commaxx Certificates](#)
- [User Manual](#)

### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.