




ALLEGION 8310-845 Programmable 3-Relay Advanced Logic Module and Restroom Controller Instruction Manual

[Home](#) » [Allegion](#) » ALLEGION 8310-845 Programmable 3-Relay Advanced Logic Module and Restroom Controller Instruction Manual 



8310-845
Programmable, 3-Relay, Advanced
Logic Module & Restroom Controller
(US version)

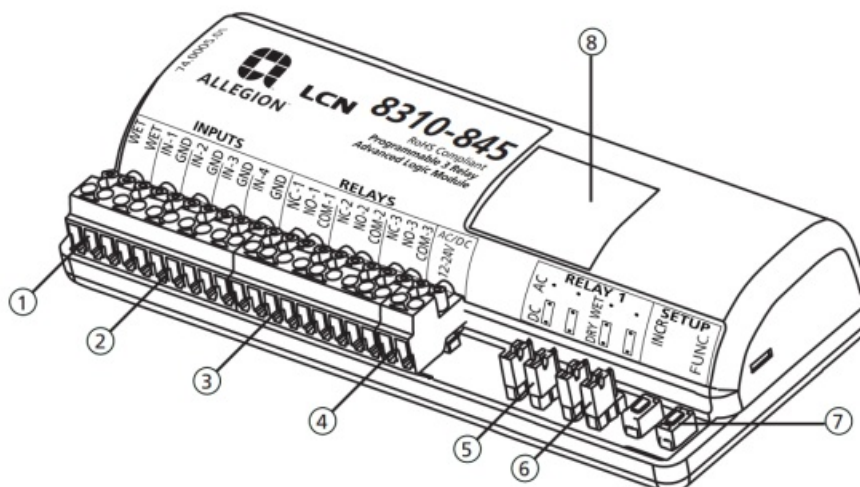

75.5954.03 ALLEGION 8310-845 20220727

1. WET input
2. DRY inputs

3. Relay outputs
4. Power input
5. AC/DC jumpers
6. WET/DRY jumpers
7. Programming buttons
8. 7-segment display

Contents

- 1 PRECAUTIONS
- 2 JUMPERS
- 3 FUNCTIONS
- 4 PARAMETERS
- 5 PROGRAMMING
- 6 PROGRAMMING PARAMETERS
- 7 FUNCTION CROSS REFERENCE
- 8 TROUBLESHOOTING
- 9 TECHNICAL SPECIFICATIONS
- 10 Documents / Resources
 - 10.1 References

PRECAUTIONS



CAUTION

- Shut off all power going to header before attempting any wiring procedures.
- Maintain a clean & safe environment when working in public areas.
- Constantly be aware of pedestrian traffic around the door area.
- Always stop pedestrian traffic through the doorway when performing tests that may result in unexpected reactions by the door.
- ESD (electrostatic discharge): Circuit boards are vulnerable to damage by electrostatic discharge. Before handling any board ensure you dissipate your body's ESD charge.
- Always check placement of all wiring before powering up to ensure that moving door parts will not catch any wires and cause damage to equipment.
- Ensure compliance with all applicable safety standards (i.e. ANSI A156.10) upon completion of installation.
- DO NOT attempt any internal repair of the components. All repairs and/or component replacements must be performed by Allegion, Inc. Unauthorized disassembly or repair:
 1. May jeopardize personal safety and may expose one to the risk of electrical shock.
 2. May adversely affect the safe and reliable performance of the product resulting in a voided warranty.

JUMPERS

PRECAUTIONS TO OBSERVE WHEN USING A 'WET' OUTPUT

Never change the jumper settings when the module has power connected to it or when a load is applied.
Never allow 2 different voltage sources to be connected to the load (electric strike for example) at the same time.

This can result in serious damage to equipment.

Always move both jumpers when changing a jumper set.

If an EL device is being powered by a separate power source, DO NOT select the 'WET' output option on the 8310-845. If 'WET' is selected, the next activation of the module will send a voltage to the load and if there is already a voltage being applied from another source, the 8310-845 and possibly the load will be permanently damaged.

When using the 'WET' output option on the 8310-845, set all desired switch positions ('WET' – 'DRY' and AC – DC) before the module is powered and before any loads are applied.

When DC 'WET' output is selected, COM terminal is positive (+) and the ground (-) is switched between NO and NC.


Ensure there is no other voltage connected to the load. Whatever the input voltage is at the 8310-845, the output will correspond. The following can also be observed:

1. If voltage input at the 8310-845 is AC, then output selection can be AC or DC.
2. If voltage input at the 8310-845 is DC, then output selection can only be DC.
3. The maximum load applied to Relay 1 should never exceed 1A. If more than one device is to be connected, add the consumption values together for a total value. If current is excessive, damage to equipment can result.
4. On the 8310-845, the 'WET' output is only available at Relay 1.

When supplying 8310-845 with AC input voltage and selecting Relay 1 output for 'WET' and DC OUTPUT VOLTAGE, note that the resulting DC output will be the rectified AC input voltage and therefore, about 40% higher than the AC input voltage (rms).

CAUTION: Relay 1 'WET' OPTION IS ACTIVE FOR ALL FUNCTIONS!

RELAY 1 OUTPUT	DRY/WET JUMPER2	AC OUTPUT VOLTAGES	DC OUTPUT VOLTAGE)
DRY	both jumpers set to DRY	N/A	N/A
WET'	both jumpers set to WET	both jumpers set to AC	both jumpers set to DC

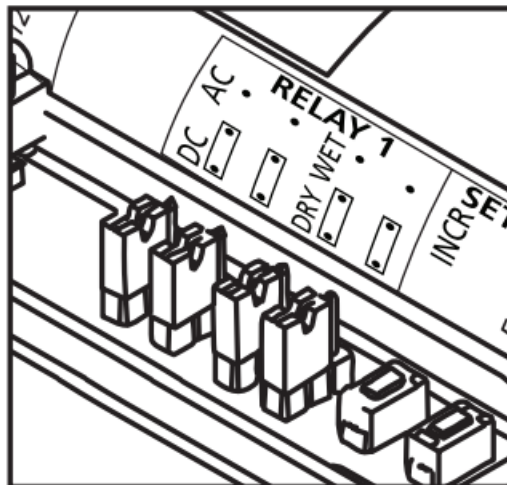

NOTES:

1. "WET output" allows the 8310-845 to supply a voltage output of up to 1 A on relay 1 for powering Maglocks or Electric Strikes directly from the 8310-845.
Rating of power supply which powers the 8310-845 must be at least 1 A.
2. Default jumper settings make relay 1 DRY.
3. AC voltage only available if 8310-845 is powered by AC voltage.
4. DC voltage available if 8310-845 is powered by AC or DC voltage.

WIRING

Each 8310-845 function is wired differently. Please review and follow the appropriate wiring diagram shown for each function.


FUNCTIONS

FUNCTION	DESCRIPTION	LOGIC
10	timer	<ul style="list-style-type: none"> activation of relay 1 via trigger of input 1 reverse logic available
11	ratchet / latching	<ul style="list-style-type: none"> ratchet/latching of relay 1 via trigger of input 1
22	2-relay sequencer + inhibitor	<ul style="list-style-type: none"> sequence of relay 1 and relay 2 with inhibiting of input 1 until input 2, input 3, or WET input is triggered activation of input 4 reinhibits input 1
28	2-relay sequencer + door position	<ul style="list-style-type: none"> sequence of relay 1 and relay 2 via trigger of input 1 or WET input input 2 allows delay to run when open but not when closed
29	deactivation timer	<ul style="list-style-type: none"> sequence of relay 1 and relay 2 via trigger of input 1 or WET input input 2, once opened after sequence, allows relay 1 to deactivate input 2 allows delay to run when open but not when closed input 3 disables sequence, reverse logic available
36	3-relay sequencer + '1-shot'	<ul style="list-style-type: none"> sequence of relay 1 and relay 2 and relay 3 via trigger of input 1 or WET input relay 1, relay 2, and relay 3 can be maintained or '1-shot'
	3-relay sequence with 'independent relay'	<ul style="list-style-type: none"> sequence of relay 1 and relay 2 and relay 3 via trigger of input 1 or WET input relay 1, relay 2, and relay 3 can be 'independent or sequenced'
50	interlock timer	<ul style="list-style-type: none"> interlock of relay 1 and relay 2 via trigger of input 1 and input 2, respectively
55	interlock ratchet /latching	<ul style="list-style-type: none"> interlock ratchet of relay 1 and relay 2 via trigger of input 1 and input 2, respectively
65	2-way 2-relay sequence	<ul style="list-style-type: none"> sequence of relay 1 and relay 2 via trigger of input 1 sequence of relay 2 and relay 1 via trigger of input 2 input 3 triggers relay 1 individually, input 4 triggers relay 2 individually
nL	normally locked restroom	<ul style="list-style-type: none"> sequence of relay 1 (lock), relay 2 (door), and relay 3 (occupied indicators) for normally locked, single occupancy restrooms
nU	normally unlocked restroom	<ul style="list-style-type: none"> sequence of relay 1 (lock), relay 2 (door), and relay 3 (occupied indicators) for normally unlocked, single occupancy restrooms
dn	3-relay sequencer 4- 'day / night mode'	<ul style="list-style-type: none"> sequence of relay 1 and relay 2 and relay 3 via trigger of input 1 or WET input input 2 operation dependent upon input 4 ('day / night mode')
00	disable	<ul style="list-style-type: none"> 8310-845 disabled 00 is the default setting and has no assigned function


PARAMETERS

PARAMETER	DESCRIPTION	LOGIC
<i>h1</i>	relay 1 hold time	00 – 60 seconds countdown begins AFTER release of input 1 or WET input
<i>h2</i>	relay 2 hold time	00 – 60 seconds countdown begins AFTER d1 (delay between relay 1 & relay 2) expires
<i>h3</i>	relay 3 hold time	00 – 60 seconds countdown begins AFTER d2 (delay between relay 1 & relay 3) expires
<i>d1</i>	delay between relay 1 & relay 2	00 – 60, _1 (1/4), _2 (1/2), _3 (3/4) seconds delay begins AT activation of input 1 or WET input
<i>d2</i>	delay between relay 1 & relay 3	00 – 60, _1 (1/4), _2 (1/2), _3 (3/4) seconds delay begins AT activation of input 1 or WET input
<i>rL</i>	reverse logic	00 = normal logic input 1 trigger must be NO and close its contact to trigger 01 = reverse logic input 1 trigger must be NC and open its contact to trigger
<i>nP</i>	no parameters	no parameters available for selected function

PROGRAMMING




Press and hold INCR + FUNC for 3 seconds.




Display will toggle between FF and 00 for 5 seconds.^{1,2}




While FF / 00 is displayed, press INCR to cycle through functions.




Once desired function is selected, press FUNC to cycle through parameters.




Display will toggle between parameter and its current value for 5 seconds.




Press³ INCR to cycle through parameter's values.



Repeat steps 4-7 until all function parameters are set.



Wait 5 seconds for 8310-845 to save and display function.


 Relay hold time(s) and delay time(s) **MUST** be set for any relay that is to be utilized.
Ex: For function 36, if using only relay 1, h1 must be set...if using relay 1 and relay 2, h1, h2, and d1 must be set.

NOTES:

1. Function 00 disables the 8310-845.
2. “nP” means no parameters are applicable for the selected function.
3. Pressing and holding INCR will rapid cycle.

PROGRAMMING PARAMETERS

* see page 3 for specific parameter details *

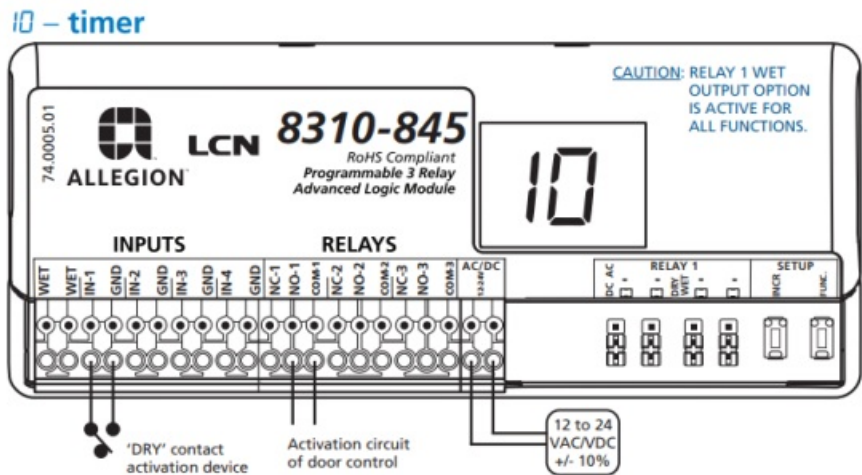

AVAILABLE PARAMETERS:


h1 – relay 1 hold time

rL – reverse logic

1. Trigger INPUT 1.

- RELAY 1 will close and hold for time h1.

FUNCTION **10** NOTE: Reverse logic allows for a Normally Closed (NC) INPUT 1.

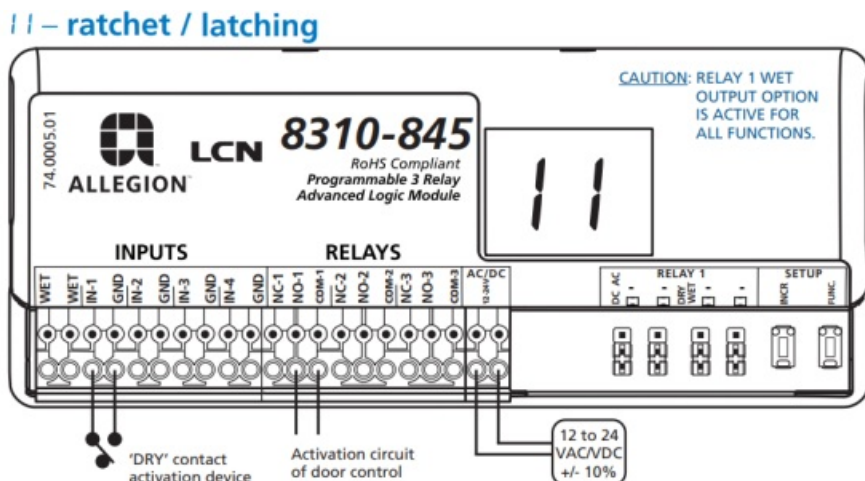

AVAILABLE PARAMETERS:

NONE


1. Trigger INPUT 1.

- RELAY 1 will close and hold indefinitely.

2. Trigger INPUT 1.

- RELAY 1 will open.

22 – 2-relay sequencer + inhibitor

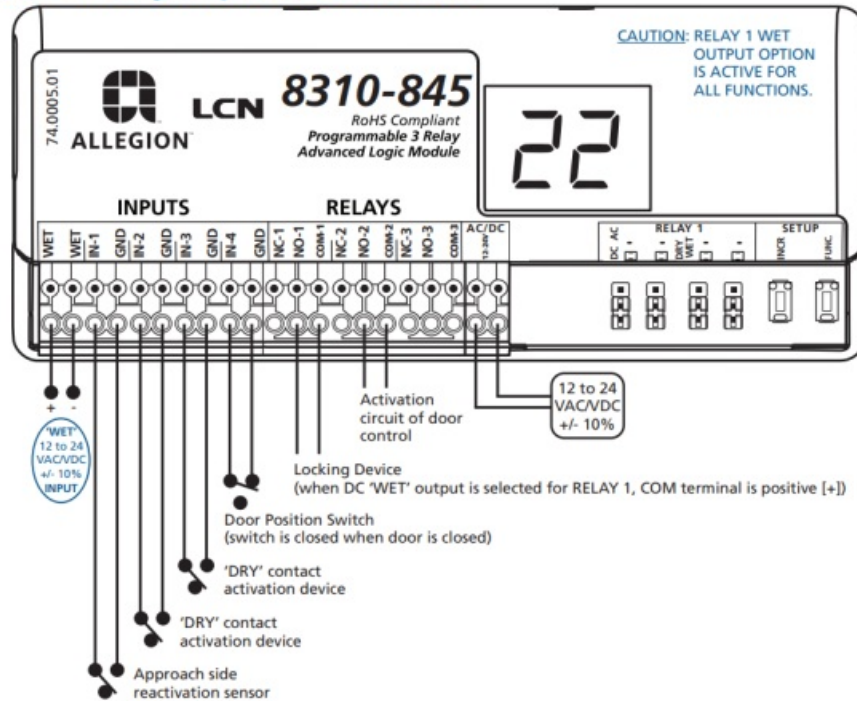

AVAILABLE PARAMETERS:

$h1$ – relay 1 hold time

$h2$ – relay 2 hold time

$d1$ – delay between relays 1 & 2


$h1$ must be greater than $d1$ when using an electric lock

1. Trigger INPUT 2, 3, or 'WET'.

- RELAY 1 will close and hold for time $h1$.
- RELAY 2 will close after time delay $d1$ and hold for time $h2$.

FUNCTION 22 NOTE: Ensure INPUT 1 does not initiate the sequence and that INPUT 4 is closed when the door is closed.

28 – 2-relay sequencer + door position

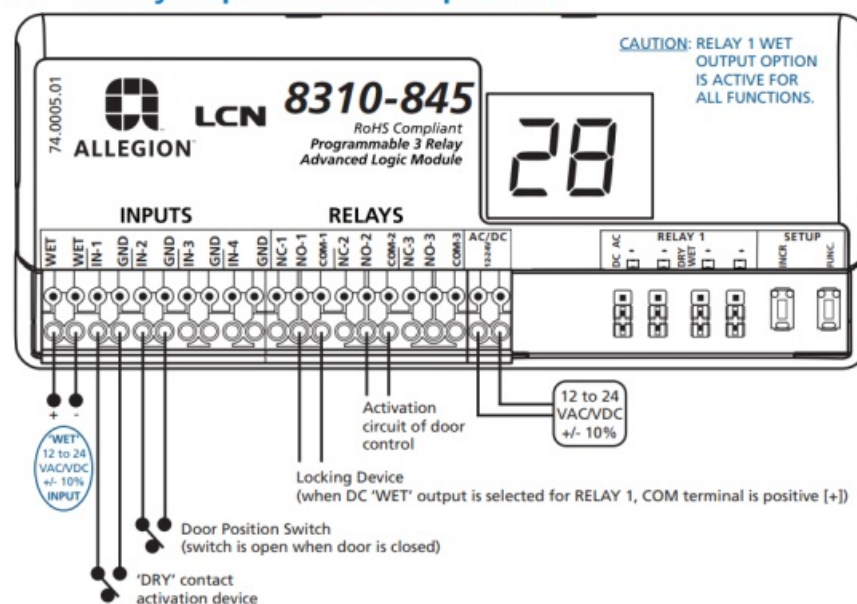

AVAILABLE PARAMETERS:

$h1$ – relay 1 hold time

$h2$ – relay 2 hold time

$d1$ – delay between relays 1 & 2


$h1$ must be greater than $d1$ when using an electric lock

1. Trigger INPUT 1 or 'WET'.

- RELAY 1 will close and hold for time $h1$.
- RELAY 2 will close after time delay $d1$ and hold for time $h2$.

FUNCTION **28** NOTE: INPUT 2 allows the delay to run when the contact is open but triggers RELAY 2 immediately when the contact is closed.

29 – deactivation timer

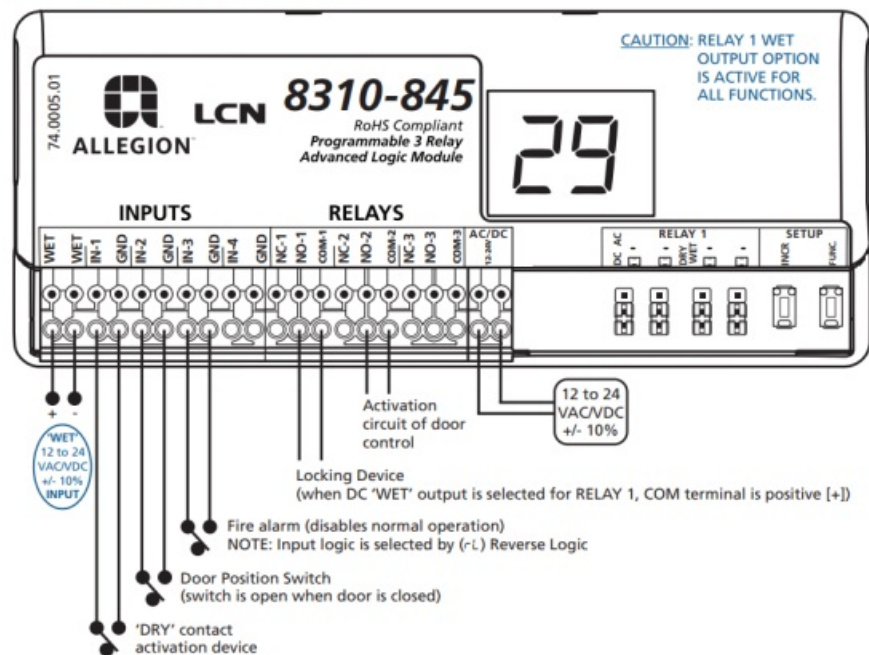

AVAILABLE PARAMETERS:

$h1$ – relay 1 hold time

$h2$ – relay 2 hold time

$d1$ – delay between relays 1 & 2

rL – reverse logic


$h1$ must be greater than $d1$ when using an electric lock

1. Trigger INPUT 1 or 'WET'.

- RELAY 1 will close and hold for time $h1$.
- RELAY 2 will close after time delay $d1$ and hold for time $h2$.

FUNCTION **29** NOTE: INPUT 2 deactivates RELAY 1 once INPUT 2 is opened (and after the sequence has run). INPUT 2 allows the delay to run when the contact is open, but triggers RELAY 2 immediately when the contact is closed. INPUT 3 disables the sequence.

36 – 3-relay sequencer + '1-shot'

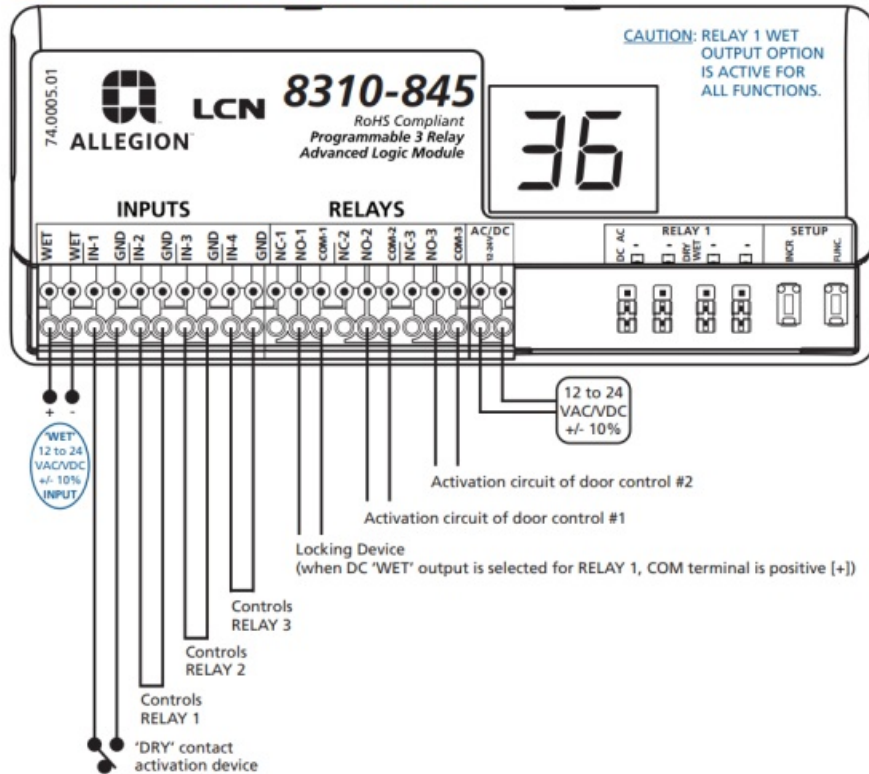

AVAILABLE PARAMETERS:


- $h1$ – relay 1 hold time
- $h2$ – relay 2 hold time
- $h3$ – relay 3 hold time
- $d1$ – delay between relays 1 & 2
- $d2$ – delay between relays 1 & 3
- $h1$ must be greater than $d1$ when using an electric lock

1. Trigger INPUT 1 or 'WET'.

- RELAY 1 will close and hold for time $h1$.
- RELAY 2 will close after time delay $d1$ and hold for time $h2$.
- RELAY 3 will close after time delay $d2$ and hold for time $h3$.

FUNCTION **36** **NOTE:** If INPUT 1 or 'WET' is maintained, jumping INPUT 2, 3, and/or 4 will allow RELAY 1, 2, and/or 3 (respectively) to close, run the hold time and then open. If no jumpers are set, RELAYS 1, 2, and/or 3 will close, hold and not time out (open, i.e. 1-shot) until INPUT 1 or 'WET' is released.

37 – 3-relay sequence with 'independent relay'

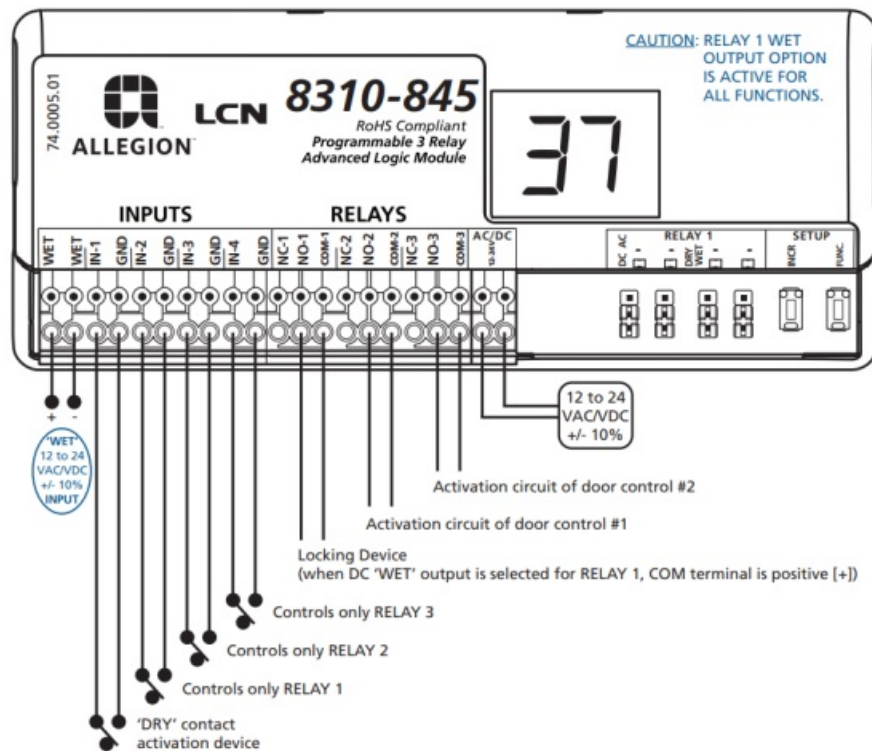


AVAILABLE PARAMETERS:

- $h1$ – relay 1 hold time
- $h2$ – relay 2 hold time
- $h3$ – relay 3 hold time
- $d1$ – delay between relays 1 & 2
- $d2$ – delay between relays 1 & 3

$h1$ must be greater than $d1$ when using an electric lock

1. Trigger INPUT 1 or 'WET'.
 - RELAY 1 will close and hold for time $h1$.
 - RELAY 2 will close after time delay $d1$ and hold for time $h2$.
 - RELAY 3 will close after time delay $d2$ and hold for time $h3$.
2. Trigger INPUT 2.
 - RELAY 1 will close and hold for time $h1$.
3. Trigger INPUT 3.
 - RELAY 2 will close and hold for time $h2$.
4. Trigger INPUT 4.
 - RELAY 3 will close and hold for time $h3$.

50 – interlock timer

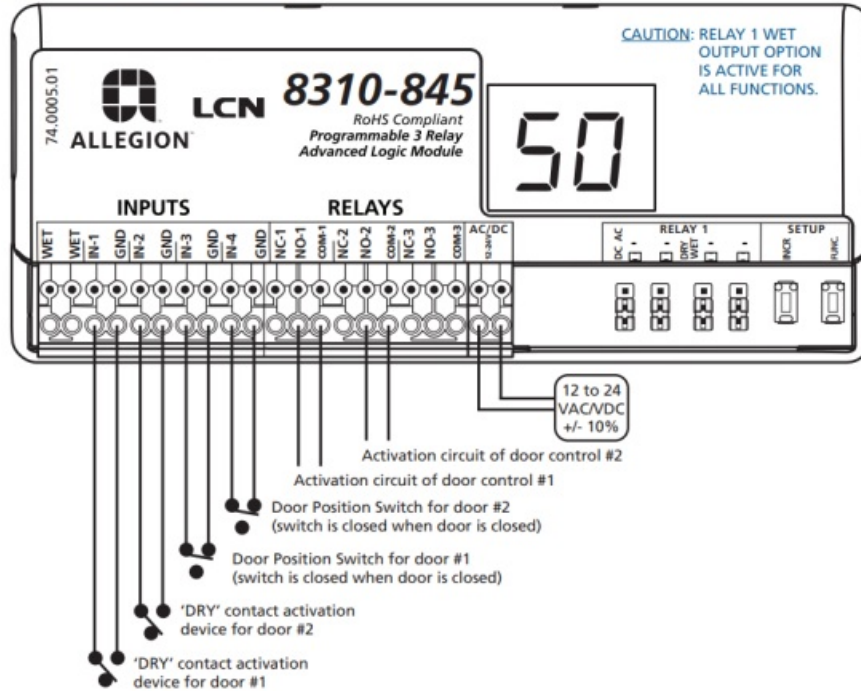

AVAILABLE PARAMETERS:

$h1$ – relay 1 hold time

$h2$ – relay 2 hold time

1. Trigger INPUT 1.


- RELAY 1 will close and hold for time $h1$.

2. Trigger INPUT 2.

- RELAY 2 will close and hold for time $h2$.

FUNCTION 50 NOTE: If INPUT 1 is triggered, INPUT 2 and RELAY 2 will be inhibited until INPUT 3 (door position switch) is closed. Conversely, if INPUT 2 is triggered, INPUT 1 and RELAY 1 will be inhibited until INPUT 4 (door position switch) is closed.

55 – interlock ratchet / latching

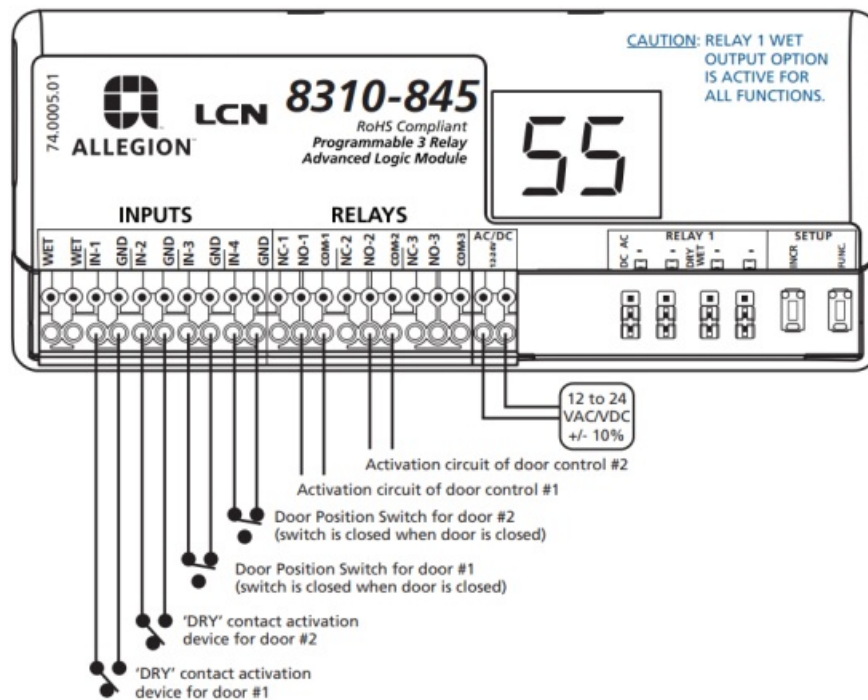

AVAILABLE PARAMETERS: NONE

1. Trigger INPUT 1.
 - RELAY 1 will close and hold until indefinitely.
2. Trigger INPUT 1.
 - RELAY 1 will open.
3. Trigger INPUT 2.
 - RELAY 2 will close and hold indefinitely.
4. Trigger INPUT 2.
 - RELAY 2 open.

FUNCTION **55** NOTE: If INPUT 1 is triggered, INPUT 2 and RELAY 2 will be inhibited until INPUT 3 (door position switch) is closed. Conversely, if INPUT 2 is triggered, INPUT 1 and RELAY 1 will be inhibited until INPUT 4 (door position switch) is closed.

74.0005.01

ALLEGION **LCN** **8310-845**
RoHS Compliant
Programmable 3 Relay
Advanced Logic Module

CAUTION: RELAY 1 WET
OUTPUT OPTION
IS ACTIVE FOR
ALL FUNCTIONS.

INPUTS

RELAYS

WET WET-1 IN-2 GND IN-3 GND IN-4 GND NC-1 NO-1 COM-1 NC-2 NO-2 COM-2 NC-3 NO-3 COM-3 AC/DC

DC AC RELAY 1 RELAY 2 RELAY 3 SETUP

12 to 24
VAC/VDC
+/- 10%

Activation circuit of door control #2

Activation circuit of door control #1

'DRY' contact activation device (vestibule for door #2)

'DRY' contact activation device (vestibule for door #1)


'DRY' contact activation device for door #2

'DRY' contact activation device for door #1

- h_1 – relay 1 hold time
- h_2 – relay 2 hold time
- d_1 – delay between relays 1 & 2
- d_2 – delay between relays 2 & 1

1. Trigger INPUT 1.
 - RELAY 1 will close and hold for time $h1$.
 - RELAY 2 will close after time delay $d1$ and hold for time $h2$.
2. Trigger INPUT 2.
 - RELAY 2 will close and hold for time $h2$.
 - RELAY 1 will close after time delay $d2$ and hold for time $h1$.
3. Trigger INPUT 3.
 - RELAY 1 will close and hold for time $h1$.
4. Trigger INPUT 4.
 - RELAY 2 will close and hold for time $h2$.

nL – normally locked restroom

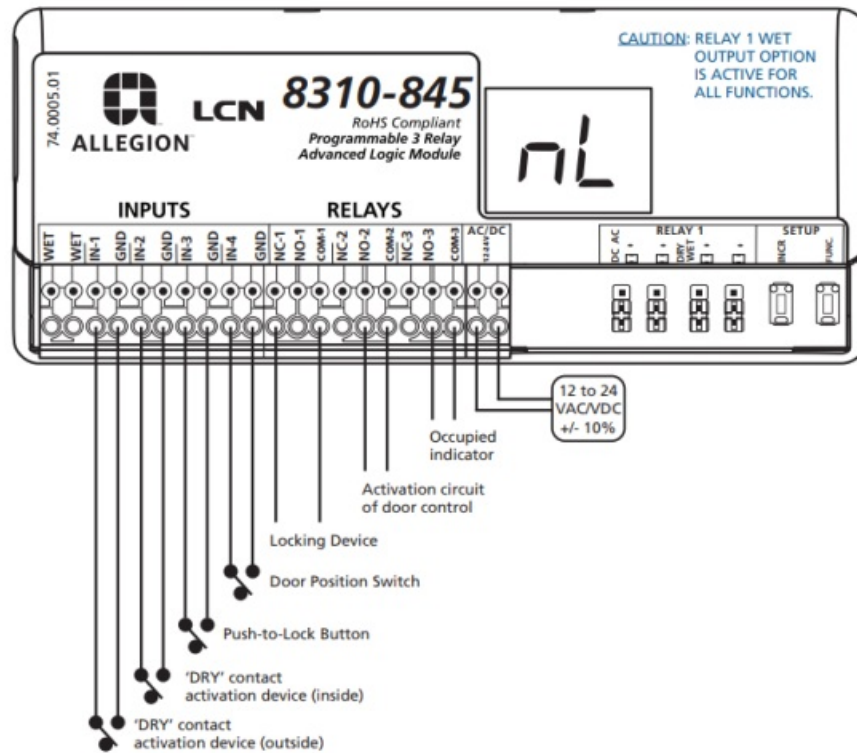

AVAILABLE PARAMETERS:

$h1$ – relay 1 hold time

$h2$ – relay 2 hold time

$d1$ – delay between relays 1 & 2

$h1$ must be greater than $d1$

1. Trigger INPUT 1.

- RELAY 1 will close and hold for time $h1$.
- RELAY 2 will close after time delay $d1$ and hold for time $h2$.

2. Trigger INPUT 3.


- RELAY 3 will close and INPUT 1 will be inhibited.

3. Trigger INPUT 2.

- RELAY 1 will close and hold for time $h1$.
- RELAY 2 will close after time delay $d1$ and hold for time $h2$.
- RELAY 3 will open.

FUNCTION nL NOTE: INPUT 3 will not function unless INPUT 4 is closed. INPUT 4 should be closed when door is closed.

nu – normally unlocked restroom

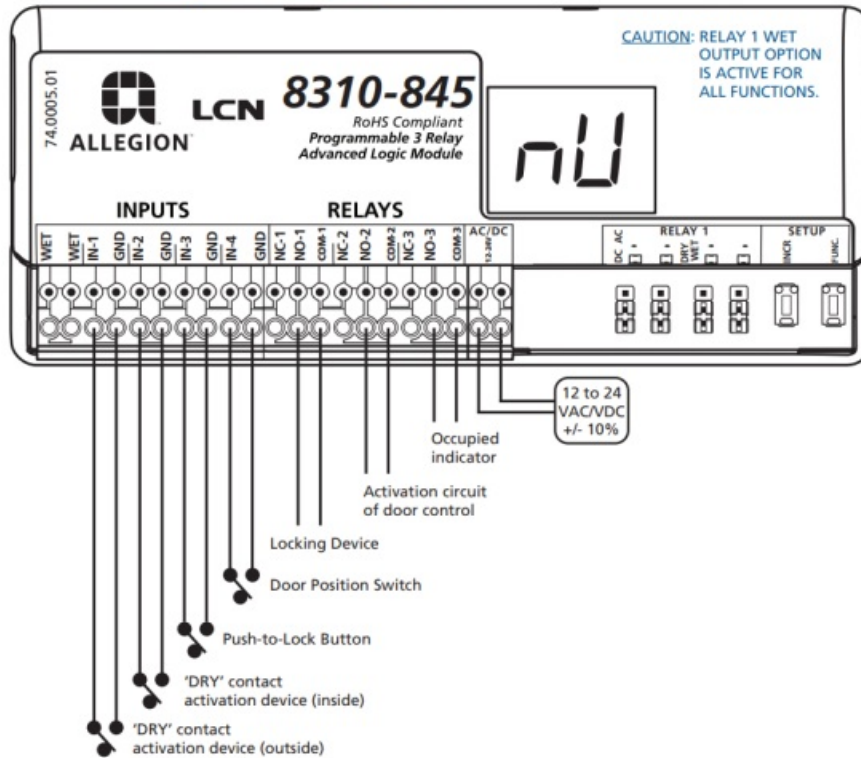

AVAILABLE PARAMETERS:

h2 – relay 2 hold time

d1 – delay between relays 1 & 2

1. Trigger INPUT 1.

- RELAY 2 will close and hold for time **h2**.

2. Trigger INPUT 3.


- RELAY 1 and 3 will close and INPUT 1 will be inhibited.

3. Trigger INPUT 2.

- RELAY 1 will open.
- RELAY 2 will close after time delay **d1** and hold for time **h2**.
- RELAY 3 will open.

FUNCTION **nu** NOTE: INPUT 3 will not function unless INPUT 4 is closed. INPUT 4 should be closed when door is closed.

dn – 3-relay sequence with 'day / night mode'

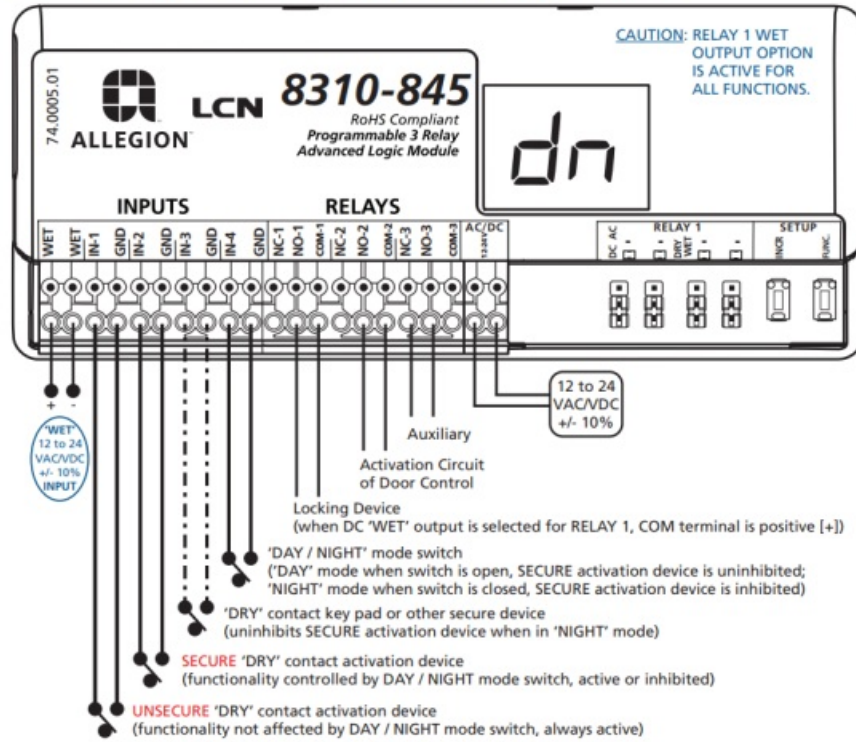

AVAILABLE PARAMETERS:

- $h1$ – relay 1 hold time
- $h2$ – relay 2 hold time
- $h3$ – relay 3 hold time
- $d1$ – delay between relays 1 & 2
- $d2$ – delay between relays 1 & 3

1. Trigger INPUT 1, INPUT 2, or 'WET'.
 - RELAY 1 will close and hold for time $h1$.
 - RELAY 2 will close after time delay $d1$ and hold for time $h2$.
 - RELAY 3 will close after time delay $d2$ and hold for time $h3$.
2. Trigger INPUT 3.
 - RELAY 1 will close and hold for time $h1$.
 - INPUT 2 will be uninhibited for 5 seconds.

FUNCTION **dn** NOTE: INPUT 2 will only function if INPUT 4 is open.

TEST

Upon completion of jumper settings, wiring, and programming, test the 8310-845 to ensure all function parameters are working correctly and as intended for the specific application.

RELAY STATUS

STATUS	DESCRIPTION
$r1$	relay 1 closed when wired NO or open when wired NC
$r2$	relay 2 closed when wired NO or open when wired NC
$r3$	relay 3 closed when wired NO or open when wired NC
$r=$	relay 1 and relay 2 closed when wired NO or open when wired NC
$r\equiv$	relay 1 and relay 3 closed when wired NO or open when wired NC
$r\equiv$	relay 1, relay 2, and relay 3 closed when wired NO or open when wired NC

FUNCTION CROSS REFERENCE

BR3 FUNCTION	BR3-X FUNCTION
21	22
25	$28, 29, 36, \text{ or } 37$
35	$36 \text{ or } 37$
75	$28, 29, 36, \text{ or } 37$

TROUBLESHOOTING

8310-845 will not react to any inputs	Incorrect power	Verify power supply of 12 – 24 VAC/VDC $\pm 10\%$ is wired to correct terminals
	Not programmed	Ensure a function is programmed, 8310-845 does not show 00, and all 'h' values are set to at least 01
	Incorrect wiring	Verify wiring is applied exactly as described for specific function programmed
	Defective	Replace
8310-845 has no output	Incorrect output devices	Ensure proper devices are connected to outputs for the specific function programmed
	Not programmed	Ensure a function is programmed, 8310-845 does not show 00, and all 'h' values are set to at least 01
	Incorrect wiring	Verify wiring is applied exactly as described for specific function programmed
	Incorrect jumper settings	Ensure all jumpers are configured correctly for specific application
	Defective	Replace
Output is constant/maintained	One or more of IN-1 through IN-4 have shorted	Resolve respective short
E1, E2, E3, E4, E5	EEPROM error	Reset and reprogram

TECHNICAL SPECIFICATIONS

Supply Voltage	12 – 24 VAC/VDC $\pm 10\%$
Current Consumption	30 – 130 mA (DRY output)
Temperature Rating	-15 – 150 °F (-26 – 150 °C) If powered by AC voltage and using WET output to convert to DC voltage and current draw of device is greater than 0.9 A, the upper temperature range is 130 °F (54 °C)
Input Input 1, 2, 3, 4 WET input	DRY contact 5 – 24 VAC/VDC $\pm 10\%$
Contact Rating Relay 1 (DRY) Relay 1 (WET) Relay 2 Relay 3	3 A @ 24 VAC or 30 VDC 1 A 3 A @ 24 VAC or 30 VDC 1 A @ 24 VAC or 30 VDC
Dimensions	5.2" x 2.2" x 1" (133 mm x 55 mm x 25 mm)
Housing	ABS – white translucent

Specifications are subject to change without prior notice.
All values measured in specific conditions.

INSTALLATION/SERVICE COMPLIANCE EXPECTATIONS

The sensor manufacturer cannot be held responsible for incorrect installations or incorrect adjustments of the sensor/device; therefore, the sensor manufacturer does not guarantee any use of the sensor/device outside of its intended purpose.

The sensor manufacturer strongly recommends that installation and service technicians be AAADM-certified for pedestrian doors, IDA-certified for doors/gates, and factory-trained for the type of door/gate system.

Installers and service personnel are responsible for executing a risk assessment following each installation/service performed, ensuring that the sensor/device system performance is compliant with local, national, and international regulations, codes, and standards.

Once installation or service work is complete, a safety inspection of the door/gate shall be performed per the door/gate manufacturer's recommendations and/or per AAADM/ANSI/DASMA guidelines (where applicable) for best industry practices. Safety inspections must be performed during each service call – examples of these safety inspections can be found on an AAADM safety information label (e.g. ANSI/DASMA 102, ANSI/DASMA 107 , UL294, UL325, and International Building Code).

Verify that all appropriate industry signage, warning labels, and placards are in place.



Do not leave problems unresolved. If a satisfactory solution cannot be achieved after troubleshooting a problem, please contact Allegion at 1-[877-671-7011](tel:877-671-7011). If you must wait for the following workday to call Allegion, leave the door inoperable until satisfactory repairs can be made. Never sacrifice the safe operation of the automatic door or gate for an incomplete solution.



Original Instructions | PLEASE KEEP FOR FURTHER USE – DESIGNED FOR COLOR PRINTING
For more information, visit www.allegion.com.

Documents / Resources



[ALLEGION 8310-845 Programmable 3-Relay Advanced Logic Module and Restroom Controller \[pdf\] Instruction Manual](#)

8310-845, 8310-845 Programmable 3-Relay Advanced Logic Module and Restroom Controller, Programmable 3-Relay Advanced Logic Module and Restroom Controller, 3-Relay Advanced Logic Module and Restroom Controller, Logic Module and Restroom Controller, Module and Restroom Controller, Restroom Controller

References

- [User Manual](#)

[Manuals+ Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.