

ALLEGRO MICRO CT100LW-HS6 Evaluation Board Owner's Manual

[Home](#) » [ALLEGRO MICRO](#) » ALLEGRO MICRO CT100LW-HS6 Evaluation Board Owner's Manual 



CT100LW-HS6 EVB102 SOT23-6 Evaluation Board User Guide

Contents

- [1 DESCRIPTION](#)
- [2 FEATURES](#)
- [3 USING THE EVALUATION BOARD](#)
- [4 SCHEMATIC](#)
- [5 LAYOUT](#)
- [6 BILL OF MATERIALS](#)
- [7 RELATED LINKS](#)
- [8 Revision History](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)

DESCRIPTION

The CT100 is a 1D linear sensor in full-bridge configuration from Allegro developed on its patented XtremeSense™ TMR technology. The total magnetic field range for the CT100 is from -50 mT to 50 mT , providing XtremeSense performance to achieve unparalleled temperature stability across the full temperature range. The device supports a wide operating voltage range of 1.0 to 5.5 V. The EVB102 SOT23-6 has applications for linear measurements, proximity sensing, and current sensing. This user guide describes how to connect and use the EVB102 SOT23-6 evaluation board.

FEATURES

- Operating magnetic field range ± 50 mT
- Stable magnetic performance over temperature
- Differential outputs
- Supply Voltage: 1.0 V to 5.5 V
- Operating temperature: -40°C to 150°C

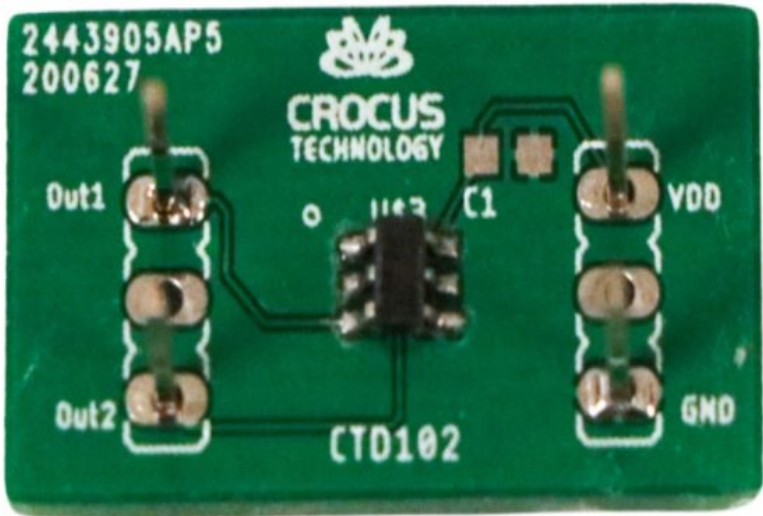


Figure 1: EVB102 SOT23-6 Evaluation Board

Table 1: EVB102 SOT23-6 Evaluation Board Configurations

Configuration Name	Part Number	Output Voltage Range (mV)	Output Current Range (mV)
EVB102 SOT23-6	CT100LW-HS6	± 1430	0–200

Table 2: General Specifications

Specification	Min.	Typ.	Max	Units
Input Operating Voltage	2.7	–	5	V
Input Operating Temperature	-5.0	–	5	A
Cutoff Frequency (3 dB)	–	10	–	kHz

USING THE EVALUATION BOARD

This section provides an overview of the connections and configuration options of the EVB102 SOT23-6 evaluation board. Figure 2 highlights the proper configuration and is detailed below. The CT100 datasheet contains detailed information on the use and functionality of each pin, detailed specifications about the sensor, and should be consulted for more detailed information than is contained in this user guide.

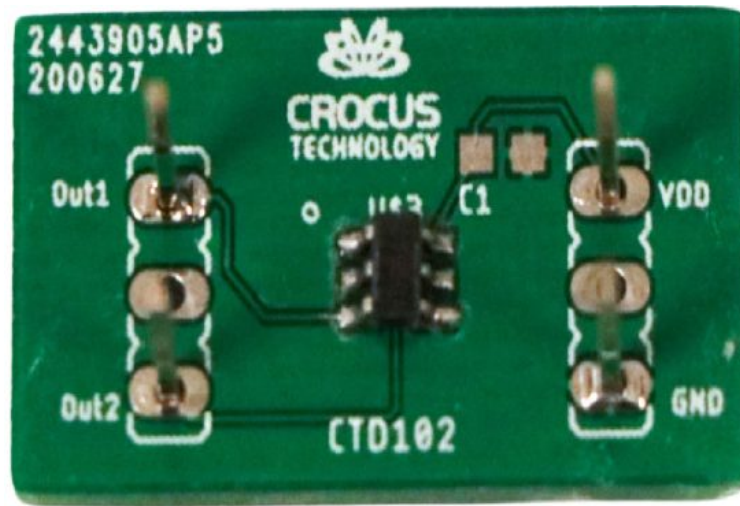


Figure 2: EVB102 SOT23-6 Evaluation Board

Power Input and Board Configuration

Connect the power supply to VDD and GND. Apply voltage not exceeding 5.5 VDC. Apply 3.3 VDC to VDD and GND for general use. Attach a multimeter to OUT1 and OUT2. Steadily pass the magnet over the IC to obtain a reading; the output should read 0 mV to 200 mV. Allow the magnet to travel from VDD over to GND. The current output should immediately rise and then decline when it reaches GND. Use short cables that are at least 18 AWG.

SCHEMATIC

Figure 3 below shows the schematic of the EVB102 SOT23-6 evaluation board.

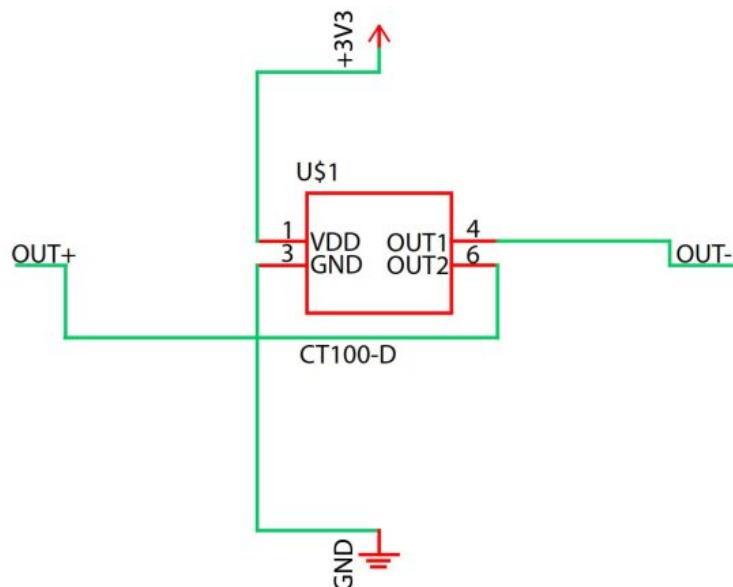


Figure 3: EVB102 SOT23-6 evaluation board schematic

LAYOUT

Figures 4 and 5 below show the top and bottom layers of the EVB102 SOT23-6 evaluation board.

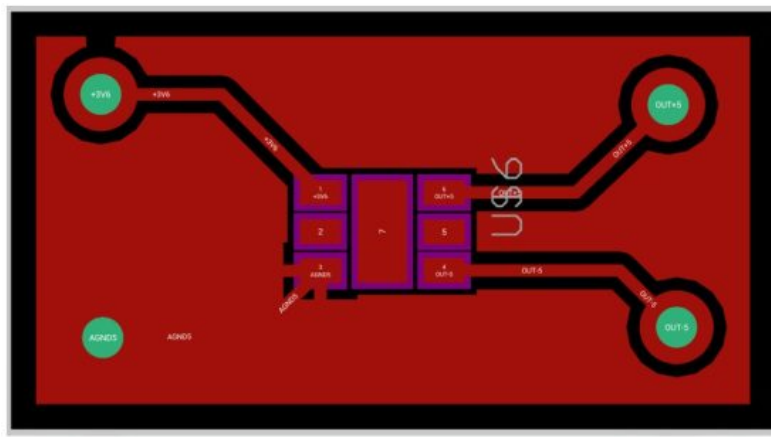


Figure 4: EVB102 SOT23-6 evaluation board top layer

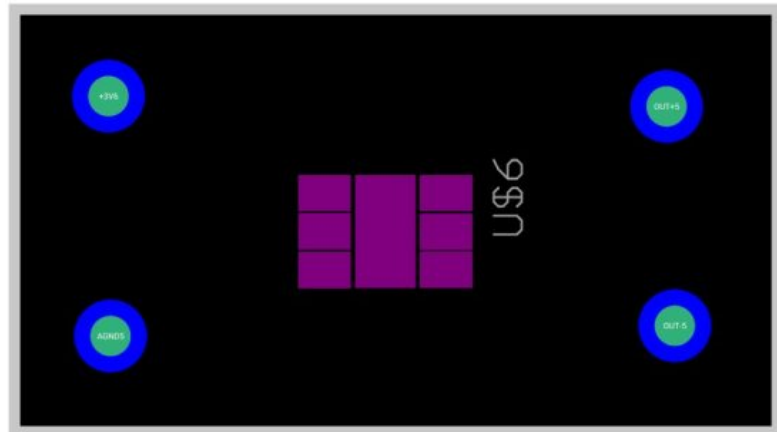


Figure 5: EVB102 SOT23-6 evaluation board bottom layer

BILL OF MATERIALS

Table 3: CT100LW-HS6 Evaluation Board Bill of Materials
ELECTRICAL COMPONENTS

Designator	Quantity	Description	Manufacturer	Manufacturer Part Number
PCB	1	EVB102 SOT23-6 EVAL PCB	Allegro MicroSystems	—
U\$6	1	CT100 Sensor	Allegro MicroSystems	—
J1, J2, J3, J4	4	Header, vertical, through-hole	TE	9-146285-0-01

RELATED LINKS

<https://www.allegromicro.com/en/products/sense/linear-and-angular-position/linear-position-sensors/ct100>

Revision History

Number	Date	Description
—	27-Sep-24	Initial release

Copyright 2024, Allegro MicroSystems.

Allegro MicroSystems reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Before placing an order, the user is cautioned to verify that the information being relied upon is current.


Allegro’s products are not to be used in any devices or systems, including but not limited to life support devices or systems, in which a failure of Allegro’s product can reasonably be expected to cause bodily harm.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

Copies of this document are considered uncontrolled documents.



Documents / Resources

	ALLEGRO MICRO CT100LW-HS6 Evaluation Board [pdf] Owner's Manual CT100LW-HS6, EVB102-SOT23-6, CT100LW-HS6 Evaluation Board, CT100LW-HS6, Evaluation Board, Board
--	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.