



ACURITE 00888 Thermometer with Probe Instruction Manual

[Home](#) » [Acurite](#) » ACURITE 00888 Thermometer with Probe Instruction Manual 



Instruction Manual Thermometer with Probe model 00888

Congratulations on your new AcuRite product. To ensure the best possible product performance, please read this manual in its entirety and retain it for future reference.

Unpacking Instructions

Remove the protective film that is applied to the LCD screen prior to using this product. Locate the tab and peel it off to remove it.


Package Contents

1. Display unit
2. Instruction Manual

Contents

- [1 Features & Benefits](#)
- [2 DISPLAY](#)
- [3 SETUP](#)
- [4 OPERATION](#)
- [5 Specifications](#)
- [6 Troubleshooting](#)
- [7 Limited One Year Warranty](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

Features & Benefits

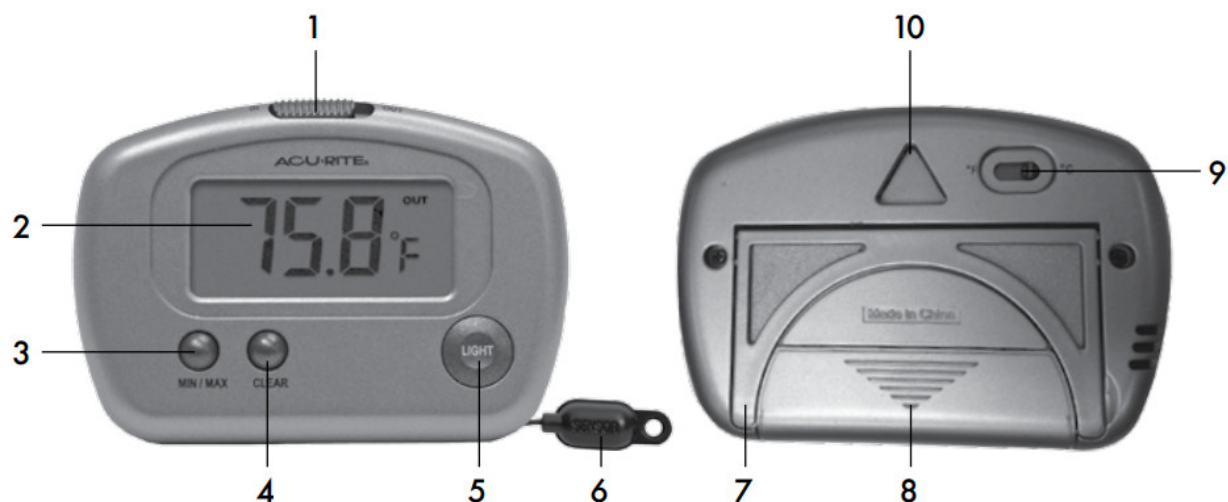

DISPLAY

1. IN/OUT Switch

Slide to view current indoor (display) temperature or current outdoor (probe) temperature.

2. Current Temperature

3. MIN/MAX Button

Displays high & low records.

4. CLEAR Button

5. LIGHT Button

Activates momentary backlight.

6. Probe Temperature Sensor

7. Fold-out Tabletop Stand

8. Battery Compartment

9. °F/°C Switch

Slide to select °F or °C temperature units.


10. Integrated Hang Hole

For easy placement.

SETUP

Install or Replace Battery

AcuRite recommends high-quality alkaline batteries for the best product performance. Heavy duty or rechargeable batteries are not recommended.

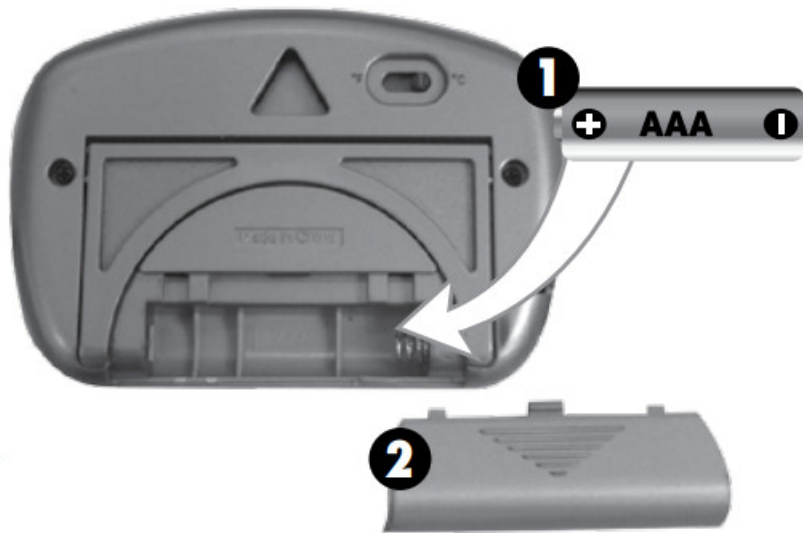

1. The slide battery compartment covers off and installs 1 fresh “AAA” battery. Follow the polarity (+/-) diagram.
2. Replace the battery cover.



PLEASE DISPOSE OF OLD OR DEFECTIVE BATTERIES IN AN ENVIRONMENTALLY SAFE WAY AND IN ACCORDANCE WITH YOUR LOCAL LAWS AND REGULATIONS.

BATTERY SAFETY: Clean the battery contacts and also those of the device prior to battery installation. Remove batteries from equipment that is not to be used for an extended period of time. Follow the polarity (+/-) diagram in the battery compartment. Promptly remove dead batteries from the device. Dispose of used batteries properly. Only batteries of the same or equivalent type as recommended are to be used. DO NOT incinerate used batteries. DO NOT dispose of batteries in fire, as batteries may explode or leak. DO NOT mix old and new batteries or types of batteries (alkaline/standard). DO NOT use rechargeable batteries. DO NOT recharge non-rechargeable batteries. DO NOT short-circuit the supply terminals.

OPERATION

Placement for Maximum Accuracy

AcuRite sensors are sensitive to surrounding environmental conditions. Proper placement of both the display unit and temperature probe are critical to the accuracy and performance of this product.

Display Unit & Probe Placement

Place the display unit in a dry area free of dirt and dust. The display unit stands upright for tabletop use or is wall-mountable.

To observe outdoor temperatures, the wired temperature probe must be placed outside. The probe sensor can be securely mounted to a surface utilizing the adhesive pad or the integrated hang hole. Take care not to damage the sensor during mounting.

Important Placement Guidelines

To ensure accurate temperature measurement, place units out of direct sunlight and away from heat sources or vents.

The wired temperature probe is not waterproof and is not intended for permanent submersion in liquids. Submersion in liquid for more than 30 seconds may result in the complete failure of the probe.

High & Low Records

High and low values are recorded for display (indoor) and probe (outdoor) temperature. High and low records reflect the minimum and maximum temperature recorded since the unit was powered on since the battery was changed, or since it was manually reset (whichever was most recent).

To view the HIGH-temperature record, press and release the “MIN/MAX” button. The “MAX” icon appears on the display next to the high records. To view the LOW-temperature record, press and release the “MIN/MAX” button twice. The “MIN” icon appears on the display next to the low records.

To reset the LOW records, press the “CLEAR” button while viewing the low records. Dashes will display to confirm low values have been cleared.

To reset the HIGH records, press the “CLEAR” button while viewing the high records. Dashes will display to confirm high values have been cleared.

Specifications

TEMPERATURE RANGE	Display: -4°F to 122°F; -20°C to 50°C Probe: -40°F to 158°F; -40°C to 70°C
POWER	Display: 1 x AAA alkaline battery

Troubleshooting

Inaccurate temperature	· Make sure both the display unit and sensor are placed out of direct sunlight and away from any heat sources or vents (see page 2).
Display screen not working	· Check that the battery is installed correctly. The battery may need to be replaced.

FCC Information

This device complies with part 15 of FCC rules. Operation is subject to the following two conditions:

- This device may NOT cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

Customer Support

AcuRite customer support is committed to providing you with best-in-class service. **For assistance**, please have the model number of this product available and contact us in any of the following ways:



(877) 221-1252



info@chaney-inst.com

- ▶ Installation Videos
- ▶ Register your Product
- ▶ Instruction Manuals
- ▶ Support User Forum
- ▶ Replacement Parts
- ▶ Submit Feedback & Ideas



Limited One Year Warranty

At AcuRite, we proudly uphold our commitment to quality technology. Chaney Instrument Co. warrants that all products it manufactures be of good material and workmanship and to be free of defects when properly installed and operated for a period of one year from the date of purchase. We recommend that you visit us at www.AcuRite.com for the fastest way to register your product. However, product registration does not eliminate the need to retain your original proof of purchase in order to obtain warranty benefits.

Chaney Instrument Co. warrants that all products it manufactures to be of good material and workmanship and to be free of defects when properly installed and operated for a period of one year from the date of purchase. Remedy for breach of this warranty is limited to repair or replacement of the defective item(s). Any product which, under normal use and service, is proven to breach the warranty contained herein within ONE YEAR from date of sale will, upon examination by Chaney, and at its sole option, be repaired or replaced by Chaney. Transportation costs and charges for returned goods shall be paid for by the purchaser. Chaney hereby disclaims all responsibility for such transportation costs and charges. This warranty will not be breached, and Chaney will give no credit for products it manufactures which have received normal wear and tear, been damaged (including by acts of nature), tampered, abused, improperly installed, damaged in shipping, or repaired or altered by others than authorized representatives of Chaney.

The above-described warranty is expressly in lieu of all other warranties, express or implied, and all other warranties are hereby expressly disclaimed, including without limitation the implied warranty of merchantability and the implied warranty of fitness for a particular purpose. Chaney expressly disclaims all liability for special, consequential or incidental damages, whether arising in tort or by contract from any breach of this warranty. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Chaney further disclaims all liability from personal injury relating to its products to the extent permitted by law. By acceptance of any of Chaney's products, the purchaser assumes all liability for the consequences arising from their use or misuse. No person, firm, or corporation is authorized to assume for Chaney any other liability in connection with the sale of its products. Furthermore, no person, firm, or corporation is authorized to modify or waive the terms of this paragraph, and the preceding paragraph, unless done in writing and signed by a duly authorized agent of Chaney. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

For in-warranty claims:

Chaney Instrument Co. | 965 Wells St. | Lake Geneva, WI 53147



It's more than accurate, it's AcuRite offers an extensive assortment of precision instruments, designed to provide

you with information you can depend on to Plan your day with confidence™.

www.AcuRite.com


Printed in China

00888 INST 072314

©Chaney Instrument Co. All rights reserved. AcuRite is a registered trademark of the Chaney Instrument Co., Lake Geneva, WI 53147. All other trademarks and copyrights are the property of their respective owners. AcuRite uses patented technology.

Visit www.AcuRite.com/patents for details.

Documents / Resources

	<p>ACURITE 00888 Thermometer with Probe [pdf] Instruction Manual 00888, Thermometer with Probe</p>
---	--

References

- [Home -](#)
- [AcuRite Weather Monitoring | #1 Weather Station Brand in North America](#)
- [Patented Technology | AcuRite](#)