


Adafruit MCP9808 Precision I2C Temperature Sensor User Guide

[Home](#) » [adafruit](#) » Adafruit MCP9808 Precision I2C Temperature Sensor User Guide 



Adafruit MCP9808 Precision I2C Temperature Sensor Guide
Created by lady ADA

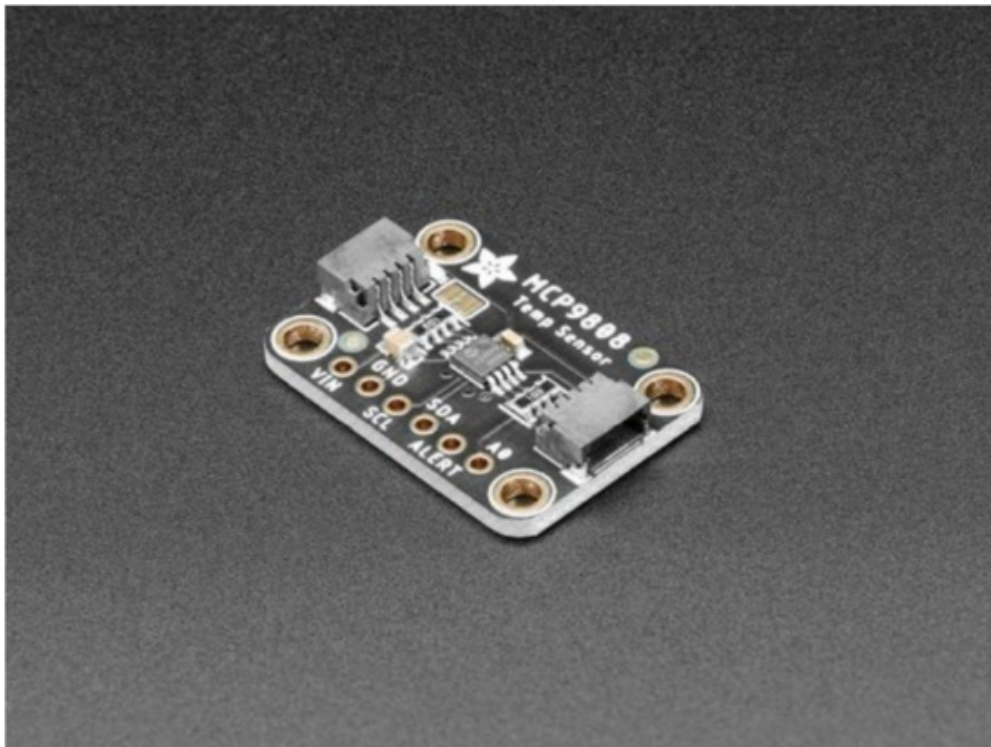


Last updated on 2021-06-23 01:04:33 PM EDT


Contents

- [1 Overview](#)
- [2 Power Pins](#)
- [3 I2C Data Pins](#)
- [4 Optional Pins](#)
- [5 Arduino Code](#)
- [6 Download Adafruit_MCP9808](#)
- [7 Load Demo](#)
- [8 Python & CircuitPython](#)
- [9 CircuitPython Microcontroller Wiring](#)
- [10 Python Computer Wiring](#)
- [11 CircuitPython Installation of MCP9808 Library](#)
- [12 Python Installation of MCP9808 Library](#)
- [13 CircuitPython & Python Usage](#)
- [14 Full Example Code](#)
- [15 Python Docs](#)
- [16 Downloads](#)
- [17 Schematic and Fab Print for STEMMMA QT Version](#)
- [18 Schematic and Fab Print for Original Version](#)
- [19 Documents / Resources](#)
 - [19.1 References](#)
- [20 Related Posts](#)


Overview

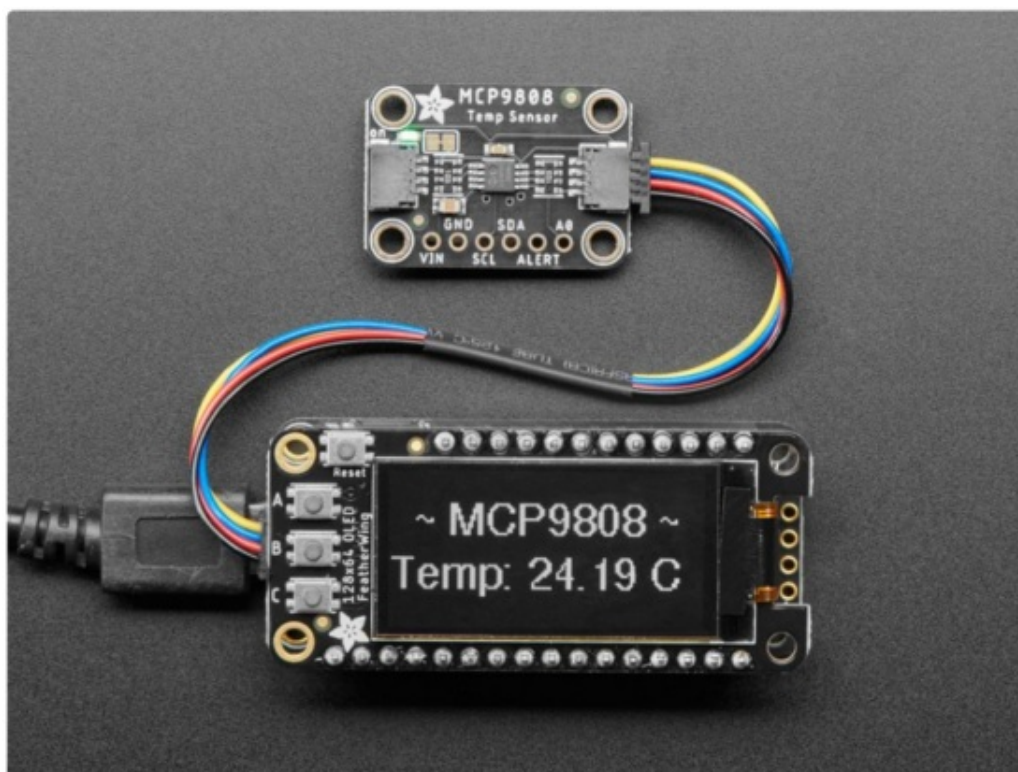

This I2C digital temperature sensor is one of the more accurate/precise we've ever seen, with a typical accuracy of $\pm 0.25^{\circ}\text{C}$ over the sensor's -40°C to $+125^{\circ}\text{C}$ range and precision of $\pm 0.0625^{\circ}\text{C}$. They work great with any microcontroller using standard i2c. There are 3 address pins so you can connect up to 8 to a single I2C bus without address collisions. Best of all, a wide voltage range makes it usable with 2.7V to 5.5V logic!

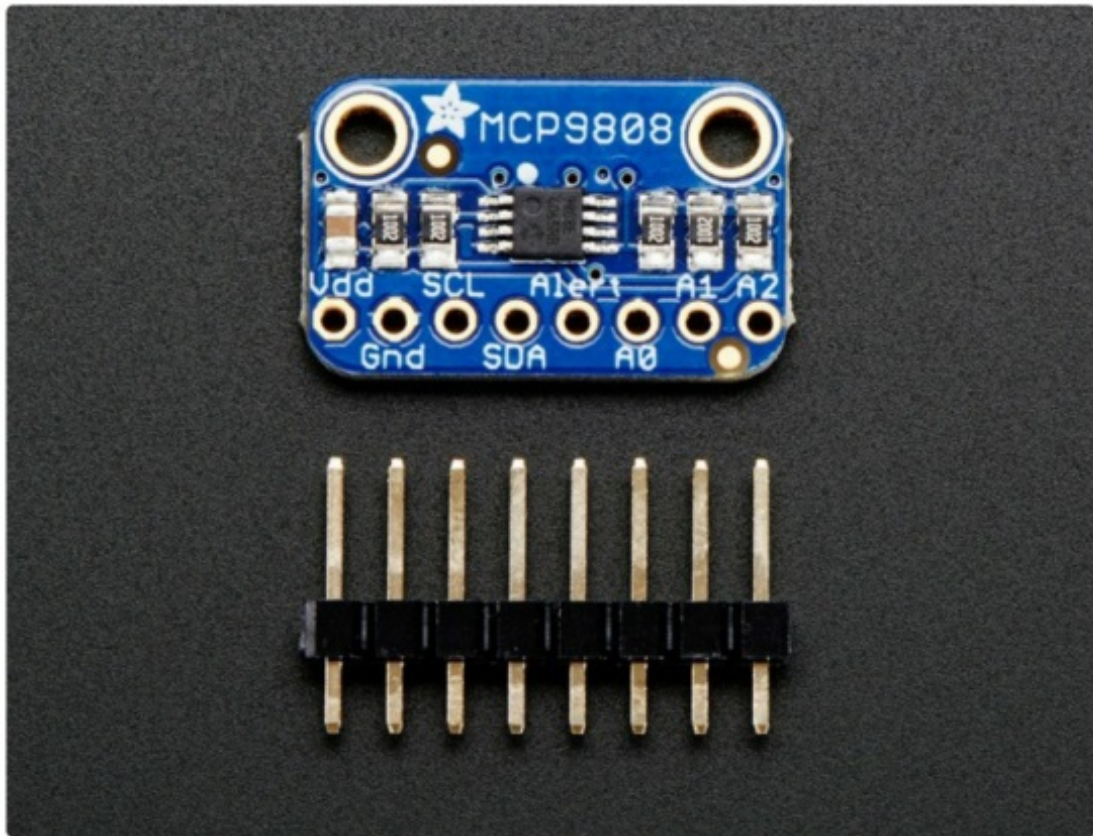


Unlike the DS18B20, this sensor does not come in a through-hole package so we placed this small sensor on a breakout board PCB for easy use. The PCB includes mounting holes and pull-down resistors for the 3 address pins. We even wrote a lovely little library for Arduino that will work with any Arduino compatible. You'll be up and running in 15 minutes or less.

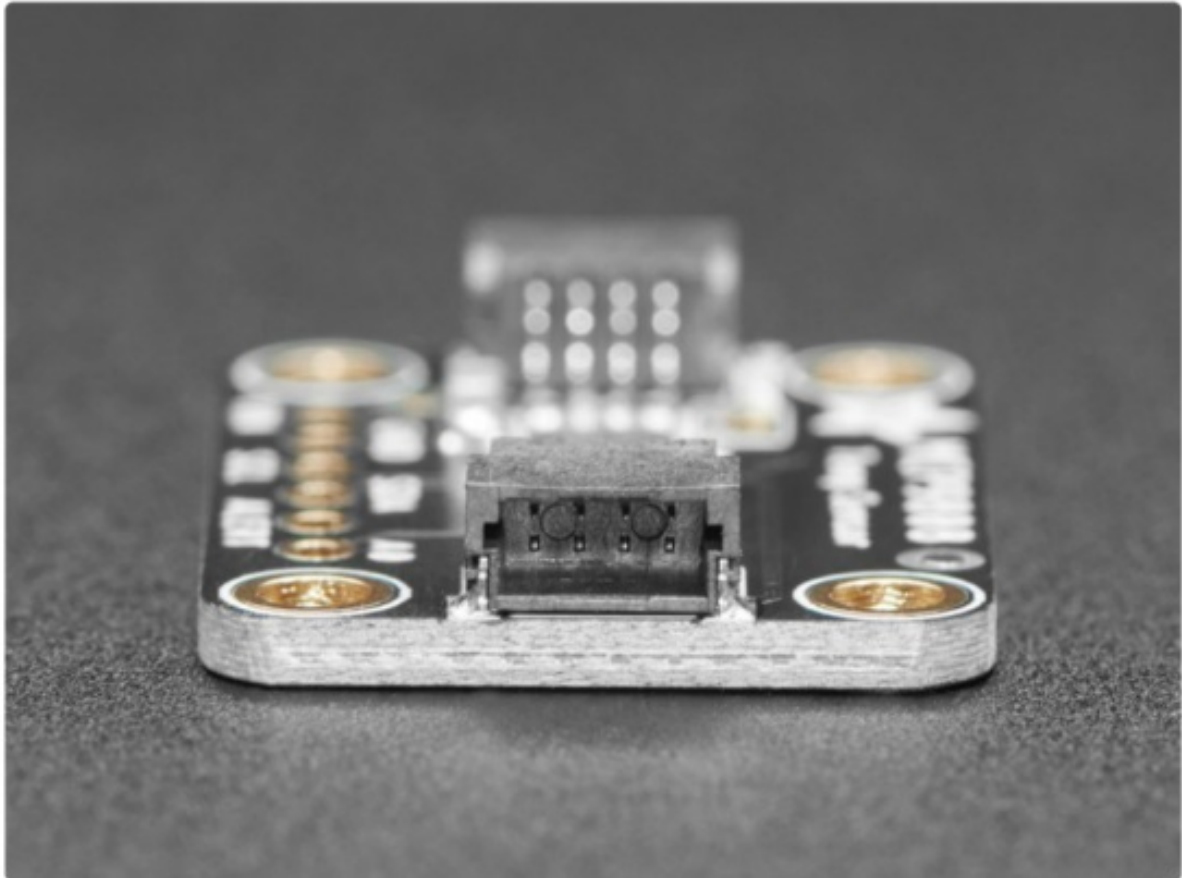


To get you going fast, we spun up a custom-made PCB with the MCP9808 and some supporting circuitry such as pullup resistors and capacitors, in the STEMMA QT form factor (<https://adafru.it/LBQ>), making them easy to interface with. The STEMMA QT connectors (<https://adafru.it/JqB>) on either side are compatible with the

SparkFun Qwiic (<https://adafru.it/Fpw>) I2C connectors. This allows you to make solderless connections between your development board and the MCP9808 or to chain them with a wide range of other sensors and accessories using a compatible cable (<https://adafru.it/JnB>). QT Cable is not included, but we have a variety in the shop (<https://adafru.it/JnB>).


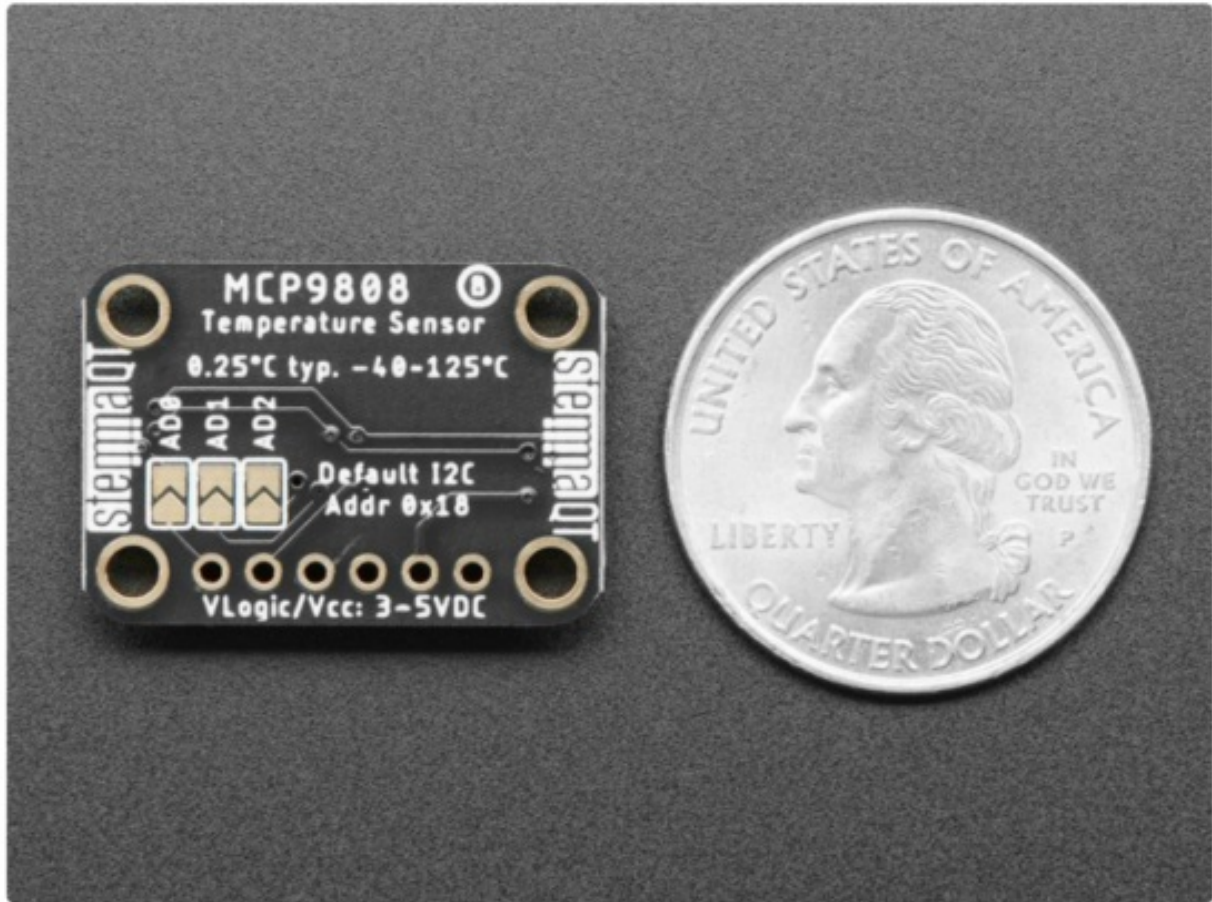


- Simple I2C control
- Up to 8 on a single I2C bus with adjustable address pins
- 0.25°C typical precision over -40°C to 125°C range (0.5 °C guaranteed max from -20°C to 100°C)
- 0.0625°C resolution
- 2.7V to 5.5V power and logic voltage range
- Operating Current: 200 μ A (typical)

There are two versions of this board – the STEMMA QT version shown above, and the original header-only version shown below. Code works the same on both!

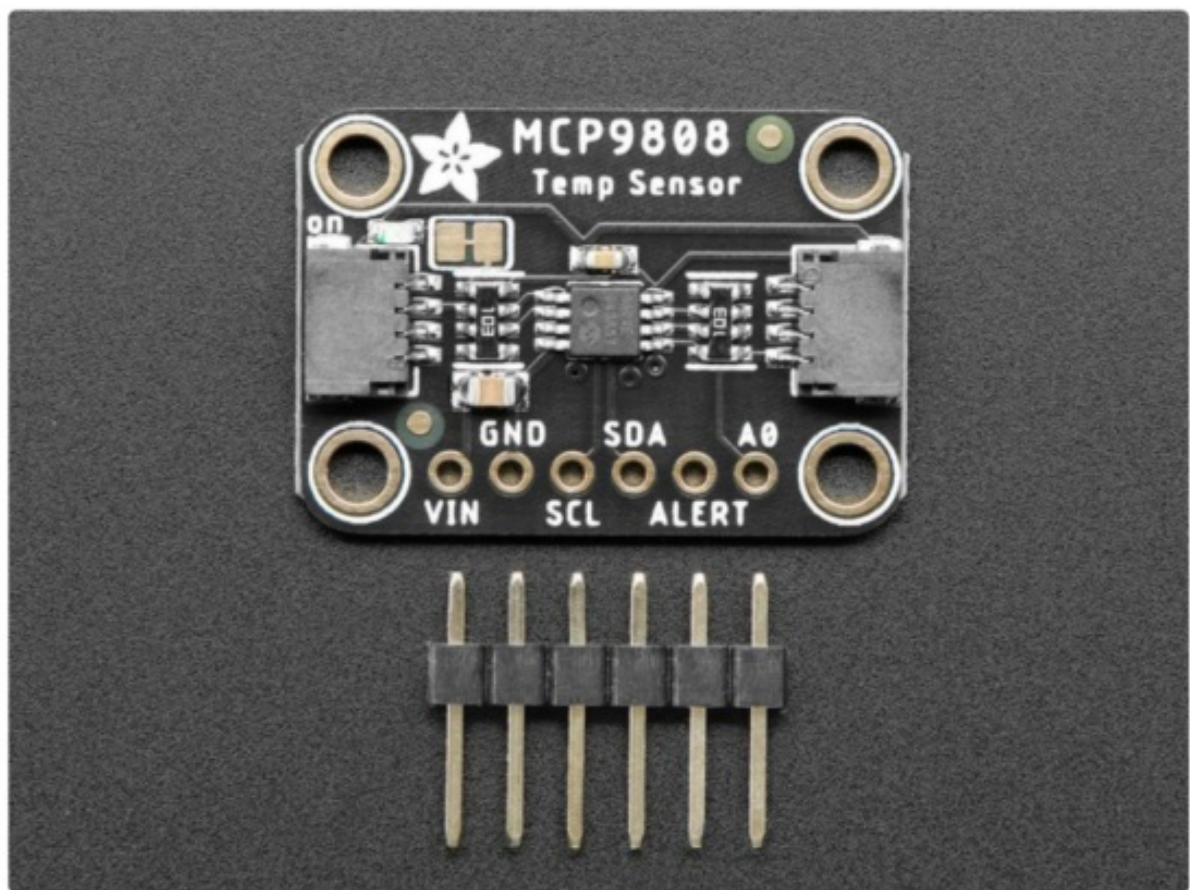

Pinouts

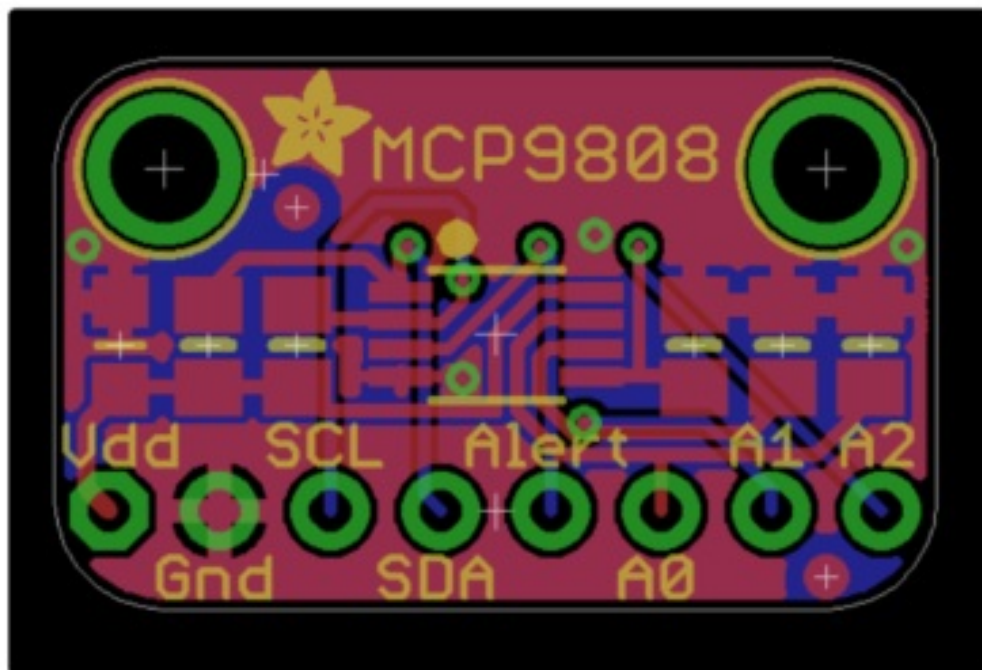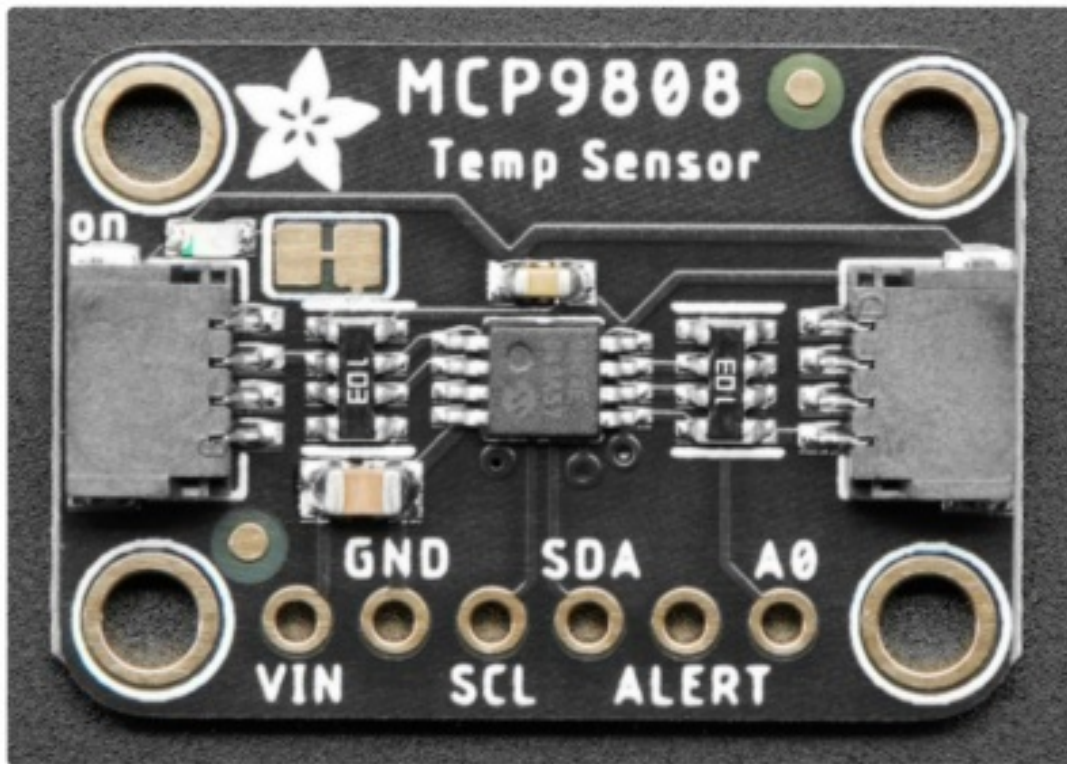

The MCP9808 is a very straightforward sensor, let's go thru all the pins so you can understand what you need to connect to get started.

Power Pins

- VIN (VDD on the header-only version) – This is a positive power and logic level pin. It can be 2.75.5VDC, so fine for use with 3 or 5V logic. Power VIN (VDD) with whatever logic level you plan to use on the i2c lines.
- GND – This is the ground power and logic reference pin.

I2C Data Pins

- SCL – this is the I2C clock pin. There's a 10K pull-up already on the board, so connect this directly to the i2c

master clock pin on your microcontroller

- SDA – this is the I2C data pin. There's a 10K pull-up already on the board, so connect this directly to the i2c master data pin on your microcontroller
- STEMMA QT (<https://adafru.it/Ft4>) – These connectors allow you to connect to development boards with STEMMA QT connectors, or to other things, with various associated accessories (<https://adafru.it/Ft6>).

Optional Pins

These are pins you don't need to connect to unless you want to!

- **Alert** – This is the interrupt/alert pin from the MCP9808. The chip has some capability to 'alert' you if the chip temperature goes above or below a set amount. This output can trigger to let you know. It is an open collector so you need to use a pull-up resistor if you want to read the signal from this pin.
- **A0 (as well as A1 and A2 on the original version)** – These are the address select pins. Since you can only have one device with a given address on an i2c bus, there must be a way to adjust the address if you want to put more than one MCP9808 on a shared i2c bus. The A0/A1/A2 pins set the bottom three bits of the i2c address. There are pull-down resistors on the board so connect them to VDD to set the bits to '1'. They are read on power-up, so de-power and re-power to reset the address

The default address is 0x18 and the address can be calculated by 'adding' the A0/A1/A2 to the base of 0x18. A0 sets the lowest bit with a value of 1, A1 sets the middle bit with a value of 2, and A2 sets the high bit with a value of 4. The final address is $0x18 + A2 + A1 + A0$.


So for example if A2 is tied to VDD and A0 is tied to VDD, the address is $0x18 + 4 + 1 = 0x1D$.

If only A0 is tied to VDD, the address is $0x18 + 1 = 0x19$



If only A1 is tied to VDD, the address is $0x18 + 2 = 0x1A$

If only A2 is tied to VDD, the address is $0x18 + 4 = 0x1C$

This address information applies to both versions of the MCP9808 breakout. The STEMMA QT version has jumpers on the back that you can use to tie the address pins to VDD.

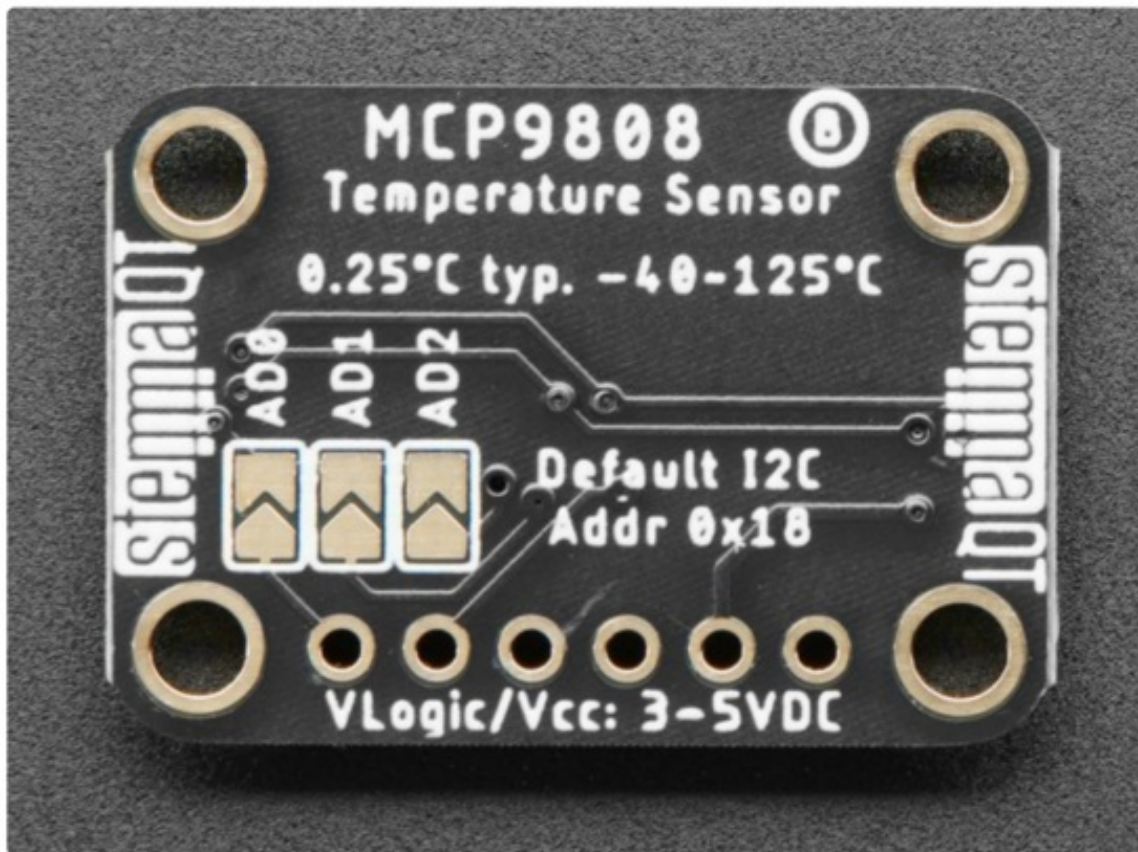

Arduino Code


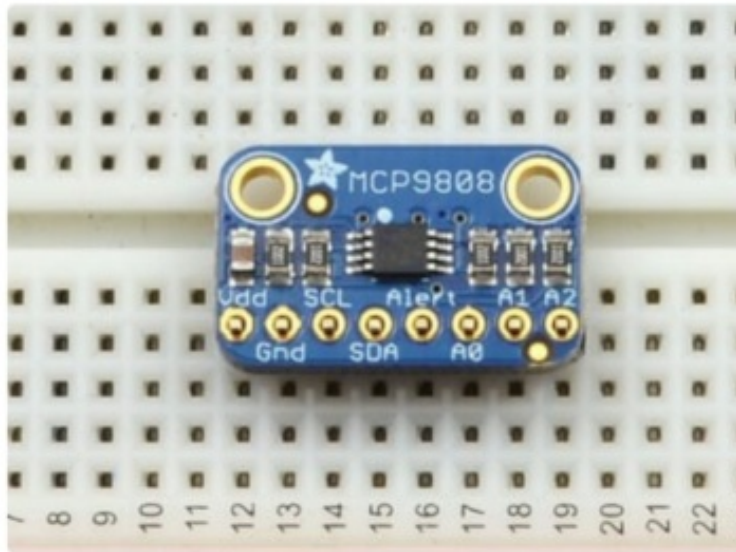
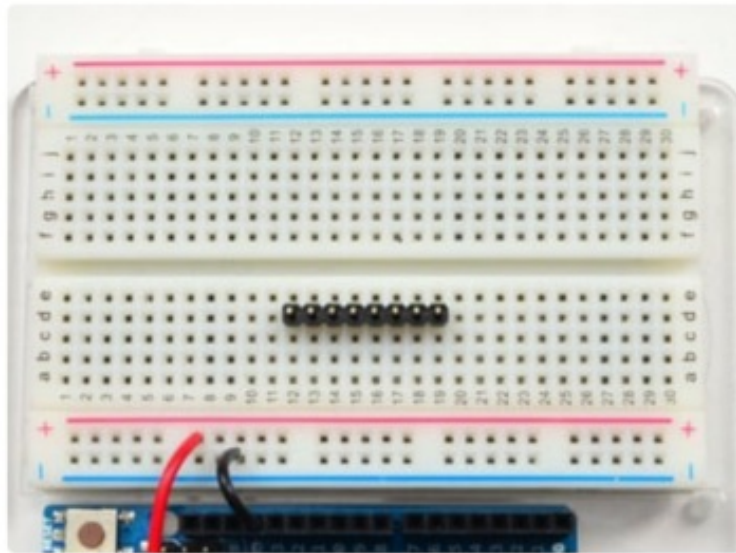


Prepare the header strip:

Cut the strip to length if necessary. It will be easier to solder if you insert it into a breadboard – long pins down

Add the breakout board:


Place the breakout board over the pins so that the short pins poke through the breakout pads

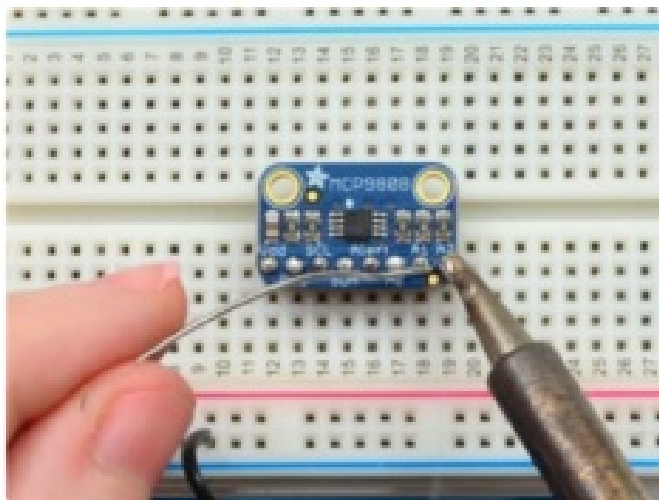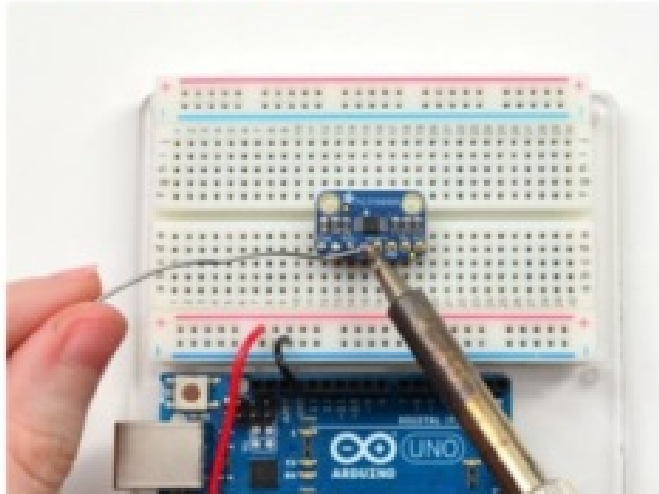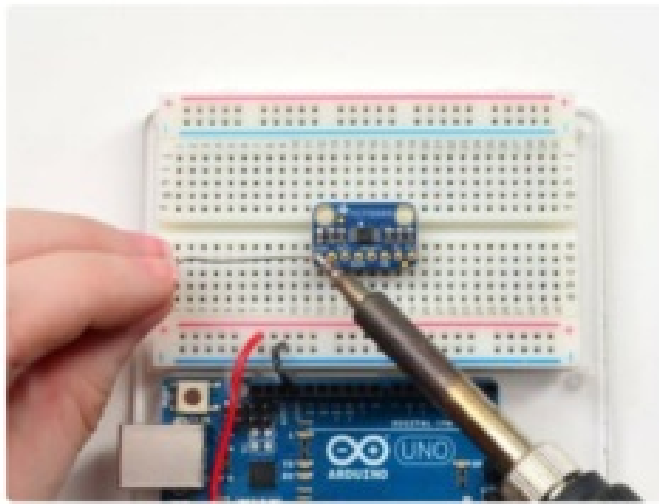

And Solder!

Be sure to solder all pins for reliable electrical contact.




(For tips on soldering, be sure to check out our Guide to Excellent Soldering (<https://adafru.it/aTk>)).

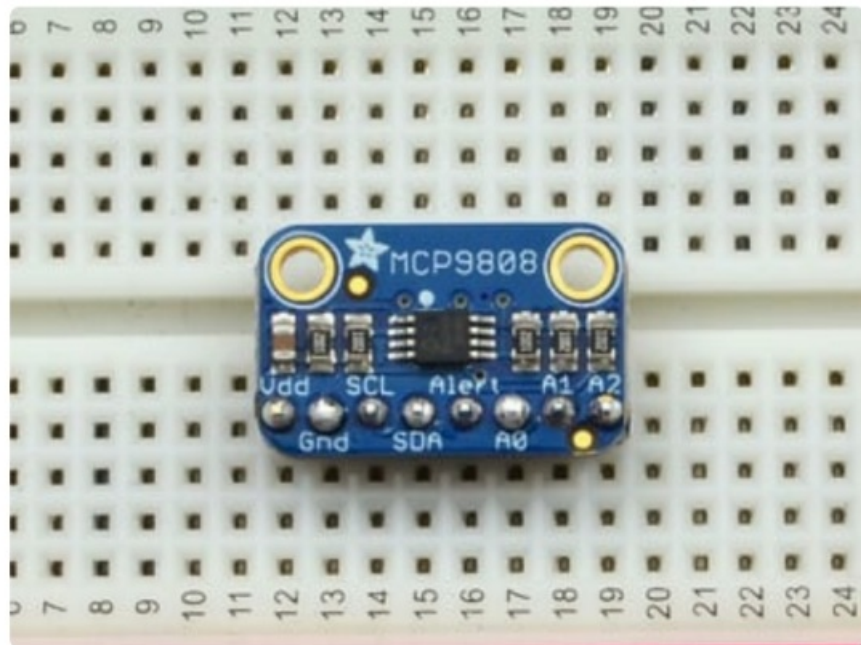

You're done! Check your solder joints visually and continue on the next steps

Arduino Wiring

You can easily wire this sensor to any microcontroller, we'll be using an Arduino

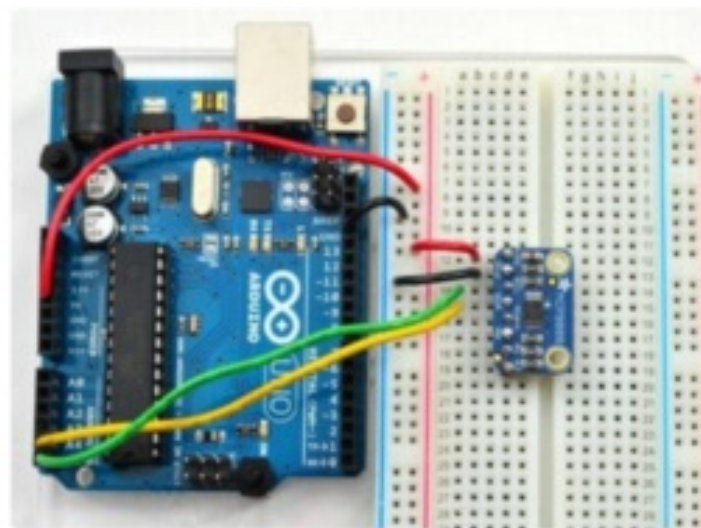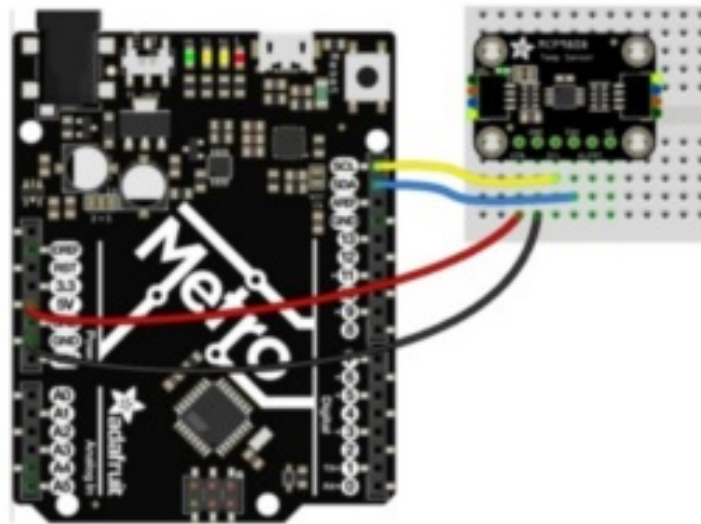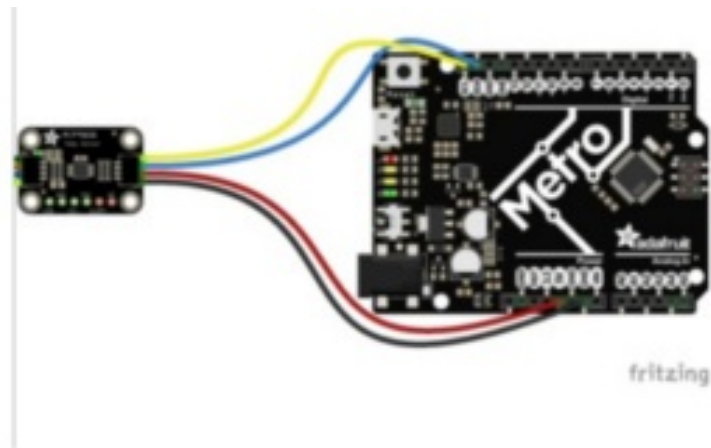


- Connect VIN (Vdd) (red wire on the **STEMMA** QT version) to the power supply, 3V or 5V is fine. Use the same voltage that the microcontroller logic is based on. For most Arduinos, that is 5V
- Connect GND (black wire on the **STEMMA** QT version) to common power/data ground
- Connect the SCL pin to the I2C clock SCL pin on your Arduino (yellow wire on **STEMMA** QT version). On a UNO & '328 based Arduino, this is also known as A5, on a Mega it is also known as digital 21 and on a Leonardo/Micro, digital 3
- Connect the SDA pin to the I2C data SDA pin on your Arduino (blue wire on **STEMMA** QT version). On a UNO & '328 based Arduino, this is also known as A4, on a Mega it is also known as digital 20 and on a Leonardo/Micro, digital 2

The MCP9808 has a default I2C address of 0x18 but you can set the address to any of 8 values between 0x18 and 0x1F so you can have up to 8 of these sensors all sharing the same SCL/SDA pins.

Download Adafruit_MCP9808

To begin reading sensor data, you will need to download the Adafruit MCP9808 library from the Arduino library manager.

Open up the Arduino library manager:

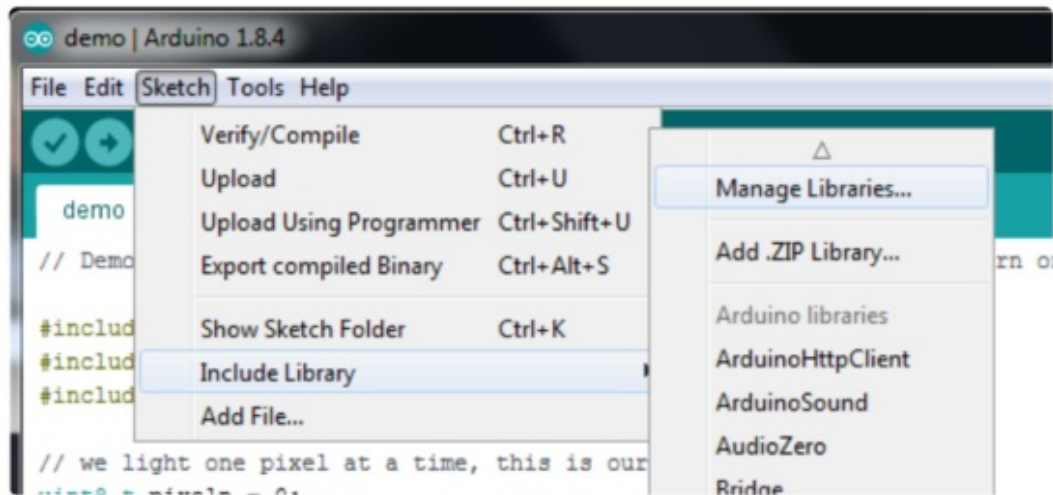

Search for the Adafruit MCP9808 library and install it




We also have a great tutorial on Arduino library installation at:


<http://learn.adafruit.com/adafruit-all-about-arduino-libraries-install-use> (<https://adafru.it/aYM>)

Load Demo

Open up **File->Examples->Adafruit_MCP9808->mcp9808test** and upload to your Arduino wired up to the sensor

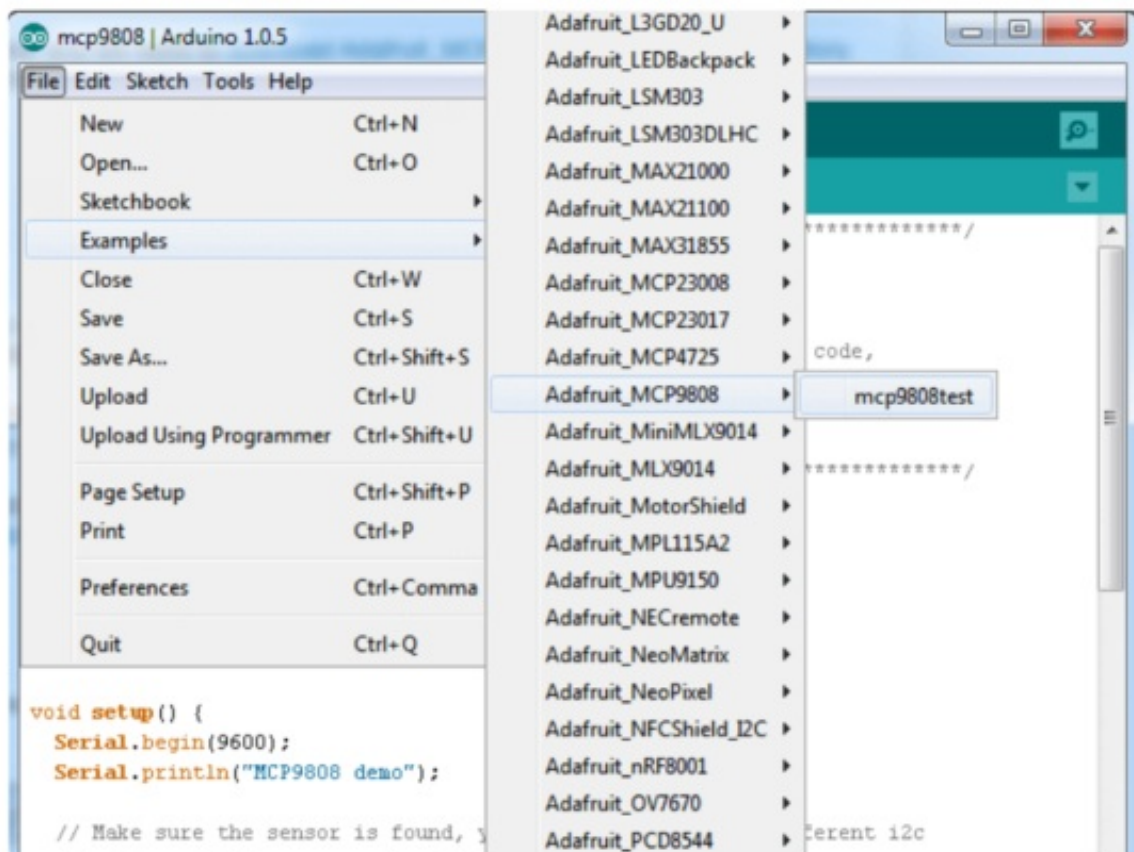

That's it! Now open up the serial terminal window at 9600 speed to see the temperature in real-time. You can try touching your finger to the sensor to see the temperature rise.



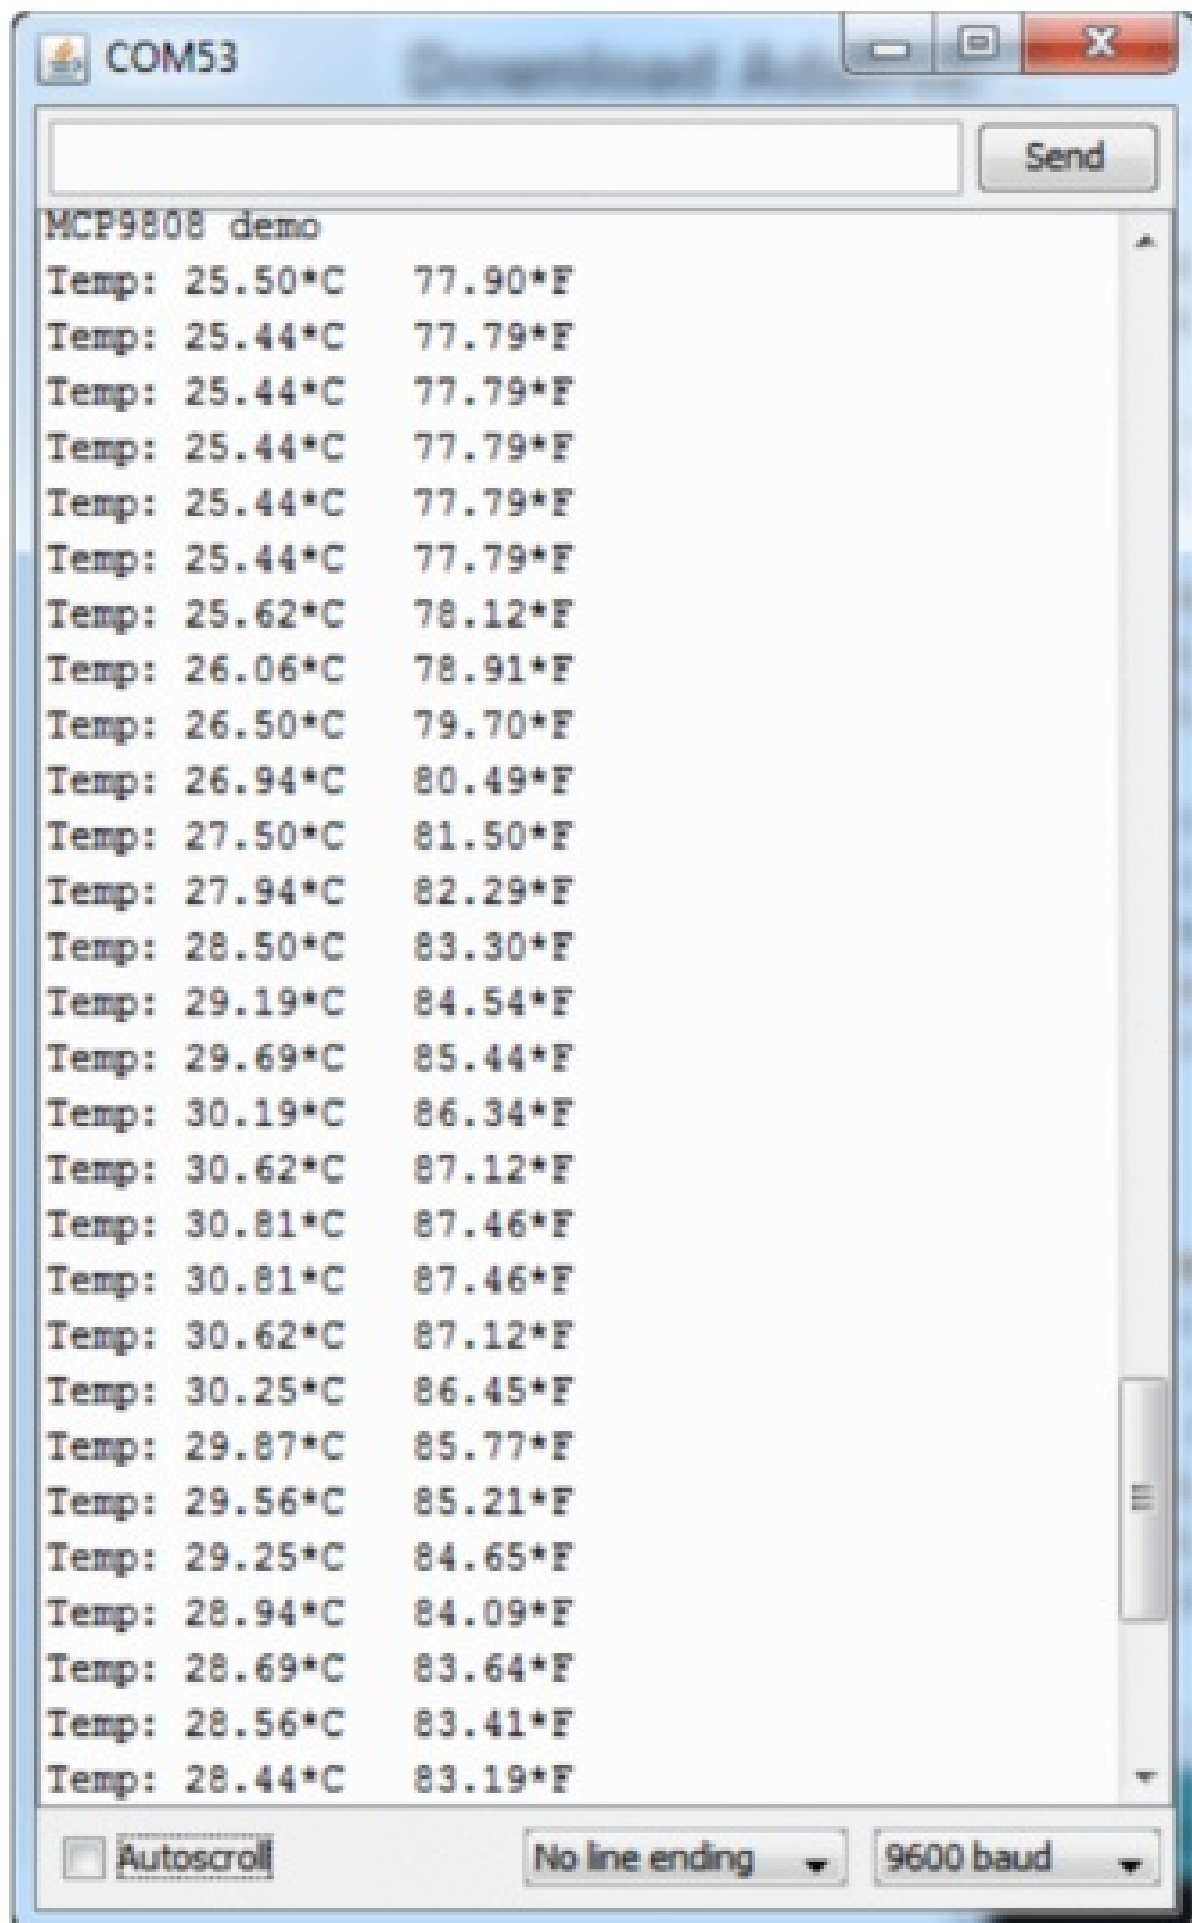


It's easy to use the MCP9808 sensor with Python or CircuitPython and the Adafruit CircuitPython MCP9808 (<https://adafru.it/zcr>) module. This module allows you to easily write Python code that reads the temperature from the sensor.

You can use this sensor with any CircuitPython microcontroller board or with a computer that has GPIO and Python thanks to Adafruit_Blinka, our CircuitPython-for-Python compatibility library (<https://adafru.it/BSN>).

CircuitPython Microcontroller Wiring

First, wire up an MCP9808 to your board exactly as shown on the previous pages for Arduino. Here's an example of wiring a Feather M0 to the sensor:

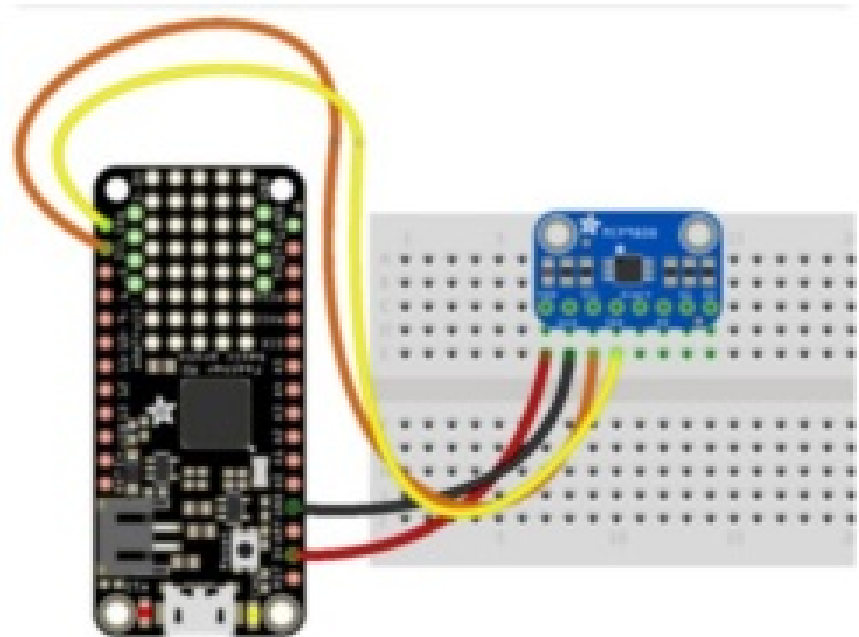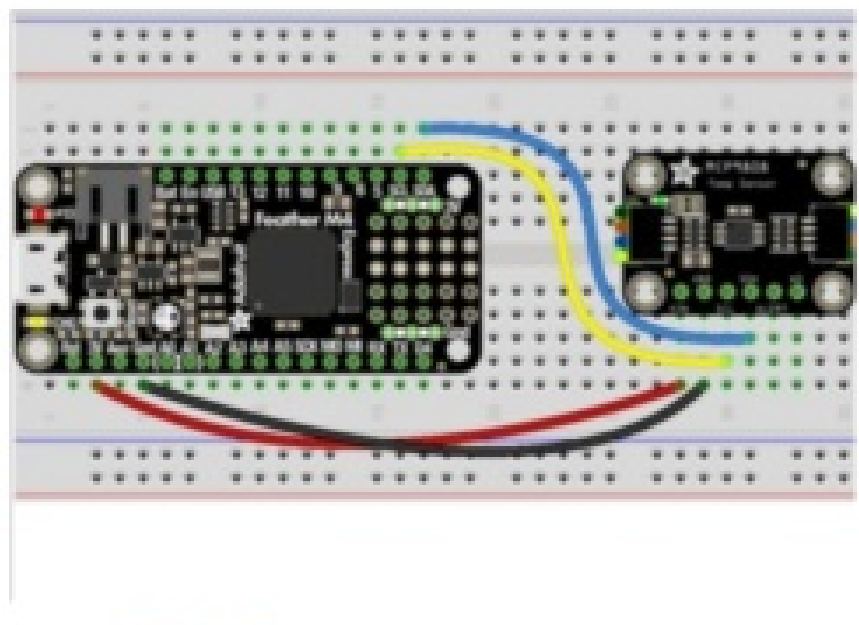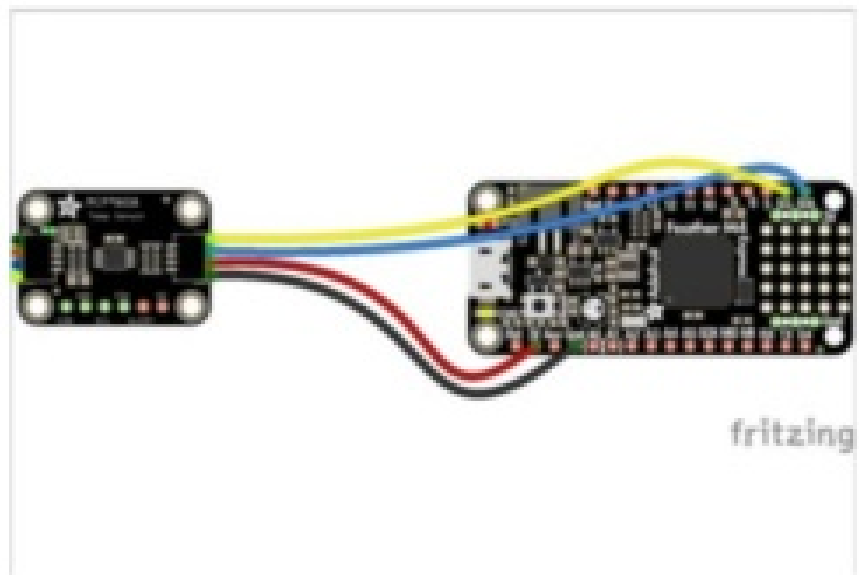


- Board 3V to sensor VIN (Vdd) (red wire on STEMMA QT version)
- Board GND to sensor GND (black wire on STEMMA QT version)

- Board SCL to sensor SCL (yellow wire on STEMMA QT version)
- Board SDA to sensor SDA (blue wire on STEMMA QT version)

Python Computer Wiring

Since there are dozens of Linux computers/boards you can use we will show the wiring for Raspberry Pi. For other platforms, please visit the guide for CircuitPython on Linux to see whether your platform is supported (<https://adafru.it/BSN>).

Here's the Raspberry Pi wired with I2C:

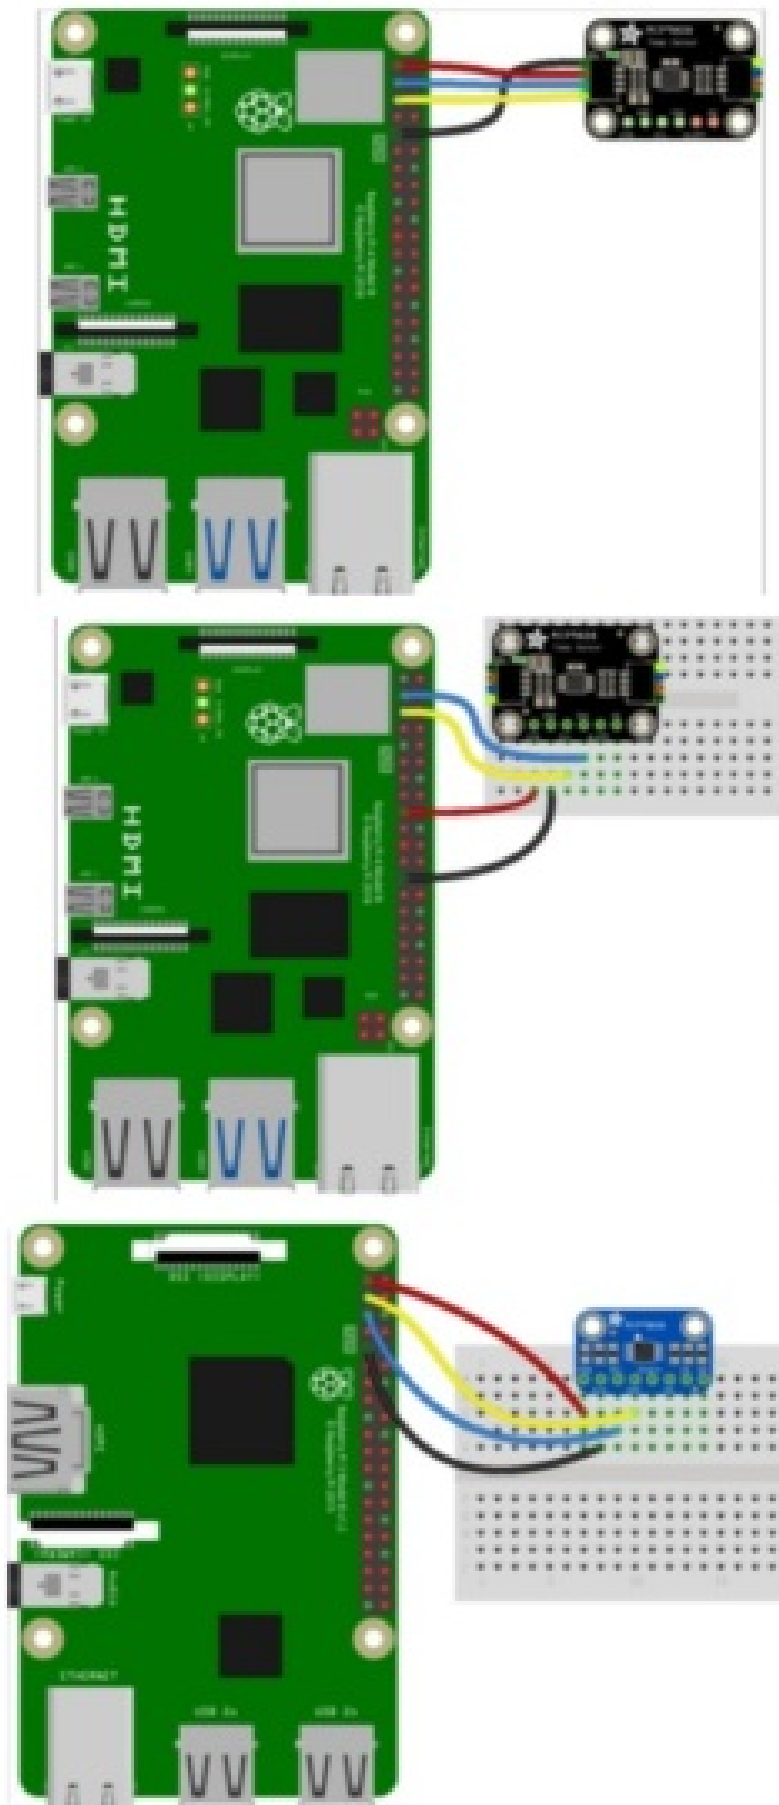

- Pi 3V3 to sensor VIN (red wire on STEMMMA QT version)
- Pi GND to sensor GND (black wire on STEMMMA QT version)
- Pi SCL to sensor SCK (yellow wire on STEMMMA QT version)
- Pi SDA to sensor SDA (blue wire on STEMMMA QT version)

CircuitPython Installation of MCP9808 Library

Next, you'll need to install the **Adafruit CircuitPython MCP9808** (<https://adafru.it/zcr>) library on your CircuitPython board.

First, make sure you are running the latest version of Adafruit CircuitPython (<https://adafru.it/tBa>) for your board. Next, you'll need to install the necessary libraries to use the hardware—carefully follow the steps to find and install these libraries from Adafruit's CircuitPython library bundle (<https://adafru.it/zdx>). For example, the Circuit Playground Express guide has a great page on how to install the library bundle (<https://adafru.it/Bf2>) for both express and non-express boards.

Remember for non-express boards like the Trinket M0, Gemma M0, and Feather/Metro M0 basic you'll need to manually install the necessary libraries from the bundle:

- adafruit_mcp9808.mpy
- adafruit_bus_device

Before continuing make sure your board's lib folder or root filesystem has the adafruit_mcp9808.mpy, and adafruit_bus_device files and folders copied over.

Next, connect to the **board's serial REPL** (<https://adafru.it/pMf>) so you are at the CircuitPython >>> prompt.

Python Installation of MCP9808 Library

You'll need to install the Adafruit_Blinka library that provides CircuitPython support in Python. This may also require enabling I2C on your platform and verifying you are running Python 3. Since each platform is a little different, and Linux changes often, please visit the CircuitPython on Linux guide to get your computer ready (<https://adafru.it/BSN>)!

Once that's done, from your command line run the following command:

Sudo pip3 install adafruit-circuit-python-mcp9808

If your default Python is version 3 you may need to run 'pip' instead. Just make sure you aren't trying to use CircuitPython on Python 2. x, it isn't supported!

CircuitPython & Python Usage

To demonstrate the usage of the sensor we'll initialize it and read the temperature. First, initialize the I2C connection and library by running:

```
import board
import busio
import adafruit_mcp9808

i2c = busio.I2C(board.SCL, board.SDA)
MCP = adafruit_mcp9808.MCP9808(i2c)
```

Now you can read the temperature property to retrieve the temperature from the sensor in degrees Celsius: `print (MCP.temperature)` That's all there is to read the temperature with the MCP9808 and CircuitPython code!

Full Example Code

```
# SPDX-FileCopyrightText: 2021 ladyada for Adafruit Industries
# SPDX-License-Identifier: MIT
import time
import board
import adafruit_mcp9808
i2c = board.I2C()
# uses board.SCL and board.SDA
# To initialise using the default address: mcp = adafruit_mcp9808.MCP9808(i2c)
```



```
# To initialise using a specified address:
# Necessary when, for example, connecting AO to VDD to make address=0x19
# mcp = adafruit_mcp9808.MCP9808(i2c_bus, address=0x19) while True: tempC = mcp.temperature
tempF = tempC * 9 / 5 + 32
print("Temperature: {} C {} F ".format(tempC, tempF)) time.sleep(2)
```

Python Docs

Python Docs (<https://adafru.it/C3s>)

Downloads


Datasheets & Files


MCP9808 datasheet (<https://adafru.it/dfL>)

EagleCAD PCB files on GitHub (<https://adafru.it/qib>)


Fritzing object in Adafruit Fritzing library (<https://adafru.it/c7M>)


Schematic and Fab Print for STEMMA QT Version

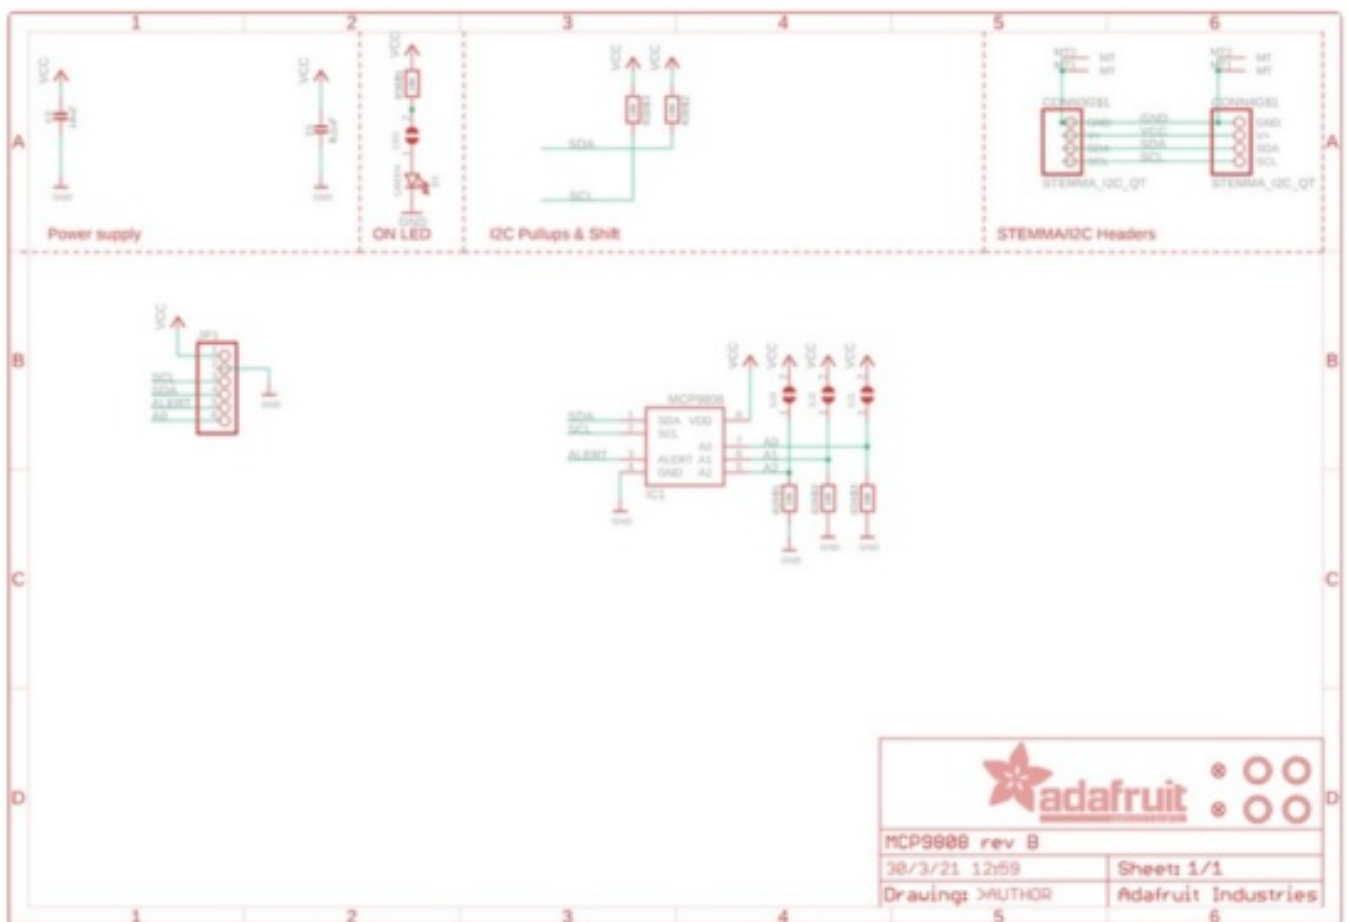

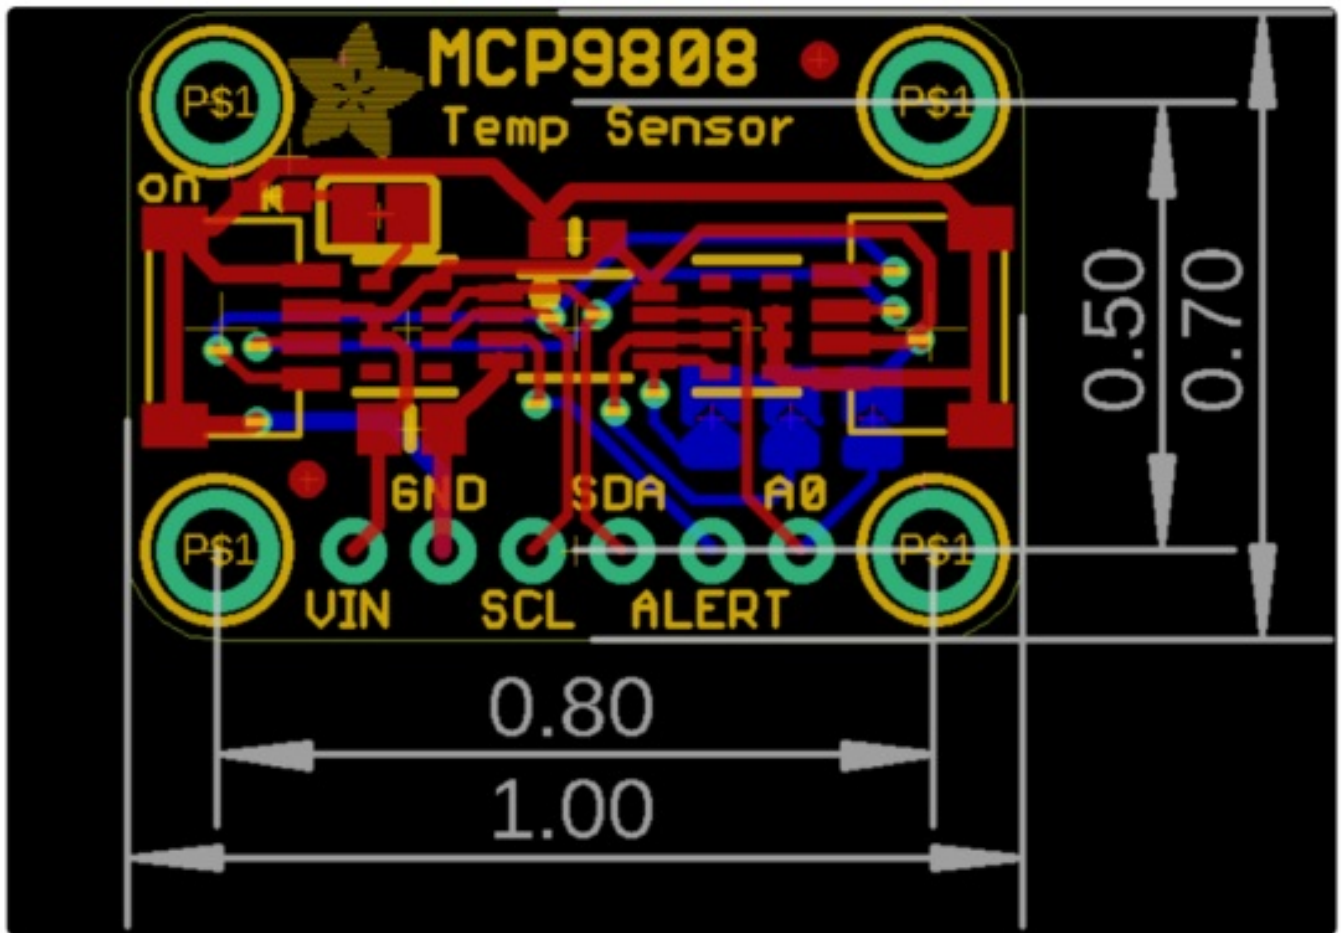

Schematic and Fab Print for Original Version

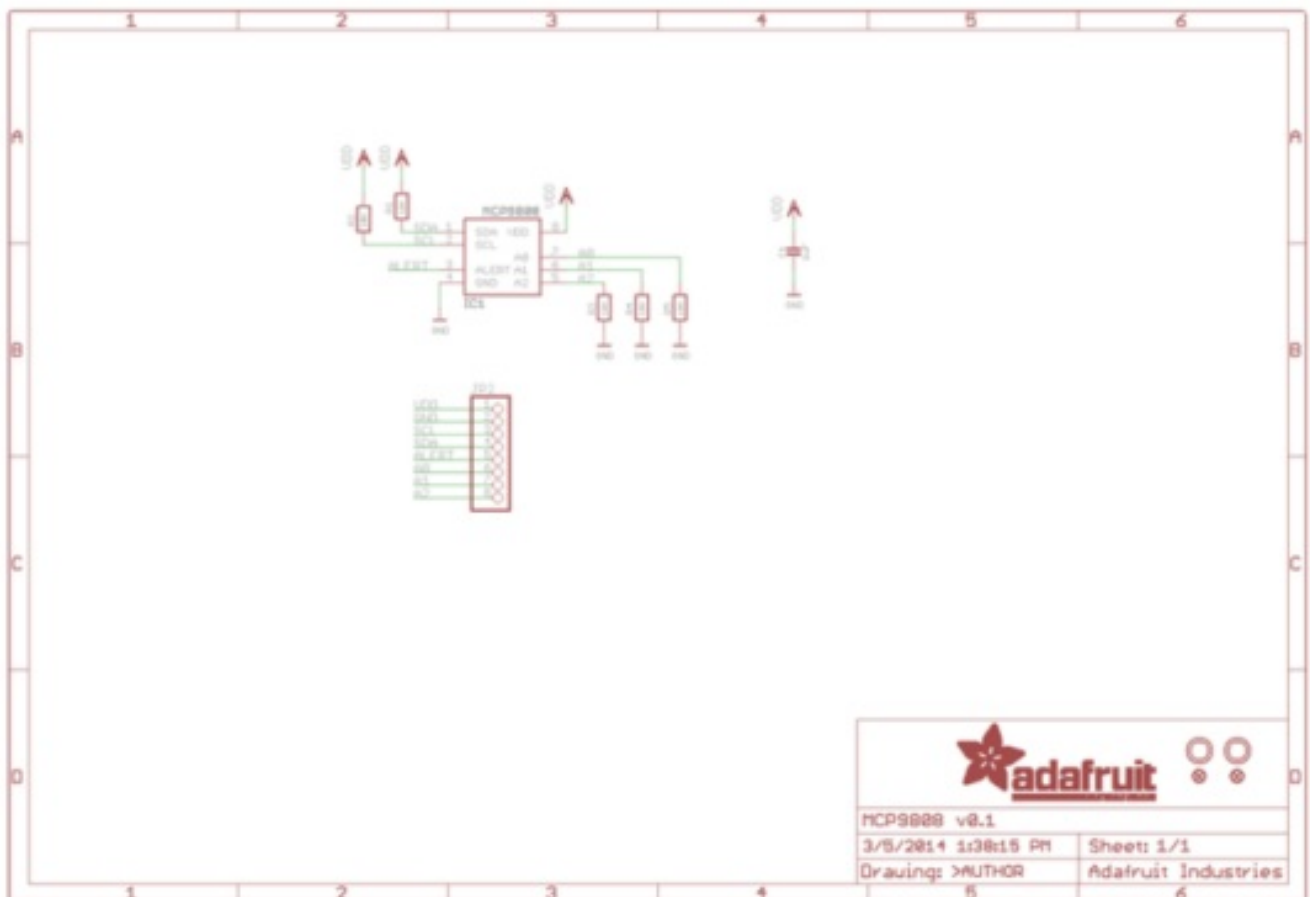

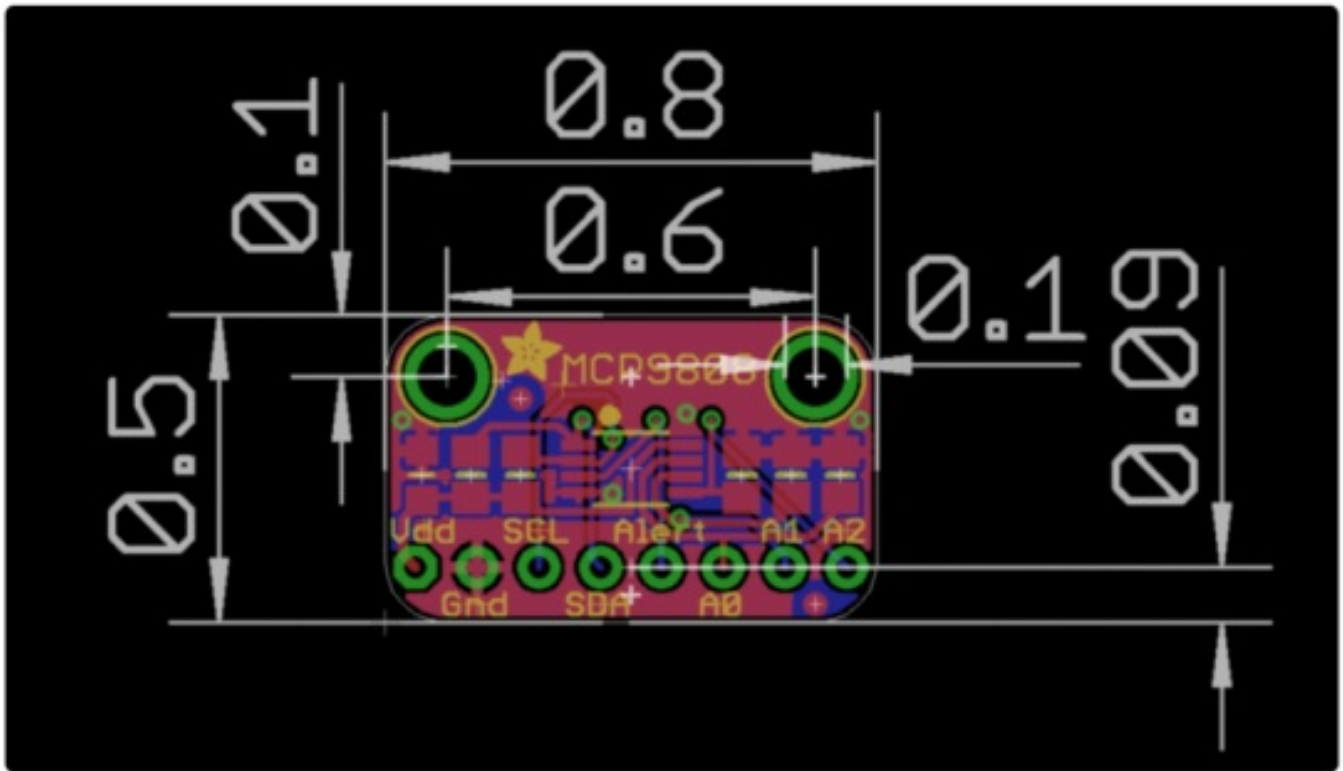


© Adafruit Industries
























<https://learn.adafruit.com/adafruit-mcp9808-precision-i2c-temperature-sensor-guide>

Documents / Resources

	<p>Adafruit MCP9808 Precision I2C Temperature Sensor [pdf] User Guide MCP9808, Precision I2C Temperature Sensor, Temperature Sensor</p>
---	---

References

- ★ [Arduino Libraries | All About Arduino Libraries | Adafruit Learning System](#)
- ★ [Tools | Adafruit Guide To Excellent Soldering | Adafruit Learning System](#)
- ★ [Tools | Adafruit Guide To Excellent Soldering | Adafruit Learning System](#)
- ★ [Arduino Libraries | All About Arduino Libraries | Adafruit Learning System](#)
- ★ [Overview | CircuitPython on Linux and Raspberry Pi | Adafruit Learning System](#)
- ★ [Introduction — Adafruit MCP9808 Library 1.0 documentation](#)
- ★ [GitHub - adafruit/Fritzing-Library: Adafruit parts, components, breakouts, etc...in Fritizable format!](#)
- ★ [adafru.it/dfL](#)
- ★ [Qwiic Connect System - SparkFun Electronics](#)
- ★ [What is STEMMA? | Adafruit STEMMA & STEMMA QT | Adafruit Learning System](#)
- ★ [Adafruit Industries, Unique & fun DIY electronics and kits](#)
- ★ [Adafruit Industries, Unique & fun DIY electronics and kits](#)
- ★ [What is STEMMA QT? | Adafruit STEMMA & STEMMA QT | Adafruit Learning System](#)

-  [Adafruit Industries, Unique & fun DIY electronics and kits](#)
-  [Serial REPL | MicroPython Basics: How to Load MicroPython on a Board | Adafruit Learning System](#)
-  [GitHub - adafruit/Adafruit-MCP9808-Breakout-PCB: PCB files for the Adafruit MCP9808 Breakout](#)
-  [Releases · adafruit/circuitpython · GitHub](#)
-  [GitHub - adafruit/Adafruit_CircuitPython_MCP9808: CircuitPython drivers for the MCP9808 i2c high accuracy temperature sensor.](#)
-  [GitHub - adafruit/Adafruit_CircuitPython_Bundle: A bundle of useful CircuitPython libraries ready to use from the filesystem.](#)
-  [Introduction — Adafruit MCP9808 Library 1.0 documentation](#)
-  [GitHub - adafruit/Adafruit_CircuitPython_Bundle: A bundle of useful CircuitPython libraries ready to use from the filesystem.](#)
-  [GitHub - adafruit/Adafruit_CircuitPython_MCP9808: CircuitPython drivers for the MCP9808 i2c high accuracy temperature sensor.](#)
-  [GitHub - adafruit/Adafruit-MCP9808-Breakout-PCB: PCB files for the Adafruit MCP9808 Breakout](#)
-  [Releases · adafruit/circuitpython · GitHub](#)
-  [GitHub - adafruit/Fritzing-Library: Adafruit parts, components, breakouts, etc...in Fritzing format!](#)
-  [Adafruit Learning System](#)
-  [Adafruit Learning System](#)
-  [Adafruit Learning System](#)
-  [Adafruit Learning System](#)
-  [Adafruit Learning System](#)
-  [Adafruit Learning System](#)
-  [Adafruit Learning System](#)
-  [Adafruit Learning System](#)
-  [Adafruit Learning System](#)
-  [Adafruit Learning System](#)
-  [Adafruit Learning System](#)