

ANBERNIC Anbernic RG P01 Game Controller Hall Effect Triggers



Anbernic RG P01 Game Controller Hall Effect Triggers User Manual

[Home](#) » [ANBERNIC](#) » Anbernic RG P01 Game Controller Hall Effect Triggers User Manual 

Contents

- [1 Anbernic RG P01 Game Controller Hall Effect Triggers](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Wireless pairing](#)
- [5 2.4G Receiver connection](#)
- [6 Wired connection](#)
- [7 MACRO Programming Mode](#)
- [8 Parameter adjustment](#)
- [9 Frequently Asked Questions](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)

ANBERNIC

Anbernic RG P01 Game Controller Hall Effect Triggers



Product Information

Specifications

- Model: RG P01
- Wireless Connectivity: Bluetooth
- Compatibility: Android, iOS, PC, Switch, XBOX
- Power Mode: Rechargeable battery
- Connection Type: Wireless and Wired

Product Usage Instructions

Power Properties

The controller's power properties:

- Charging: LED5 is always on.
- Low Power Sleep: LED1-LED4 indicators flash; Automatically sleeps after 5 minutes of no action.
- Power Off: Press and hold HOME for 5 seconds.

MACRO Programming Mode

To enter programming mode:

- Hold down M1 or M2, then press Select or Start to begin programming.
- Follow the on-screen instructions to program the buttons as needed.

Wireless pairing

Mode Pairing Method LED Status

- Switch Press pairing button for 2 seconds Assign LED1-LED4 by player
- Android Press and hold X, then press the pairing button for 2 seconds LED2 is always on
- iOS Press and hold A, then press the pairing button for 2 seconds LED3 is always on
- Xinput Press and hold B, then press the pairing button for 2 seconds LED1+LED4 is always on

When pairing Switch, you need to open the Switch main interface and click "Controller icon->Change grip/order->Enter pairing interface" in sequence

After the controller is paired with the host once, you can press the HOME button later and the controller will automatically reconnect to the host.

2.4G Receiver connection

Mode Connection Method

PC(Xinput)

- Insert the receiver into the USB of the PC, and press and hold the button on the receiver for 2 seconds to enter pairing mode.
- When the receiver light quickly, press the Y + pairing button to pair the receiver.
- When the receiver light slowly, short press the HOME to reconnect.

PC(Switch)

In PC (Xinput) mode, press the Select + Start for 3 seconds to switch

Android (Supports 11.0 and above)

In PC (Switch) mode, press the Select + Start for 3 seconds to switch

LED Status

- LED2 is always on
- LED1 is always on
- LED3 is always on

Wired connection

Mode Connection Method LED Status

- Switch Wired TYPE-C data cable is automatically recognized when inserted into the USB of Switch Assign LED1-LED4 by player
- PC(Xinput) Wired TYPE-C data cable is automatically recognized when inserted into the USB of PC LED2 is always on
- PC(Switch) In PC (Xinput) mode, Press Select + Start for 3 seconds to switch LED1 is always on
- Android (Supports 11.0 and above) In PC (Switch) mode, Press the Select + Start for 3 seconds to switch LED3 is always on


MACRO Programming Mode

Programming Mode Settings Operation

- Press the same time Hold down M1 or M2 ,then press Select Press the buttons to be programmed at the same time, then press M1 or M2 to end
- Press in sequence Hold down M1 or M2 ,then press Start Press the buttons to be programmed in sequence,

then press M1 or M2 to end

Game Button and Port

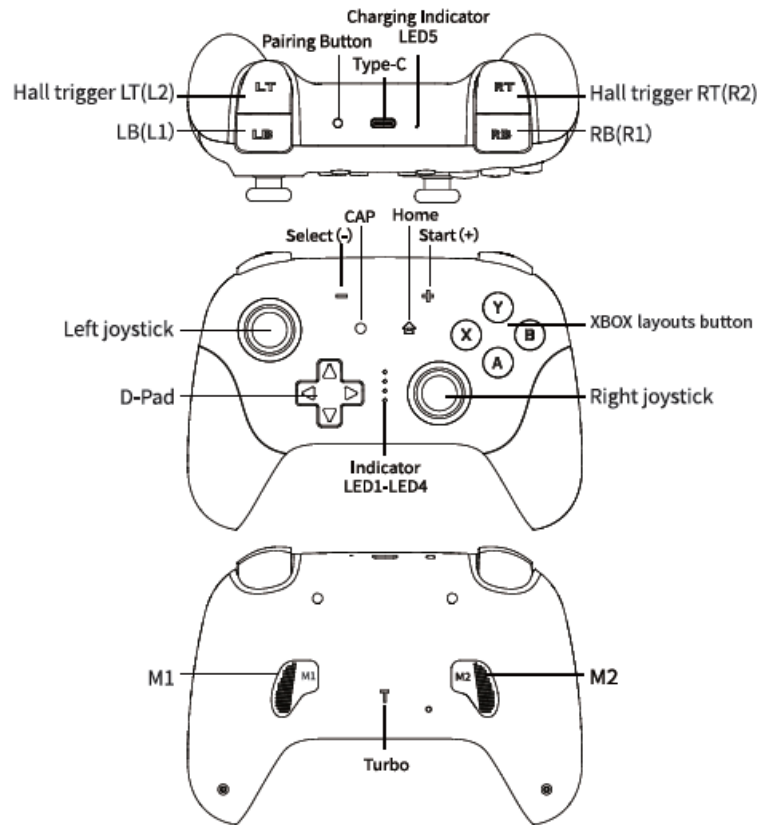

Power properties

Power Mode

- Charging
- Sleep
- Power Off
- Low Power

Status

- Charging indicator LED5 is always on
- Automatically Sleep after 5 minutes of no action
- Current LED1-LED4 indicator is flashing
- Press and hold HOME for 5 seconds

After entering sleep mode or Power Off, press the HOME to wake up the controller.
Short press the pairing button to turn off the controller

Parameter adjustment

- **Gyroscope calibration:** When in sleep mode, press the Select + Home, and LED1-LED4 will flash up and

down. Place the gamepad on a horizontal surface and press the Start key, and LED1-LED4 will all light up, and the calibration is complete.

- **Joystick light mode:** R3 + CAP key can modify the joystick light mode, etc. rotate between the magic color automatic gradient mode, the light color constant light mode, the light breathing automatic color change mode, the light same color constant light mode, the light same color breathing mode, and the light off.
- **Rapid fire setting:** First press and hold the button to set the rapid fire, then press and hold the TURBO key to enter semi-automatic rapid fire, press again to enter fully automatic rapid fire, and press again to cancel the rapid fire.
- **Rapid fire level:** TURBO + right joystick up and down can adjust the rapid fire speed.
- **Vibration level:** TURBO + left joystick up and down can adjust the vibration intensity.
- **Layout switching:** TURBO +Select can swap the key values of A and B keys, and the key values of X and Y keys.

Get technical support services

<https://win.anbernic.com>

Frequently Asked Questions


Q&A

Is there something wrong with the joystick/trigger/motor/gyroscope?

If you encounter issues with any of the controller components, try the following steps:

- Press and hold HOME for 5 seconds to turn off the device, then turn it on again.
- If using a wired connection, please ensure the connection is properly established.

Documents / Resources

	<p>Anbernic RG P01 Game Controller Hall Effect Triggers [pdf] User Manual RG P01 Game Controller Hall Effect Triggers, RG P01, Game Controller Hall Effect Triggers, Controller Hall Effect Triggers, Hall Effect Triggers, Effect Triggers</p>
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.