




**20' POWER SUPPLY INCLUDED
ON CONTROL PANEL**

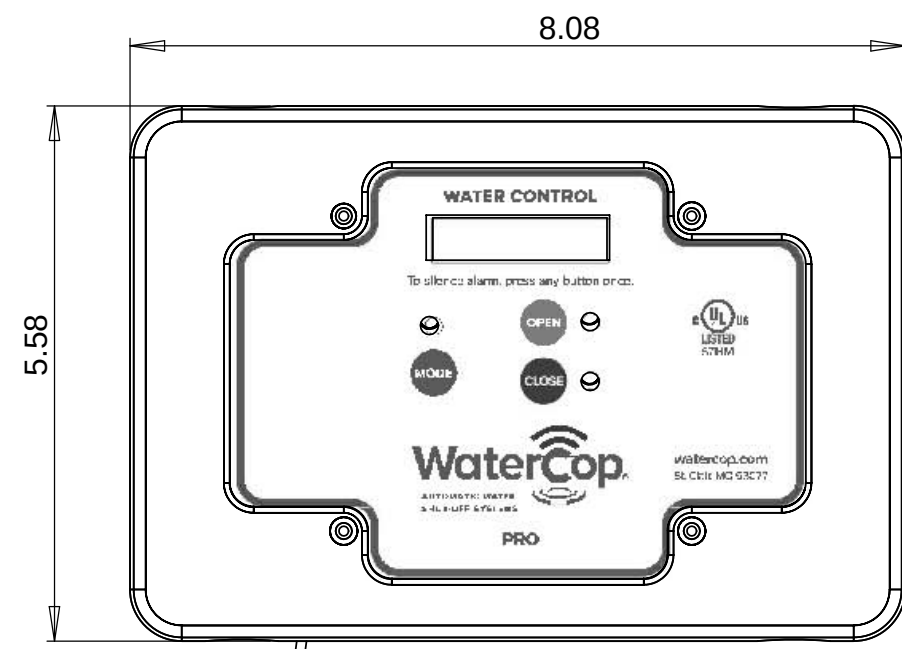


WPKHXX OPTIONAL

WPKXX

CMP RATED CABLE FOR PLENUM APPLICATIONS

ACTUATOR OUTPUT TORQUE - 90 in/ lbs.
MAX WORKING PRESSURE - 125 PSI

**ALL VALVES ARE CERTIFIED TO
NSF/ANSI 372 FOR USE WITH POTABLE WATER**

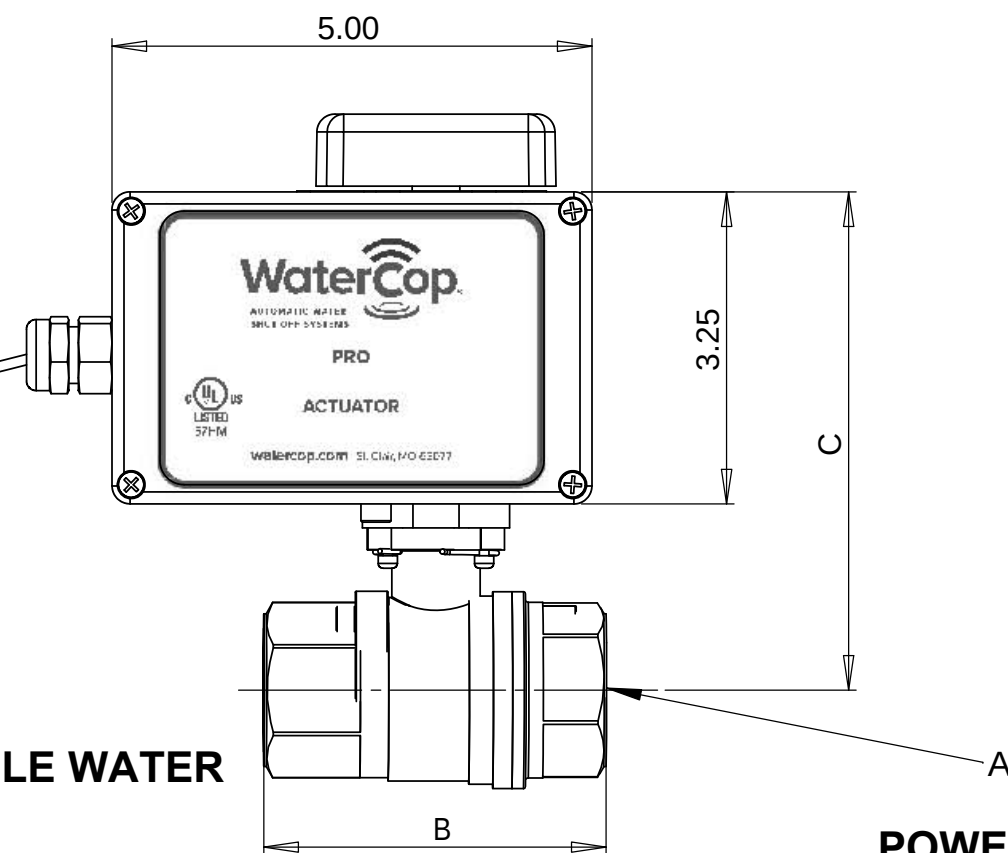

POWER SUPPLY INCLUDED

Model	Cable Length	Hardwired Sensors
WPK25	25'	No
WPKH25	25'	Yes
WPK50	50'	No
WPKH50	50'	Yes
WPK75	75'	No
WPKH75	75'	Yes
WPK150	150'	No
WPKH150	150'	Yes

Valve Size	A	B	C	Flow GPM
1/2	1/2 - 14 NPT	2.60	4.78	19
3/4	3/4-14 NPT	2.90	5.02	34
1	1 - 11-1/2 NPT	3.56	5.19	52
1 1/4	1-1/4 - 11-1/2 NPT	3.66	5.18	77

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
OF DYNAQUIP CONTROLS AND
SHALL NOT BE COPIED,
REPRODUCED, LOANED,
OR DISPOSED OF DIRECTLY
OR INDIRECTLY, NOR USED
FOR ANY PURPOSE OTHER THAN
THAT FOR WHICH IT IS
SPECIFICALLY FURNISHED
EXCEPT BY WRITTEN
PERMISSION OF
DYNAQUIP CONTROLS.

NO.		WaterCop Pro			FILE NO.	SUB. 281
TITLE						
WaterCop Pro Integrated Indoor						
DR	DATE	CHKD	DATE	ENGR	DATE	
MDC	07-03-25	MWS	06-23-15	MWS	06-23-15	
						