



AG4Q-H Anly Controller Owner’s Manual

[Home](#) » [ANLY](#) » AG4Q-H Anly Controller Owner’s Manual 

AG4Q-H Anly Controller



Contents

- 1 CHARACTERISTIC :
- 2 SPECIFICATION :
- 3 TYPE SELECTION :
- 4 CONNECTION :
- 5 TIMING CHART :
- 6 DIMENSIONS : (mm)
- 7 CUSTOMER SUPPORT
- 8 Documents / Resources
- 8.1 References

CHARACTERISTIC :

AG4Q-H,AG4Q-H3,AG4Q-HC, AG4Q-H,AG4Q-H3 ,AG4Q-HC, AG4Q-HC1 AG4Q-HC1

- Dual motors alternating is possible (when in AUTO mode)
- Single motor operation, motor selectable (when in MANUAL mode)

AG4Q-HS AG4Q-HS

- 1-3 input contact for motor-alternating signal
- Customized specification available

SPECIFICATION :


Operating voltage	AC(V): 12, 24, 110, 220, 240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.3S
Power consumption	Approx. 3VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C (without condensation & freezing)
Ambient humidity	MAX 85%RH (without condensation)
Altitude	MAX 2000m
Weight	Approx. 210g

TYPE SELECTION :


Type	AG4Q-H,-HC,-HC1	AG4Q-H3	AG4Q-HS
Output contact(8-5,8-6)	1a , 1a	1a , 1a	1a , 1a
Input detect delay	3S	immediate	200mS
Single contact exchange operating(1-3)	○	○	○(pluses)
Dual contact operating(1-4)	○	○	○
Exchange operating (AUTO / MANUAL)	○	○	○

CONNECTION :

AG4Q-H,AG4Q-H3,AG4Q-HS

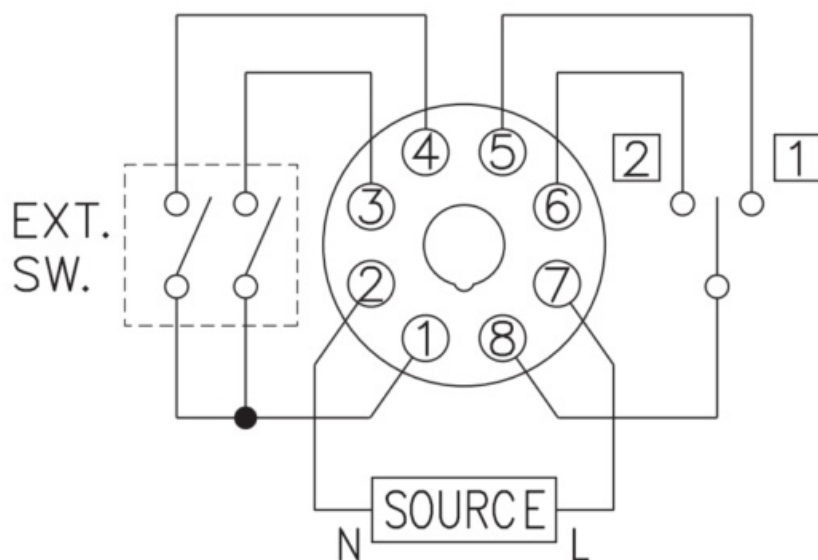


AG4Q-HC,AG4Q-HC1

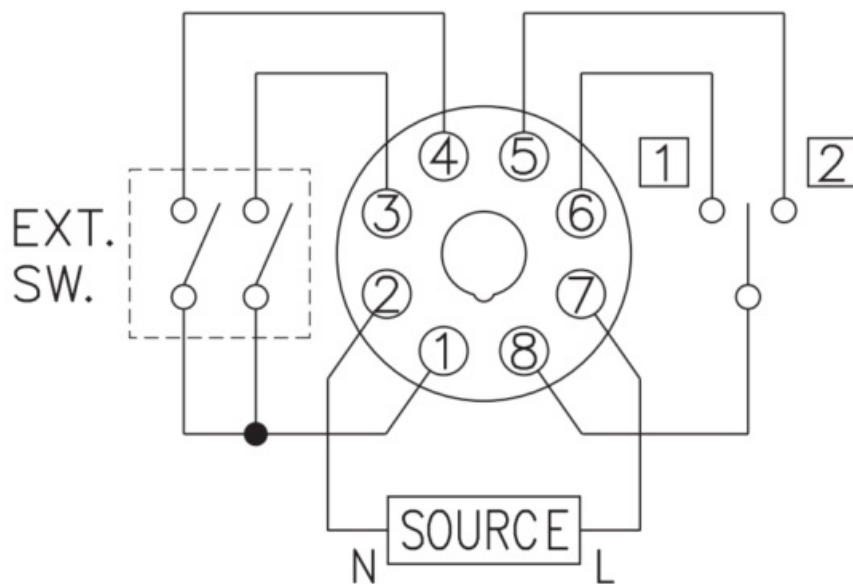


TIMING CHART :


- AG4Q-H

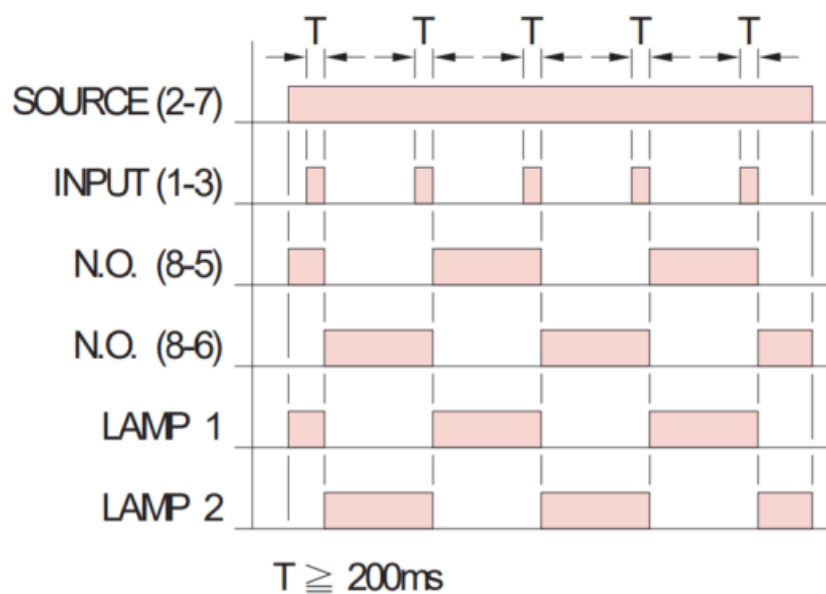


- AG4Q-H3

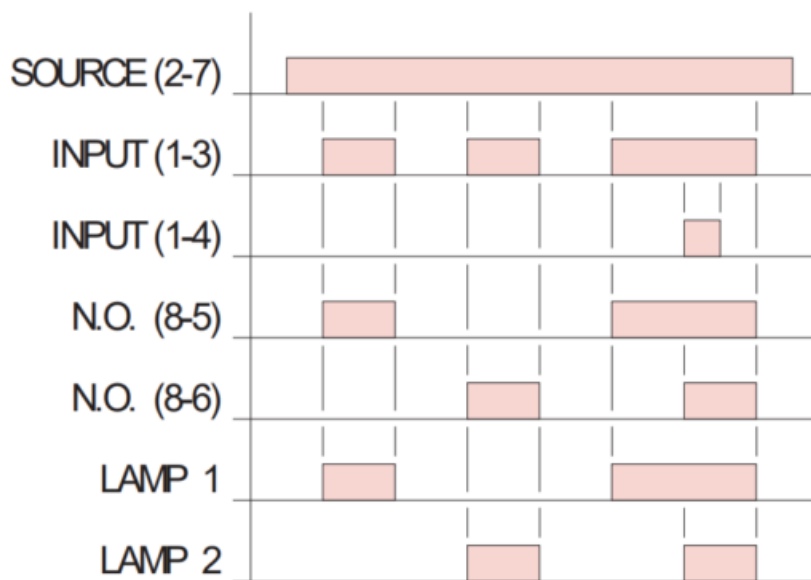


- AG4Q-HS

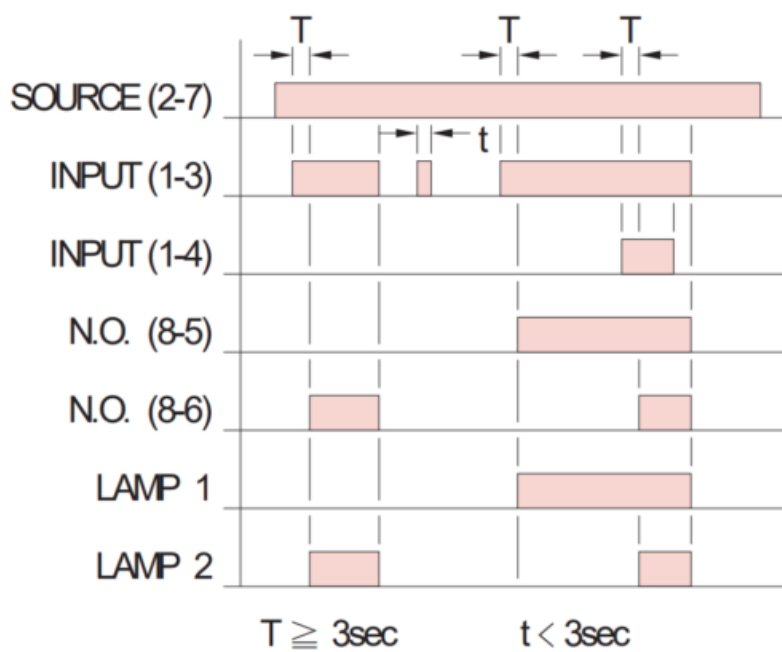

- AG4Q-HC


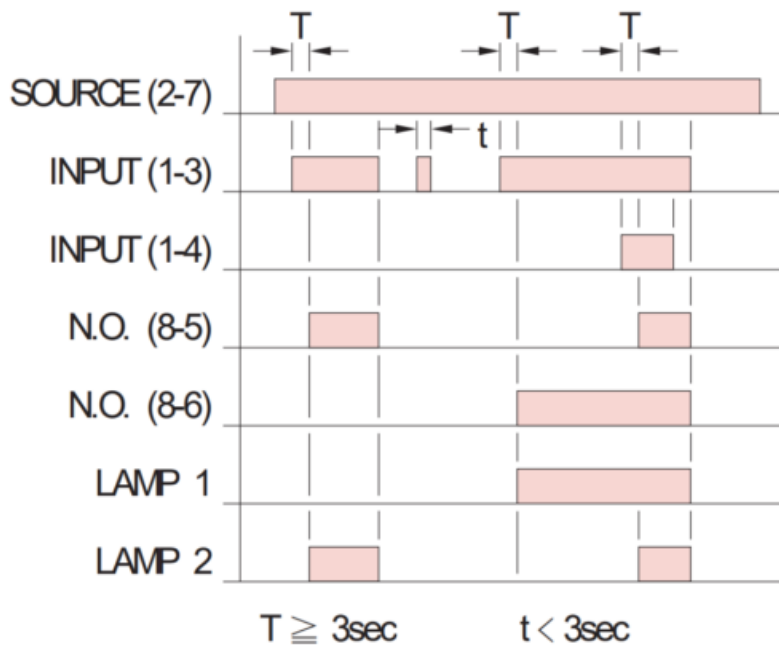


- AG4Q-HC1

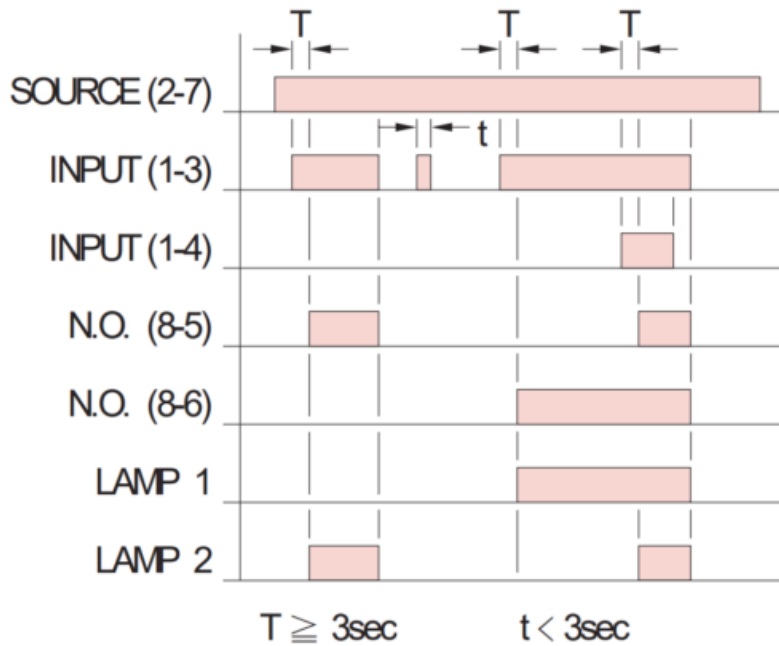

DIMENSIONS : (mm)

N type(Surface Mounting): Using 8PFA Socket

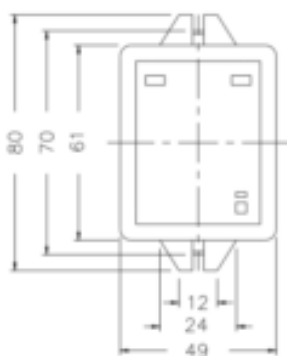

Tolerance: ± 0.1

CUSTOMER SUPPORT

ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Xinzhuang Dist., New Taipei City 242, Taiwan

TEL: +886-2-2996-3202 **FAX:** +886-2-2996-2017

HONG KONG OFFICE : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong

TEL: +852-2397-2505 **FAX:** +852-2397-6080

CHINA OFFICE : ANLY TECHNOLOGY (WUXI) CO., LTD.

2F, Building A, Plot 1, No. 28, Zhanhong Rd., Xinwu Dist., Wuxi, Jiangsu, P.R.China

TEL: +86-510-85304801~3

MALAYSIA OFFICE : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungai Besi, 57100 Kuala Lumpur, Malaysia

TEL: +60-3-7983-5758 **FAX:** +60-3-7981-5052

INDONESIA OFFICE : PT. ANLY ELECTRONICS INDONESIA

Jl. Pangeran Jayakarta 117/B9, Jakarta Pusat, 10730 Indonesia

TEL: +62-21-624-8436 **FAX:** +62-21-626-1228



Documents / Resources

	ANLY AG4Q-H Anly Controller [pdf] Owner's Manual AG4Q-H, AG4Q-H3, AG4Q-HC, AG4Q-HC1, AG4Q-HS, AG4Q-H Anly Controller, AG4Q-H, Anly Controller, Controller
---	---

References

- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.