



ArduCam B026801 Wide Angle USB Camera Module with Case User Guide

[Home](#) » [ArduCam](#) » ArduCam B026801 Wide Angle USB Camera Module with Case User Guide 

Contents

- [1 ArduCam B026801 Wide Angle USB Camera Module with Case](#)
- [2 SPECS](#)
- [3 How to use the program \(Windows demo only\)](#)
- [4 How to use the program \(Windows demo only\)](#)
- [5 INTRODUCTION](#)
- [6 QUICK START](#)
- [7 How to use the program \(Windows demo only\)](#)
- [8 How to use the program \(Windows demo only\)](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)



ArduCam B026801 Wide Angle USB Camera Module with Case



SPECS

Camera	
Sensor	1/2.8" IMX298
Resolution	16MP 4656H x 3496V
Data Format	MJPEG/YUY2
Frame rate	MJPEG 10fps@4656 x 3496/3264 x 2448/2592 x 1944; 30fps@1080P/720P/1024 x 768;YUY2 10fps@1024 x 768, 10fps@640 x 768;

Lens	
Field of View (FOV)	H=105°
Lens Mount	M12
IR Sensitivity	Integral IR filter, visible light only
Functionality and Compatibility	
Auto Controlled Features	Contrast/ Saturation/ Exposure / White balance / Acutance
System Compatibility	Win7/8/10, Linux and Mac with UVC (Android compatibility, contact us for support.)
Power	
Power Supply	DC 5V


Working Current	MAX 200mA
Physical	
Operating Temp.	-4°F~167°F (-20°C~+75°C)
Dimension	41x32x44mm
Connector No.	ZHR-4
Cable Length	3.3ft (1M)

How to use the program (Windows demo only)

he Menu bar at the top of the shown image contains few menu items and the current preview resolution and the frame rate are displayed on the bottom bar when the application is running. The following sections describe each of the menu items in detail.


Menu>Devices

This menu will show the available video devices to host PC. The B026801 named “Arducam IMX298 Camera”.


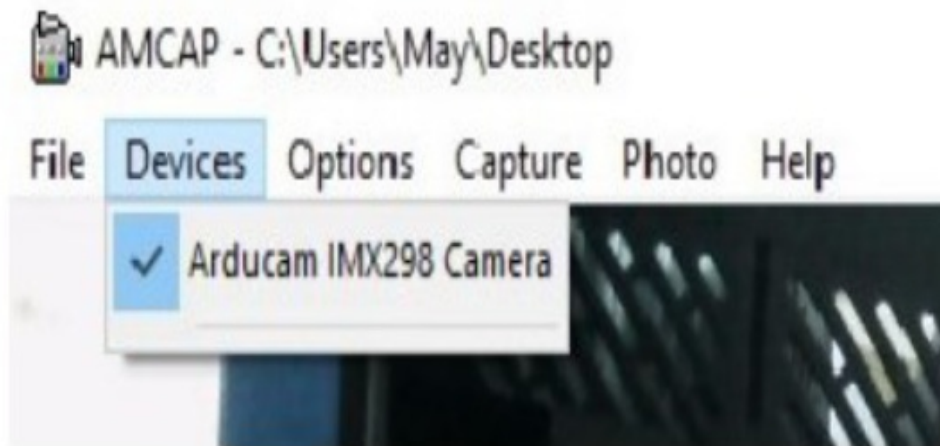


Menu>Options

The options menu can be used to select the preview and image parameters supported by this camera.

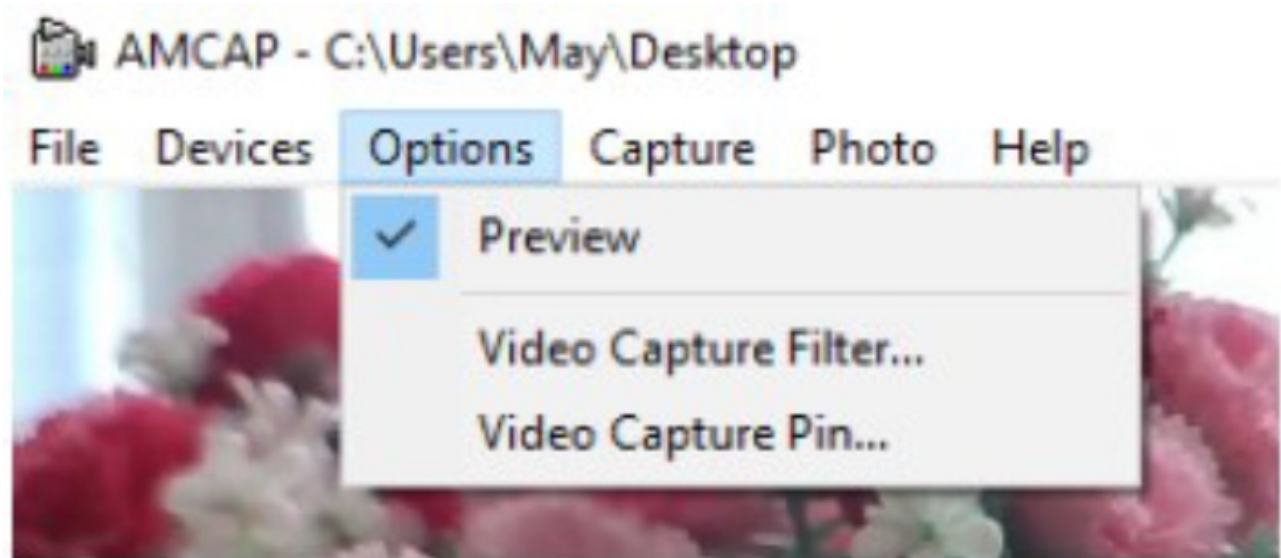

How to use the program (Windows demo only)

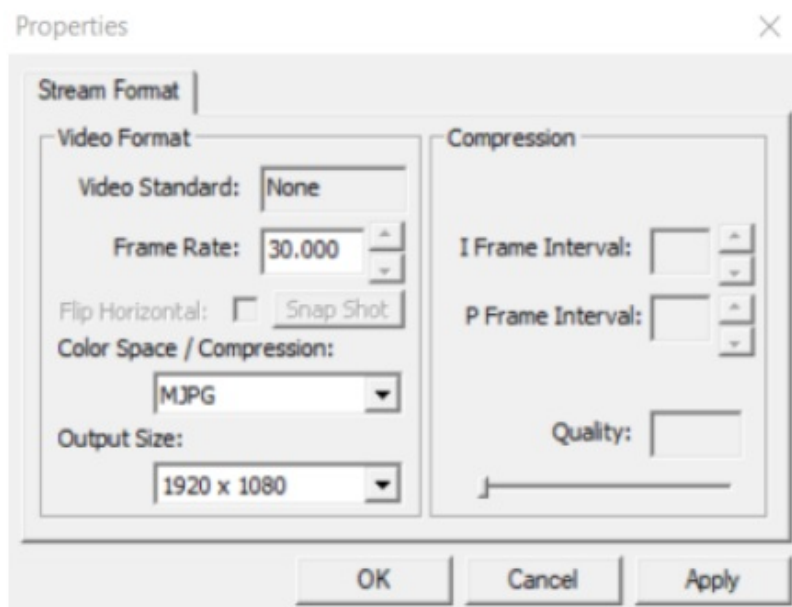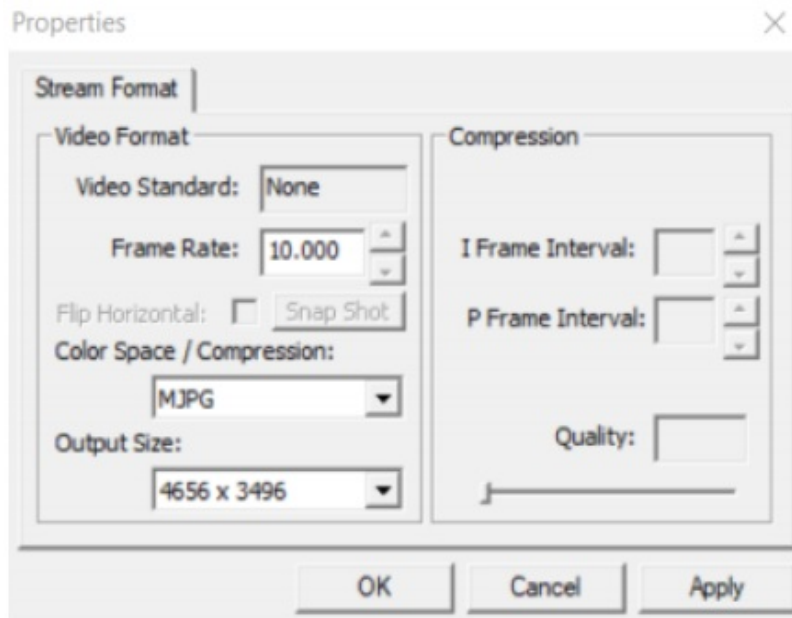

INTRODUCTION

About Arducam

Arducam has been a professional designer and manufacturer of SPI, MIPI, DVP and USB cameras since 2012. We also offer customized turnkey design and manufacturing solution services for customers who want their products to be unique.

About this USB Camera

The B026801 is a new member of the Arducam's USB camera family. It's an 16MP, UVC compliant, wide angle, M12 USB 2.0 camera. This USB camera is based on the 1/2.8" Sony IMX298 image sensor, and you can read more about its specs in the next chapter. Ar-ducam also provides the sample application that demonstrates some of the features of this camera.

About UVC

The B026801 is a UVC-compliant camera. The native UVC drivers of Windows, Linux and Mac shall be compatible with this camera so that it does not require extra drivers to be installed.

About Customer Service

If you need our help or want to customize other mod-els of USB cameras, feel free to contact us at support@arducam.com

QUICK START

How to download the program

Download the APP Amcap from the following link <https://www.arducam.com/downloads/app/AMCap.exe>

NOTE:


1. For Mac OS, please open the native software facetime and select the video camera "USB Camera" .
2. If used with the Andriod device, USB Camera APP and connect adapter are needed.

How to connect the camera

Connect the one end of the USB cable to the connect-or provided on the back of B026801, and connect the other end to the USB 2.0 host controller on the computer.

How to use the program (Windows demo only)


Video Capture Filter -> Video Proc Amp/Camera Control

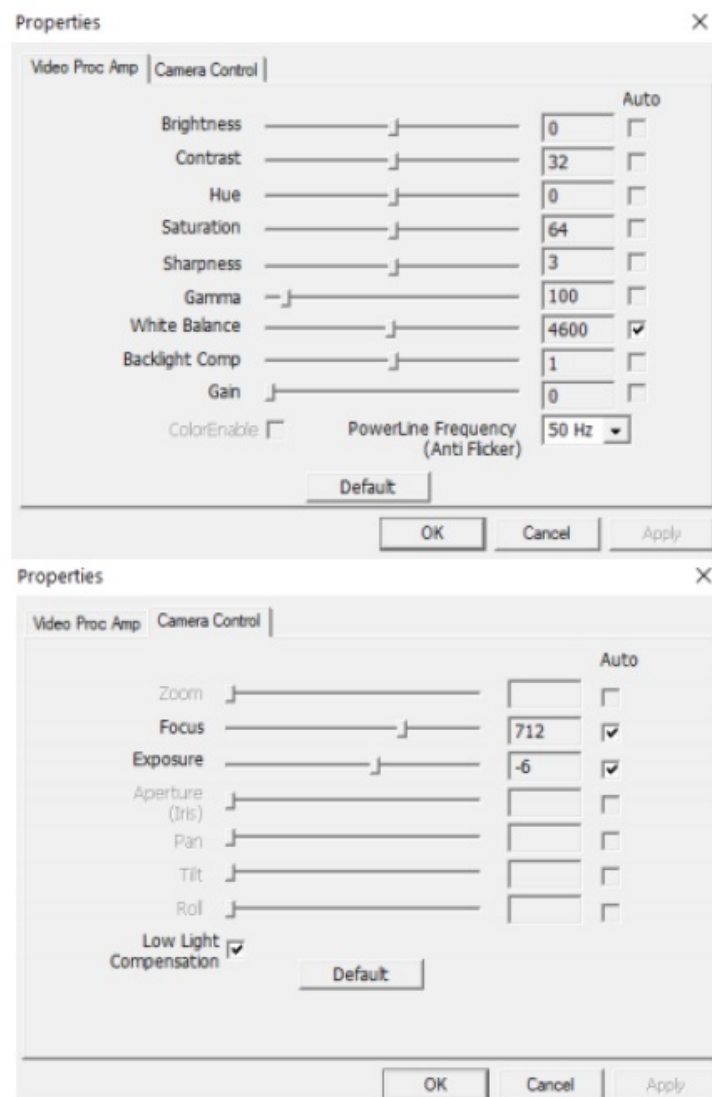


How to use the program (Windows demo only)

Menu> Capture

The capture menu is used to capture the still image and video by using this application. You can also select the related parameters.

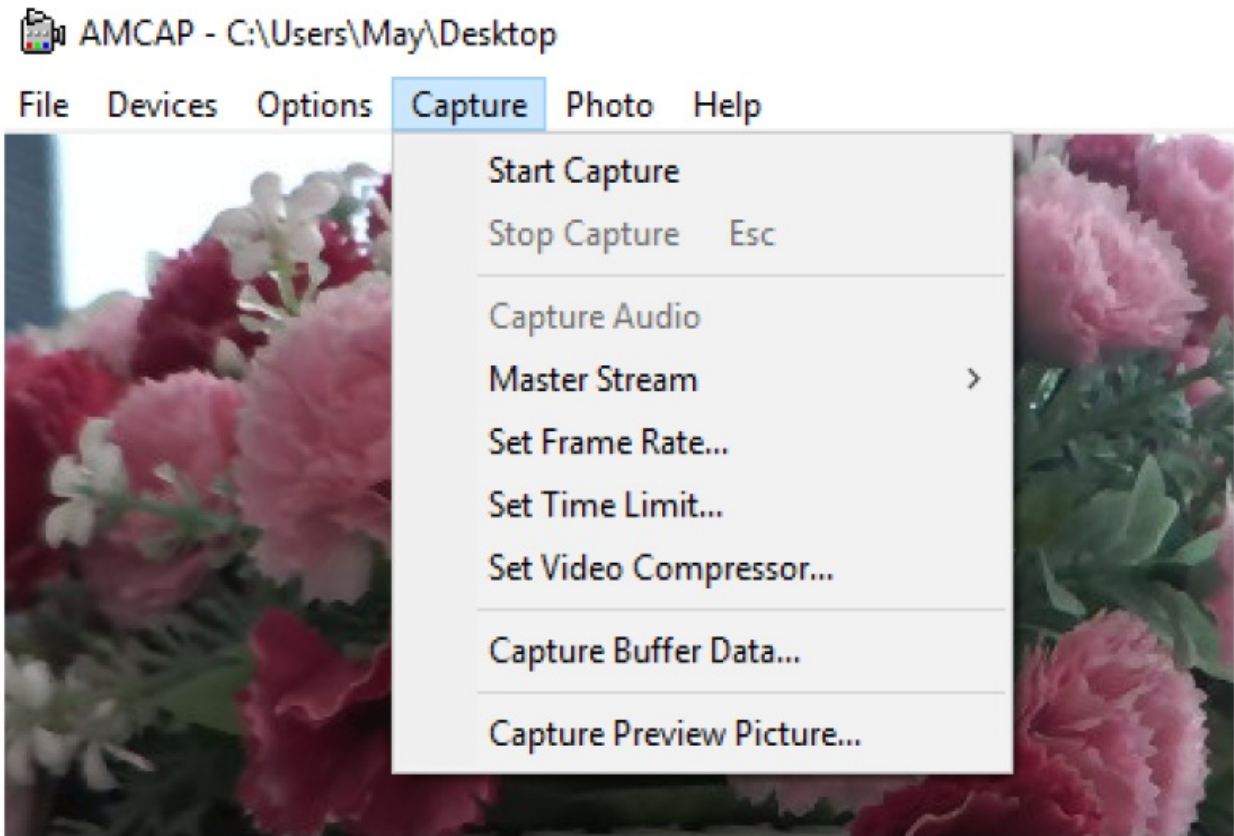

Documents / Resources

	ArduCam B026801 Wide Angle USB Camera Module with Case [pdf] User Guide B026801, Wide Angle USB Camera Module with Case
---	--