



ArduCam B0322 USB Global Shutter Low Distortion Camera Module User Guide

[Home](#) » [ArduCam](#) » ArduCam B0322 USB Global Shutter Low Distortion Camera Module User Guide 



USB Global Shutter Low
Distortion Camera Module



2MP OV2311
(SKU: B0322)
QUICK START GUIDE

Contents

1 INTRODUCTION

2 SPECS

3 QUICKSTART

4 How to use the program (Windows demo only)

5 How to use the program (Windows demo only)

6 How to use the program (Windows demo only)

7 How to use the program (Windows demo only)

8 Documents / Resources

9 Related Posts

INTRODUCTION

• About Arducam

Arducam has been a professional designer and manufacturer of SPI, MIPI, DVP, and USB cameras since 2012. We also offer customized turnkey design and manufacturing solution services for customers who want their products to be unique.

• About this USB Camera

The B0322 is a new member of Arducam's USB camera family. It's a 2MP monochrome global shutter, UVC compliant, low distortion USB 2.0 camera. This USB camera is based on the 1/2.9" OV2311 image sensor, and you can read more about its specs in the next chapter. Arducam also provides a sample application that demonstrates some of the features of this camera.

• About UVC

The B0322 is a UVC-compliant camera. The native UVC drivers of Windows, Linux, and Mac shall be compatible with this camera so that it does not require extra drivers to be installed.

• About Customer Service

If you need our help or want to customize other models of USB cameras, feel free to contact us at support@arducam.com

SPECS

Camera	
Sensor	Monochrome global shutter OV2311
Optical Size	1/2.9 inch
Resolution	2MP 1600 x 1200
Data Format	MJPEG/YUY2
Pixel Size	3μm*3μm
Dynamic Range	68DB
Frame rate	MJPEG: switchable, up to 50fps@1600 x 1200/1280 x 960/720P/800 x 600/640 x 480/320 x 240 YUY2: 5fps@1600 x 1200/720P/800 x 600.

Lens	
Field of View (FOV)	75°(H)
Lens Mount	M12*P0.5 mm
IR Sensitivity	No IR filter, sensitive to IR

Functionality and Compatibility	
Auto Controlled Features	Exposure/ White balance
System Compatibility	Win7/8/10, Linux, Mac, and OS with UVC driver

Power	
Power Supply	DC 5V
Working Current	MAX 200mA

Physical	
Operating Temp.	-4°F~158°F (-20°C~+70°C)
Dimension	38x38mm
Cable Length	Default 3.3ft (1M)

QUICKSTART

- How to download the program Download the APP Amcap from the following link

<https://www.arducam.com/downloads/app/AMCap.exe>

NOTE: For Mac OS, please open the native software facetime and select the video camera “Arducam OV2311 USB Camera”


- How to connect the camera Connect the one end of the USB 2.0 cable to the USB 2.0 connector provided on the back of B0322, and connect the other end to the USB 2.0 host controller on the computer.

How to use the program (Windows demo only)

The Menu bar at the top of the shown image contains a few menu items and the current preview resolution and the frame rate are displayed on the bottom bar when the application is running. The following sections describe each of the menu items in detail.


- Menu>Devices**

This menu will show the available video devices to host PC. The B0322 named “Arducam OV2311 USB Camera”.

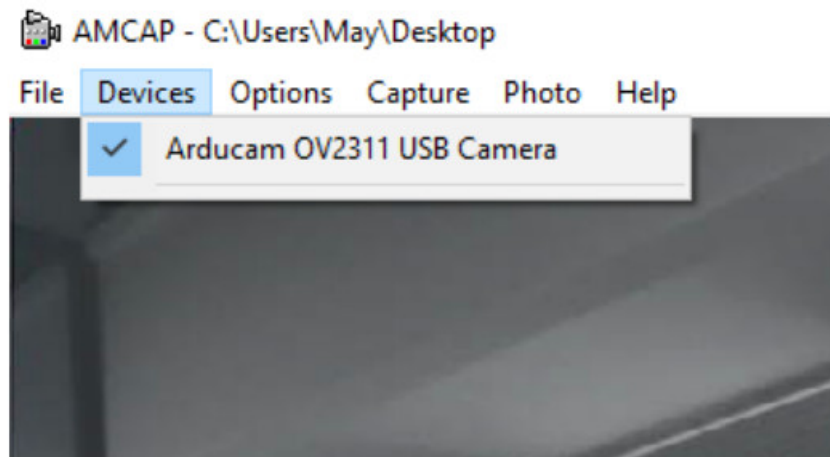


- **Menu>Options**

The options menu can be used to select the preview and image parameters supported by this camera.

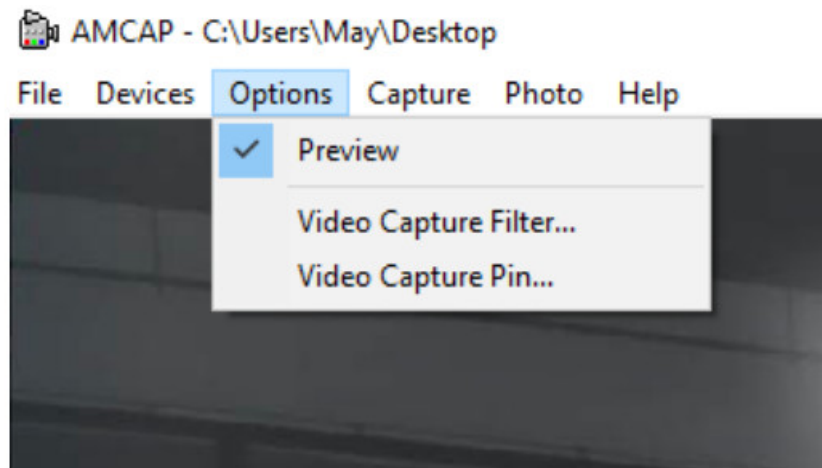


How to use the program (Windows demo only)

– Video Capture Filter -> Video Proc Amp/Camera Control

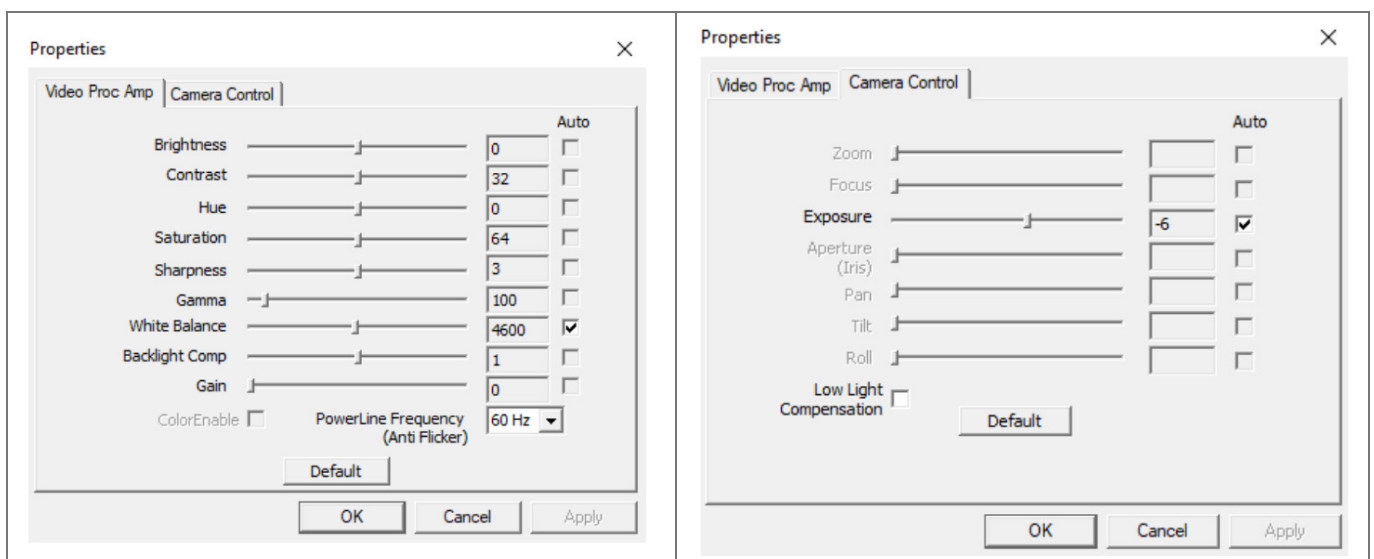

How to use the program (Windows demo only)


– Video Capture Pin

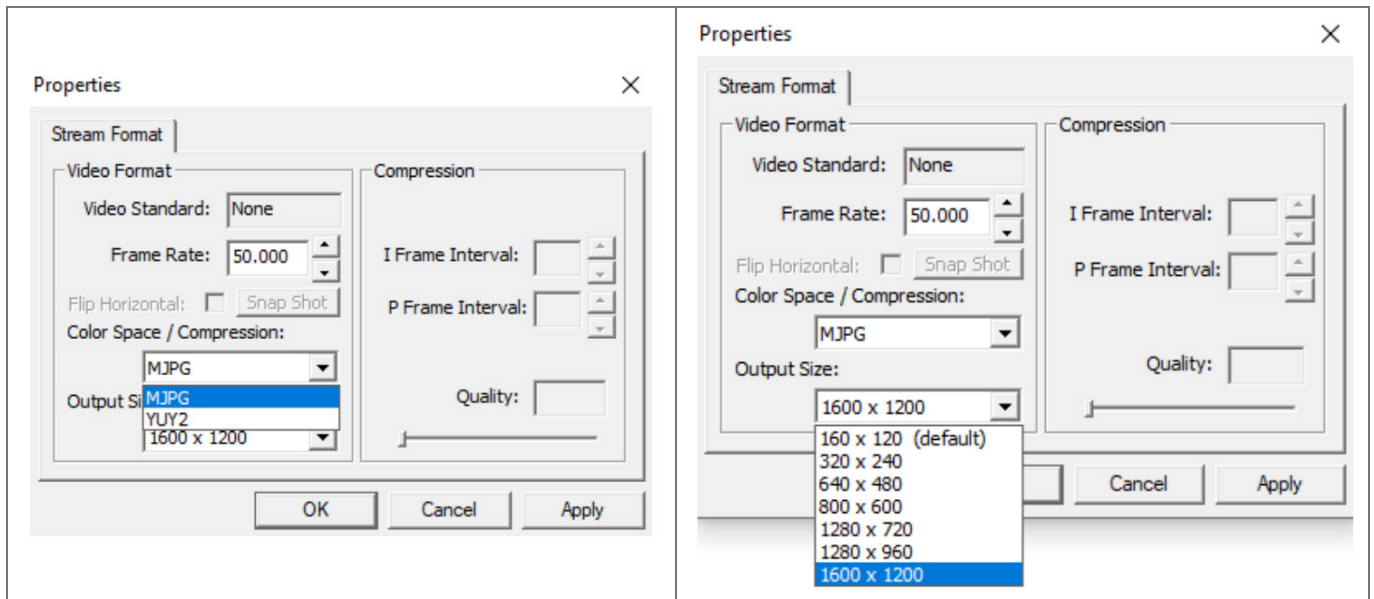

How to use the program (Windows demo only)

• Menu> Capture

The capture menu is used to capture the still image and video by using this application. You can also select the related parameters.

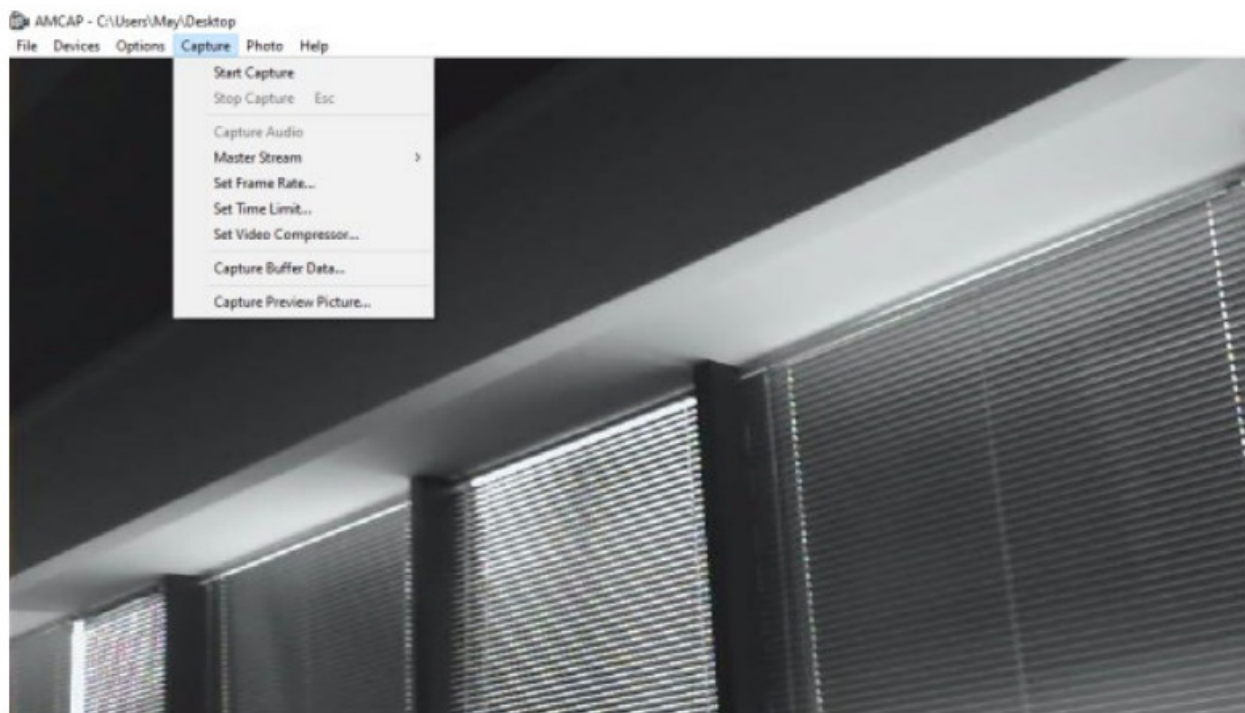


NOTE:

1. This camera module supports trigger via an external signal;
2. This camera module can also output a Strobe signal.

Please refer to the Doc page to get the details

<https://www.arducam.com/docs/uv-cameramodule/access-camera-demo/how-to-accessarducam->

Documents / Resources

	<p>ArduCam B0322 USB Global Shutter Low Distortion Camera Module [pdf] User Guide B0322, USB Global Shutter Low Distortion Camera Module, B0322 USB Global Shutter Low Distortion Camera Module</p>
---	---