


artika FLP14-C-MKC Skylight Ultra-Thin LED Panel Instruction Manual

[Home](#) » [artika](#) » artika FLP14-C-MKC Skylight Ultra-Thin LED Panel Instruction Manual 



ITM. / ART. 1229097
Model : FLP14-C-MKC
Ultra-Thin LED Panel – Skylight™

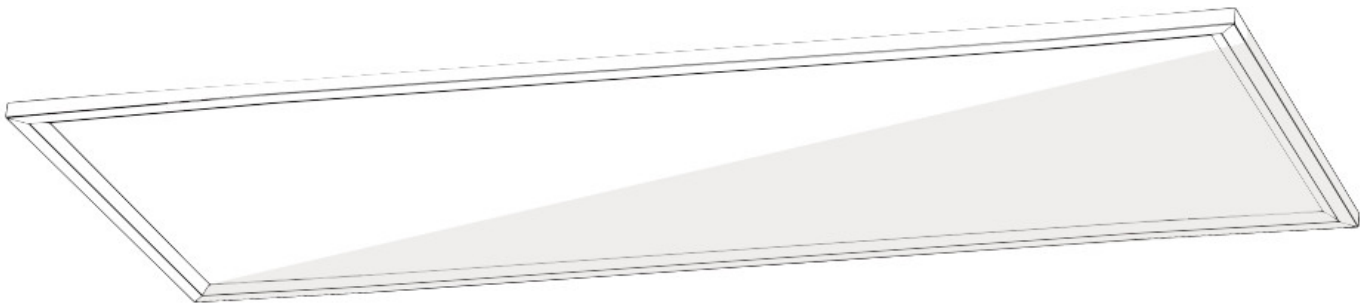

INSTRUCTION MANUAL







Contents

- 1 IMPORTANT, KEEP FOR FUTURE REFERENCE: PLEASE READ CAREFULLY.
- 2 INCLUDED
- 3 WHAT YOU WILL NEED...
- 4 IMPORTANT
- 5 INSTALLATION ON GYPSUM CEILING, SURFACE MOUNTING
- 6 REPLACEMENT PARTS
- 7 WARRANTY
- 8 Canada (IC)
- 9 Documents / Resources
- 10 Related Posts


IMPORTANT, KEEP FOR FUTURE REFERENCE: PLEASE READ CAREFULLY.

The light source of this light fixture is not replaceable; when the light source reaches the end of its life, the entire light fixture must be replaced.

INCLUDED

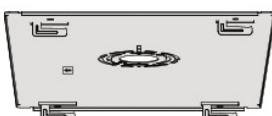Item	Description	Quantity
	Junction box screw	x 2
	Wire connector	x 3
	Retaining screw	x 4
	Wall anchor	x 4
	Mounting plate	x 1
	LED panel with 2 wired hooks	x 1

WHAT YOU WILL NEED...



Screwdriver



Drill



Pencil



1/4-in. drill bit (6.5 mm)

CAUTION

If using a dimmer, it must be LED compatible.

IMPORTANT

The installer and/or user must read, understand and follow these instructions before installing the product. This product must be properly installed before it is used. If instructions are not followed, the manufacturer will not be held responsible for any problems or product malfunction. Failure to follow installation and/or operating instructions voids the warranty.

We recommend that this product be installed by a certified electrician. In some states or provinces, it is a legal requirement for this type of product to be installed by a certified electrician, according to the electrical and building codes effective in the region where the unit is used.

This product is compatible with most LED dimmers



WARNING:

Risk of electrical shock.

Turn off breaker at the panel.

Switch off the main electrical supply from the fuse box/circuit breaker before installing the unit or doing any maintenance.

Do not use outdoor.



WARNING:


Risk of electrical shock.

Turn off breaker at the panel.

INSTALLATION ON GYPSUM CEILING, SURFACE MOUNTING


1. Turn off power at the circuit breaker and the light switch. Ensure the power is off before continuing.
2. Install the mounting plate temporarily on the junction box using the two junction box screws. Place the mounting plate so that the arrow label points to the left

fig . 1 a

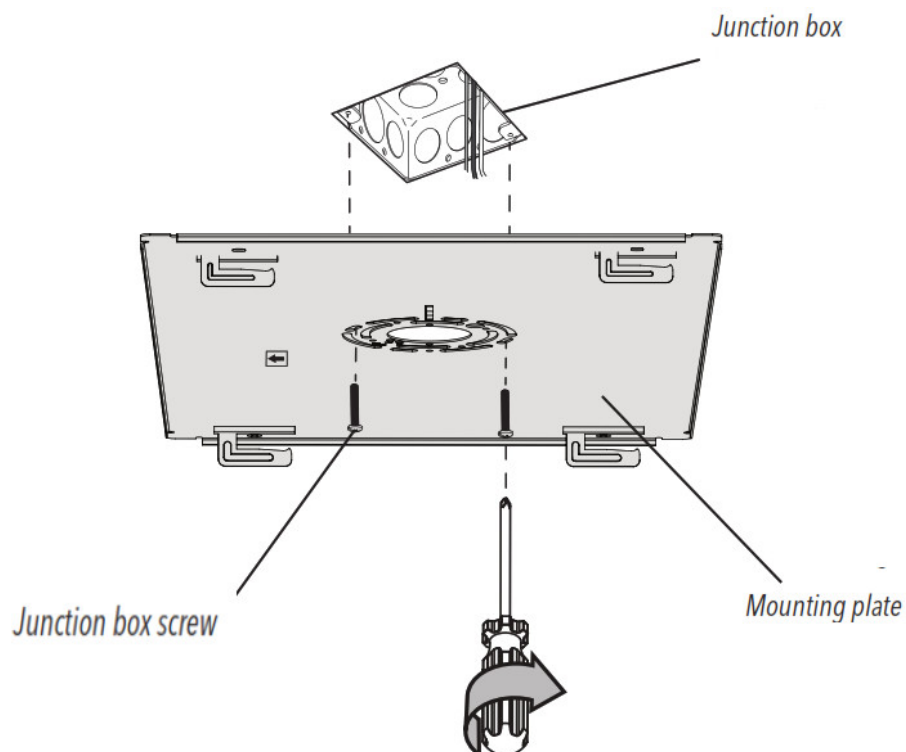


3. Place marks on the ceiling where the support screw holes are located. Unscrew the junction box screws and remove the mounting plate.

fig. 1b

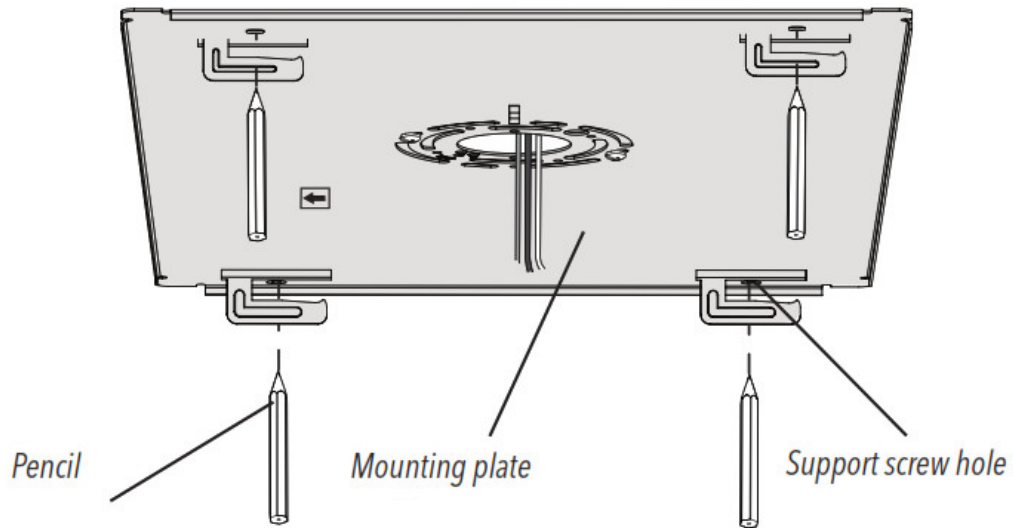


4. Drill pilot holes in the ceiling with a $\frac{1}{4}$ in (6.5 mm) drill bit. Push wall anchors into the holes (fig . 1 c) .

fig . 1 c

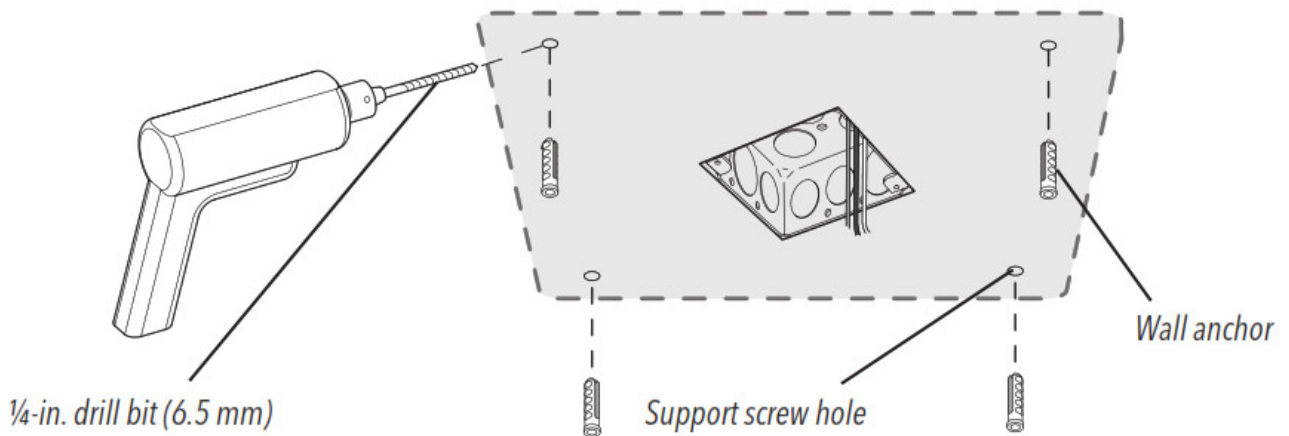


5. Place the mounting plate so that the arrow label points to the left. Install the mounting plate to the junction box using the 2 junction box screws. Screw the retaining screws into the wall anchors (fig . 1d).

fig . 1 d

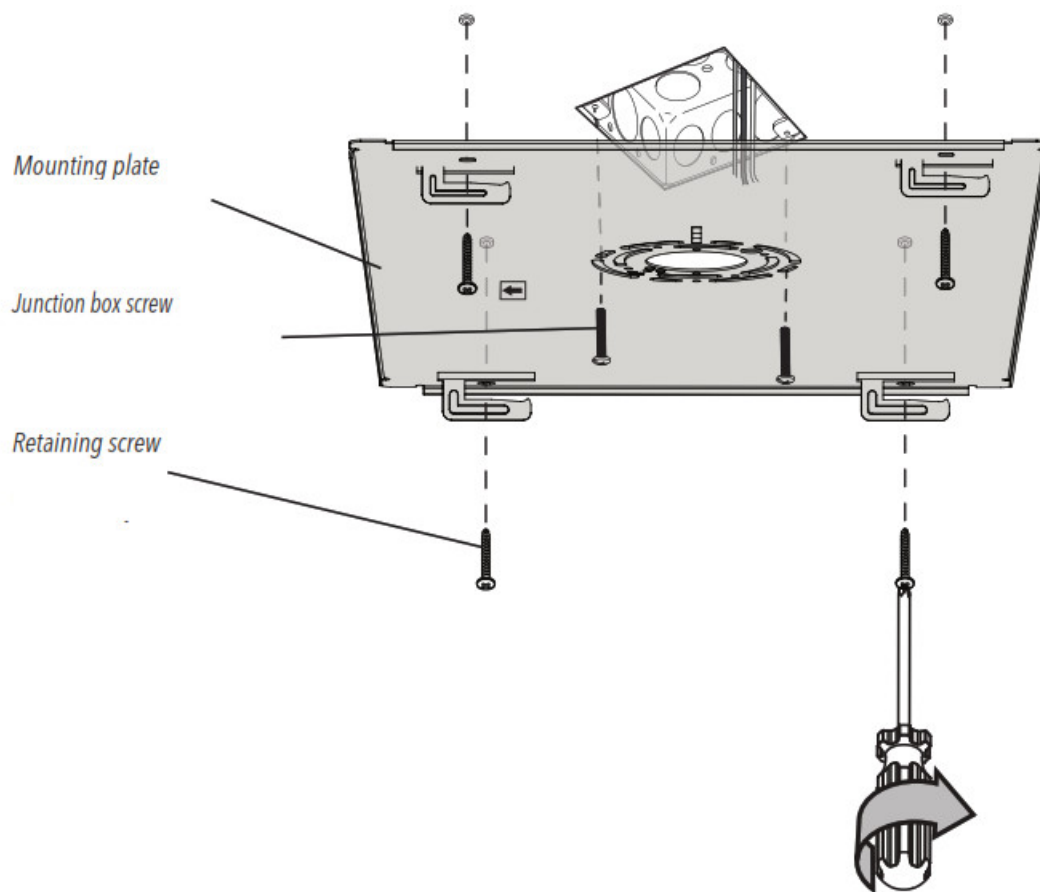

6. .Place the LED panel under the mounting plate making sure that the arrow points to the left and in the same direction as the mounting plate.
7. Suspend the LED panel in the air using the wired hooks by fixing them to the notch of the mounting plate (fig . 2).
8. Connect the white wire (N) from the light fixture to the white supply wire (N) from the junction box using a wire connector. Connect the black wire (L) from the light fixture to the black supply wire (L) from the junction box using a wire connector. Connect the ground wire (G) from the light fixture to the ground supply wire (G) from the junction box using a wire connector (fig . 2).

fig . 2

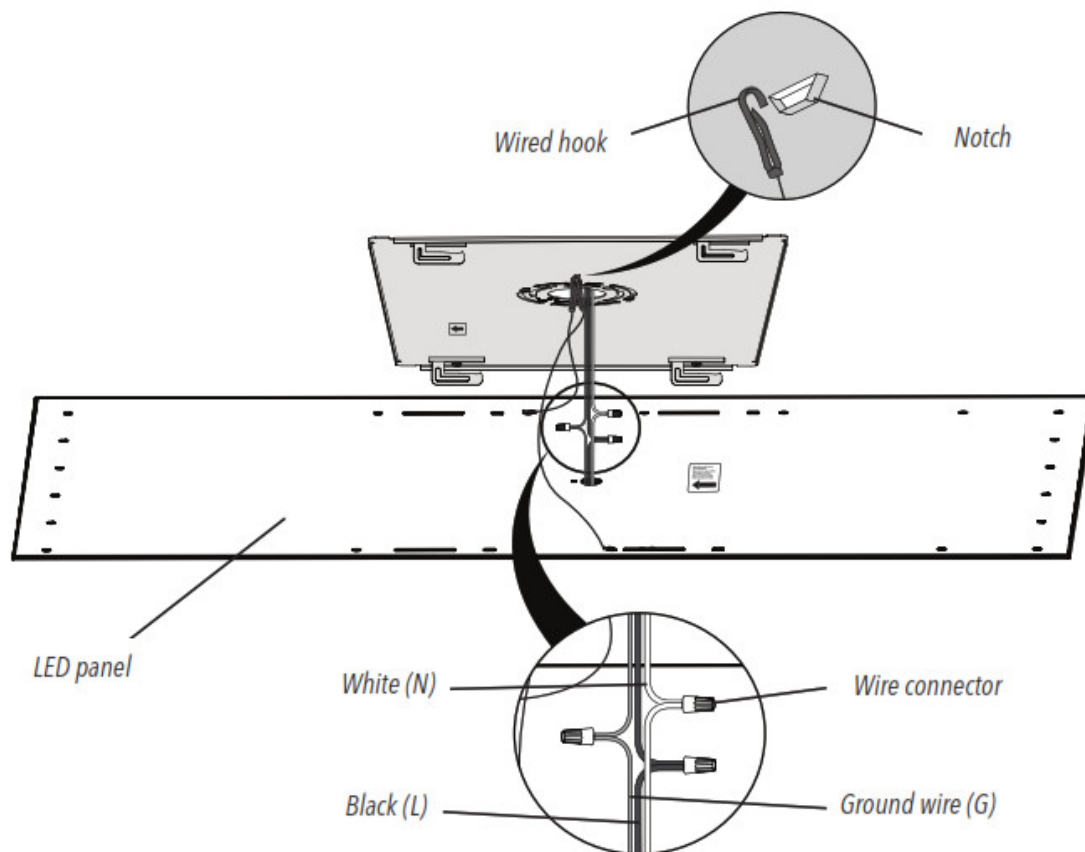

9. Locate the slots on the LED panel and the metal anchors on the mounting plate. Lift the LED panel and insert the anchors of the back first inside the slots (fig. 3a).
10. Lift the front of the LED panel. The metal anchors of the mounting plate should now automatically align with the slots of the LED panel (fig 3b).

fig . 3 a


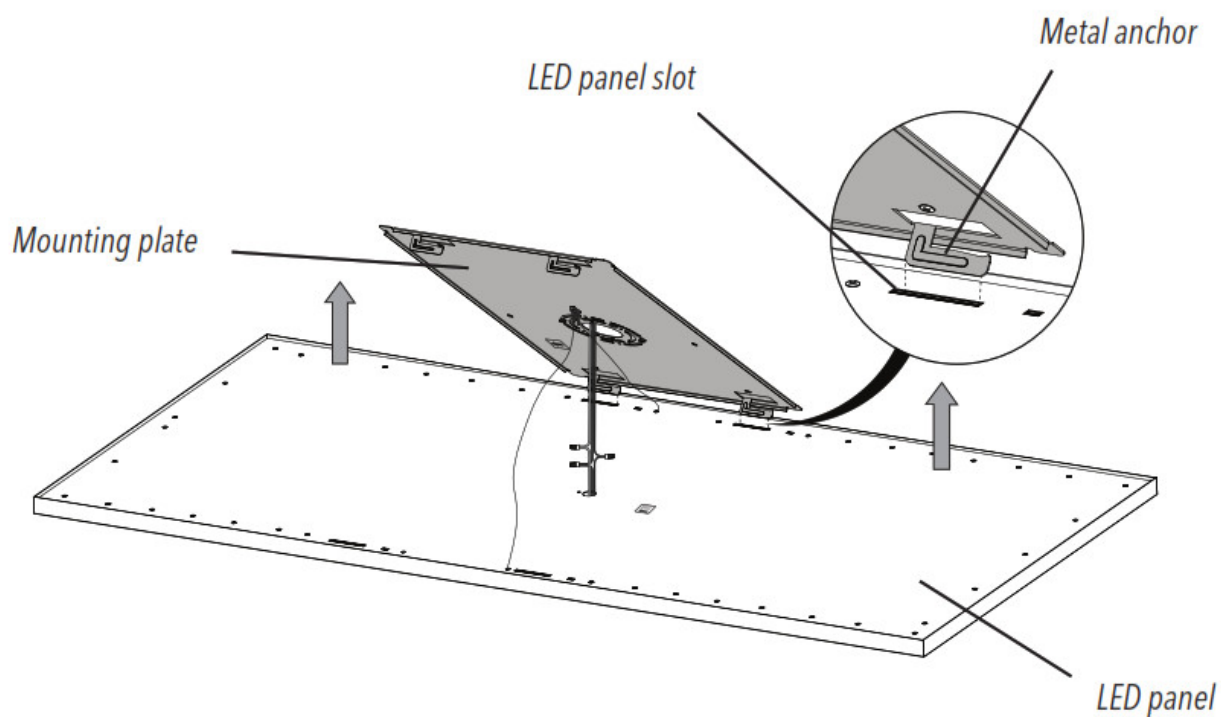


fig. 3b

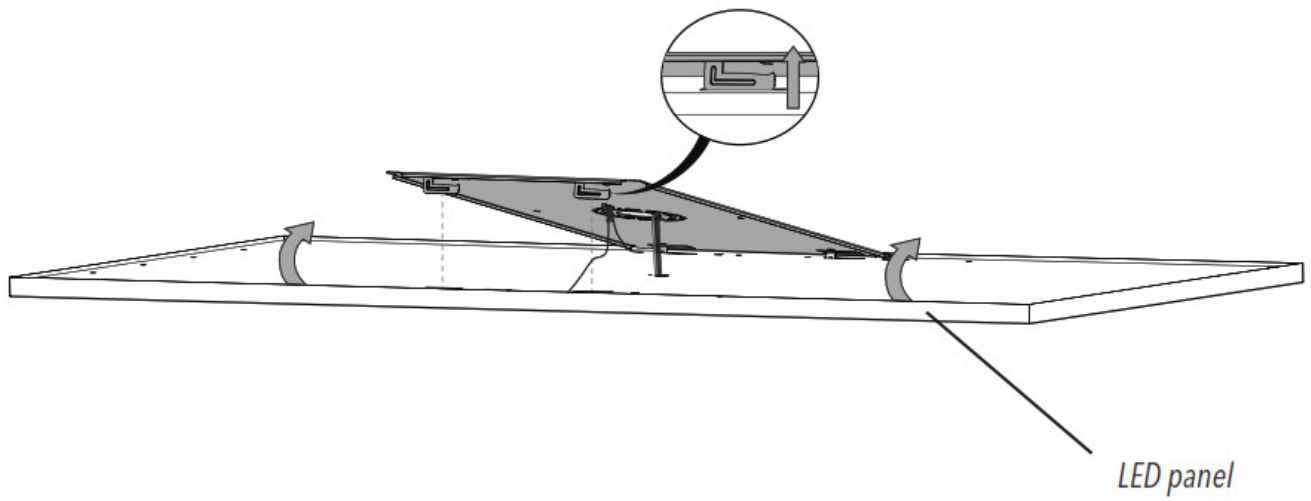

11. Push the LED panel toward the ceiling (fig. 3c) and slide it to the left to secure it in place using the metal anchors (fig. 3d).
12. Release the panel (fig. 3e) and restore electrical power.

fig. 3c


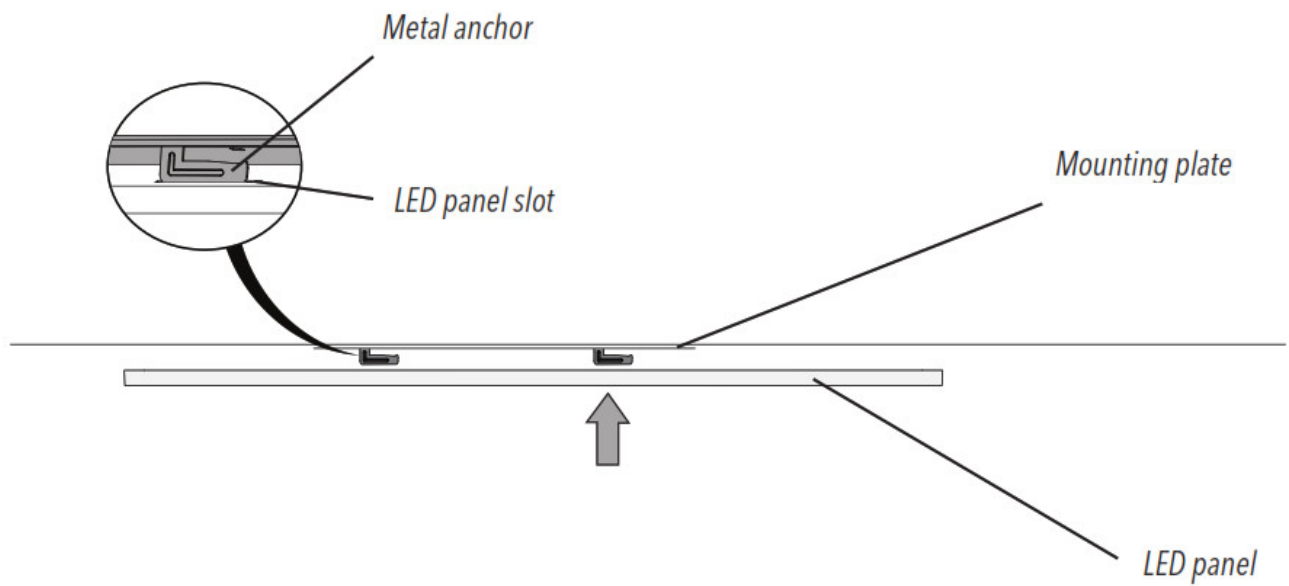


fig. 3d & fig. 3e

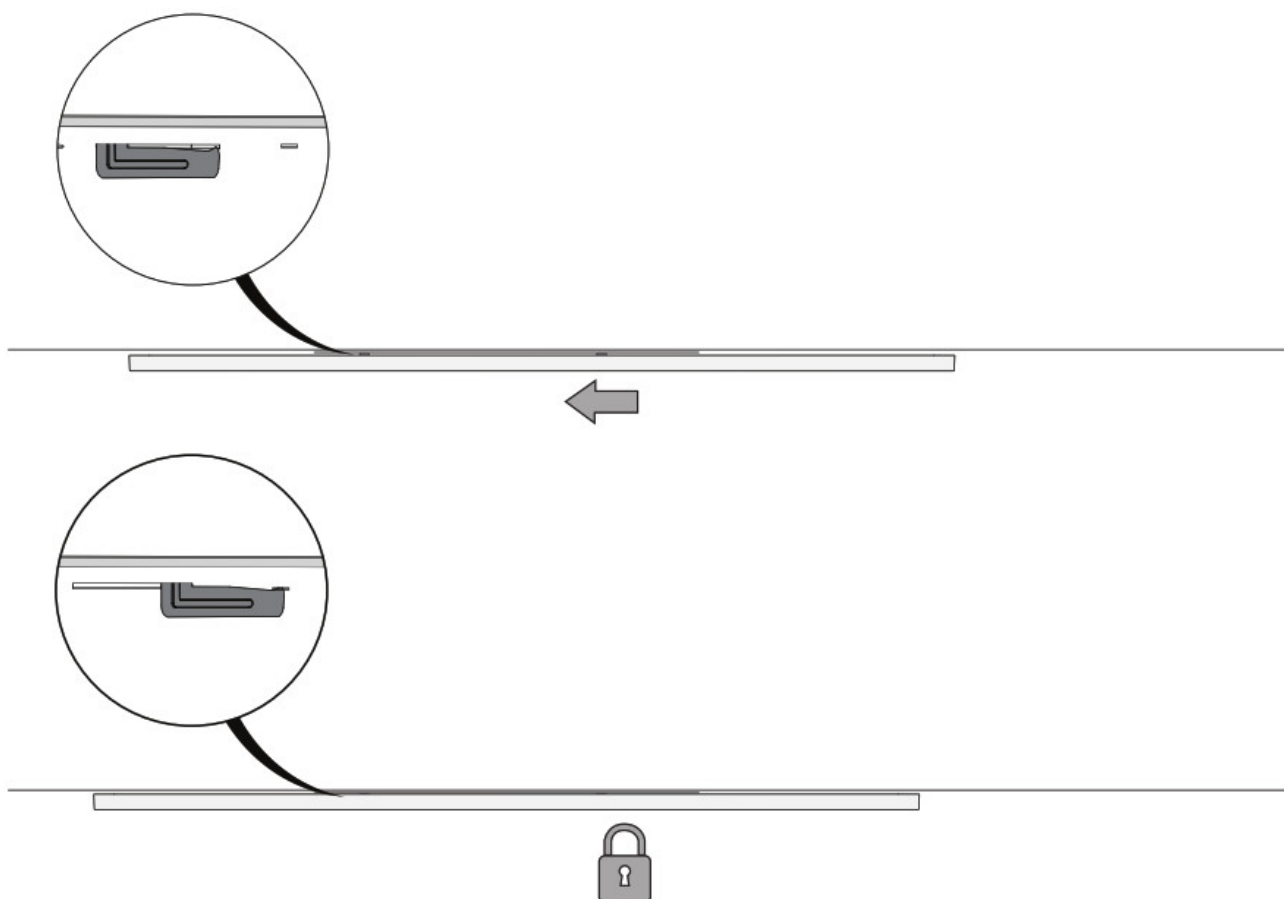

REPLACEMENT PARTS

Item	Description	Artika #
 x 2  x 3  x 4  x 4	Hardware kit	FLP14/KIT

TO ORDER REPLACEMENT PARTS, PLEASE CONTACT CUSTOMER SERVICE.

(Service available only in the USA and Canada)

WARRANTY

Artika For Living Inc. is proud to offer you a five (5) years limited warranty on manufacturing defects from the date of purchase for residential use only. The warranty is extended to the original owner in USA and Canada and is non-transferable. It does not apply to retailers, commercial applications, or establishments. The original sales receipt is required for all warranty claims. The remedy under this limited warranty shall be product or part replacement at Artika's discretion as provided herein and cannot exceed the original purchase price.

This warranty is valid only on products installed in accordance with the building code and laws effective in the region where the unit is used as well as in accordance with the provided instruction manual. It does not cover products installed incorrectly or subjected to abnormal use. Product(s) or component part(s) may be required to be returned for inspection and verification.

Normal wear and tear, misuse, negligence, vandalism, improper maintenance (surface damage due to chemical

interaction or cleaning agents including, but not limited to, scouring pads, use of cleaners containing abrasives, alcohol, or other organic solvents) improper handling, accident, abuse, fire, flood, theft, acts of God, neglect, or alteration of the product will not be covered under this limited warranty. It excludes any accessories that accompany the product including but not limited to bulbs or batteries.

The warranty does not cover handling, labor, transportation, or any other cost associated with the installation or replacement of the product. This limited warranty is valid in the country of purchase and by Artika authorized retailers only.

Artika for Living Inc. will not be held responsible for any direct or consequential damages or injuries related to the use of this product arising from improper use or installation of this product.

Please visit www.artika.com to discover more about **Artika for Living Inc.**

Canada (IC)

Operation is subject to the following two conditions:

1. this device may not cause interference, and
2. this device must accept any interference, including interference that may cause undesired operation of the device.

USA (FCC)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. this device may not cause harmful interference; and
2. this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on. The user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

<p>Distributed by: Costco Wholesale Corporation P.O. Box 34535 Seattle, WA 98124-1535 USA 1-800-774-2678 www.costco.com</p>	<p>Customer Service Monday to Friday 9 a.m. – 5 p.m. EST1-866-661-9606 support@artika.com www.artika.com</p>
--	---



Made in Cambodia



Documents / Resources

	<p>artika FLP14-C-MKC Skylight Ultra-Thin LED Panel [pdf] Instruction Manual FLP14-C-MKC, FLP14CMKC, 2AUHG-FLP14-C-MKC, 2AUHGFLP14CMKC, FLP14-C-MKC Skylight Ultra-Thin LED Panel, Skylight Ultra-Thin LED Panel</p>
--	---