



## artika FLP14-SRC-C-O Sunray Ultra Thin LED Panel Instruction Manual

[Home](#) » [artika](#) » artika FLP14-SRC-C-O Sunray Ultra Thin LED Panel Instruction Manual 






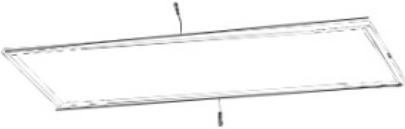
artika FLP14-SRC-C-O Sunray Ultra Thin LED Panel Instruction Manual



### Contents


- [1 Included](#)
- [2 INSTALLATION ON DRYWALL CEILING, SURFACE MOUNTING](#)
- [3 ADJUSTING THE COLOUR TEMPERATURE](#)
- [4 FCC Statement](#)
- [5 WARRANTY](#)
- [6 Customer Service](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

### Included


Item	Description	Quantity
	Junction box screw	×2
	Wire connector	×3
	Retaining screw	×6
	Wall anchor	×6
	Mounting plate	×1
	LED panel with 2 wired hooks	×1

## What You Will Need


- Screwdriver



- Drill



- Pencil



- 1/4-in drill bit (6.5 mm)



**CAUTION** If using a dimmer, it must be LED compatible.

**IMPORTANT** The installer and/or user must read, understand and follow these instructions before installing the product. This product must be properly installed before it is used. If instructions are not followed, the manufacturer will not be held responsible for any problems or product malfunctions. Failure to follow installation and/or operating instructions will void the warranty. We recommend that this product be installed by a certified electrician. In some states or provinces, it is legally required that for this type of product to be installed by a certified electrician, according to the electrical and building codes effective in the region where the unit is being used.

**This product is compatible with most LED dimmers**



**WARNING:**

**Risk of electrical shock. Turn off power at the breaker panel.**

Switch off the main electrical supply from the fuse box/circuit breaker before installing the unit or doing any maintenance.


Do not use outdoors.

**WARNING:** Risk of electrical shock. Turn off power at the breaker panel.

## **INSTALLATION ON DRYWALL CEILING, SURFACE MOUNTING**


1. Turn off power at the breaker panel and the light switch. Ensure that the power is turned off before continuing.
2. Temporarily install the mounting plate to the junction box using the two junction box screws. Position the mounting plate so that the arrow label is pointing to the left (fig. 1a)

fig. 1a

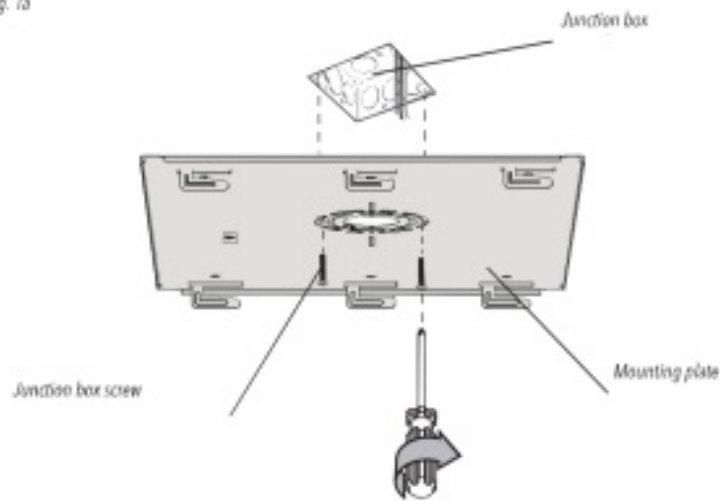


3. Place marks on the ceiling where the support screw holes are located (fig. 1b). Unscrew the junction box screws and remove the mounting plate.

fig. 1b

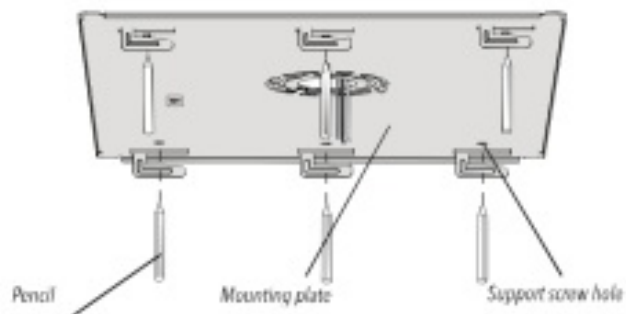


4. Drill pilot holes in the ceiling with a 1/4 in (6.5 mm) drill bit. Push the wall anchors into the holes (fig. 1c).

fig. 1c

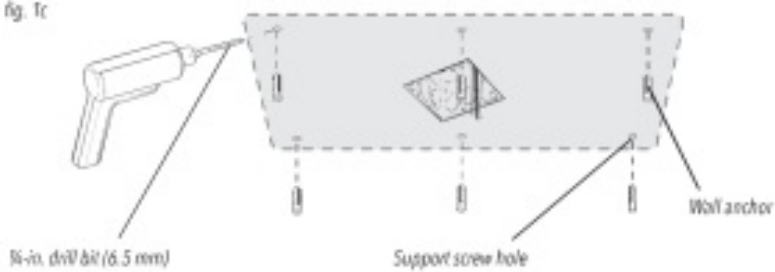


5. Position the mounting plate so that the arrow label is pointing to the left. Install the mounting plate to the junction box using the 2 junction box screws. Screw the retaining screws into the wall anchors (fig. 1d).

fig. 1d

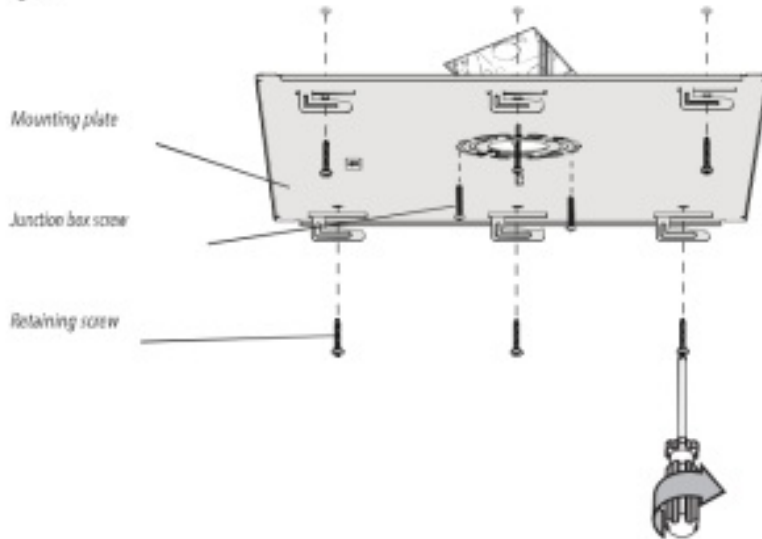


6. Place the LED panel under the mounting plate making sure that the arrow label is also pointing to the left.
7. Suspend the LED panel from the ceiling using the wired hooks by fixing them to the notches on the mounting plate (fig. 2).
8. Connect the white wire (N) from the light fixture to the white supply wire (N) from the junction box using a wire connector. Connect the black wire (L) from the light fixture to the black supply wire (L) from the junction box using a wire connector. Connect the ground wire (G) from the light fixture to the ground supply wire (G) from the junction box using a wire connector (fig. 2).

fig. 2

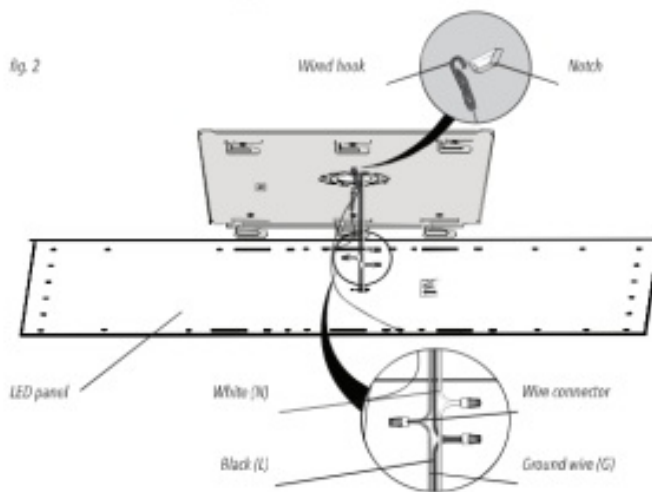


9. Locate the slots on the LED panel and the metal anchors on the mounting plate. Lift the LED panel and insert the back anchors into the corresponding slots (fig. 3a).

fig. 3a

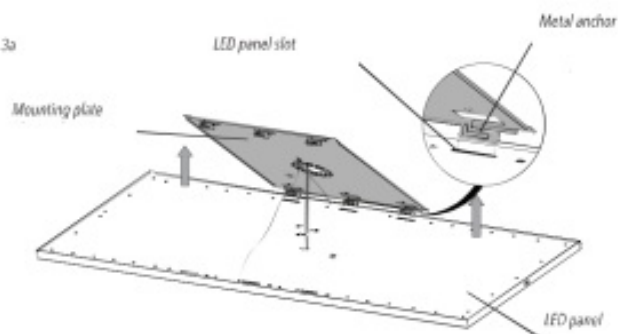

10. Lift the front of the LED panel. The metal anchors on the mounting plate should now automatically align with the slots on the LED panel (fig 3b).

fig. 3b

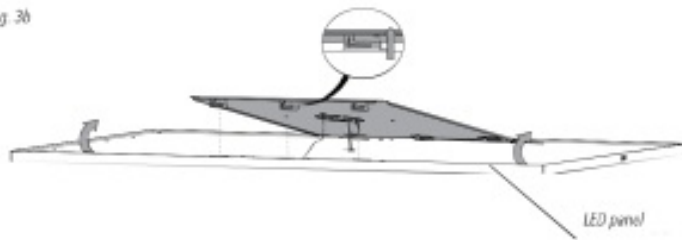

11. Push the LED panel toward the ceiling (fig. 3c) and then slide it to the left to secure it in place using the metal anchors (fig. 3d).

fig. 3c



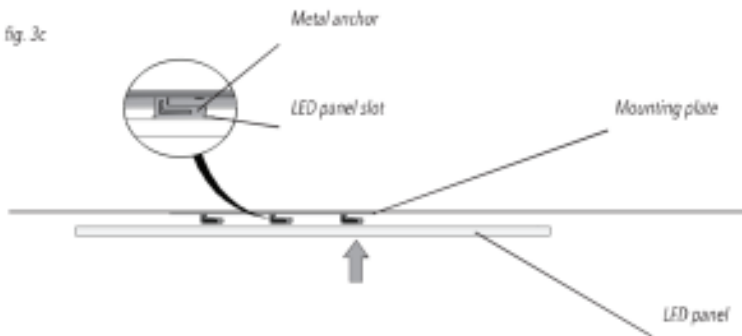


fig. 3d

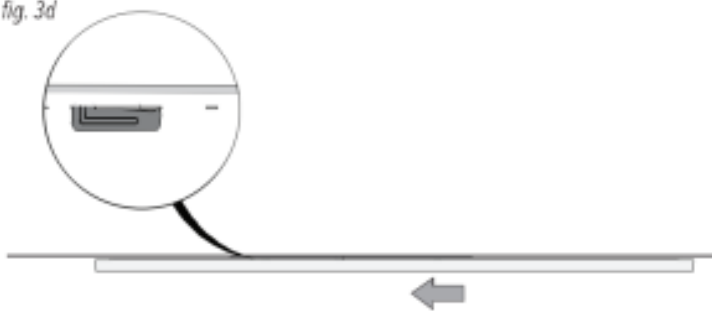

12. Release the panel (fig. 3e) and restore electrical power.


fig. 3e

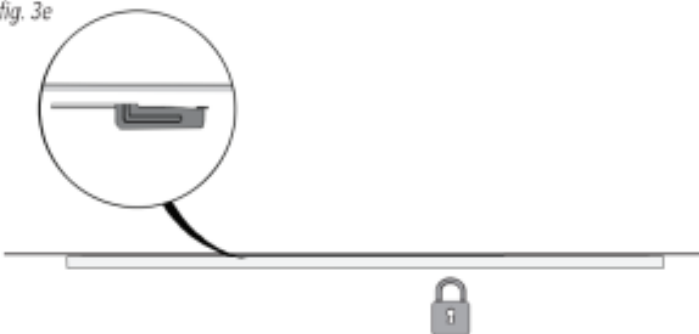

## ADJUSTING THE COLOUR TEMPERATURE

Choose the colour temperature that you like best and then remove the protective film (fig. 4).

fig. 4

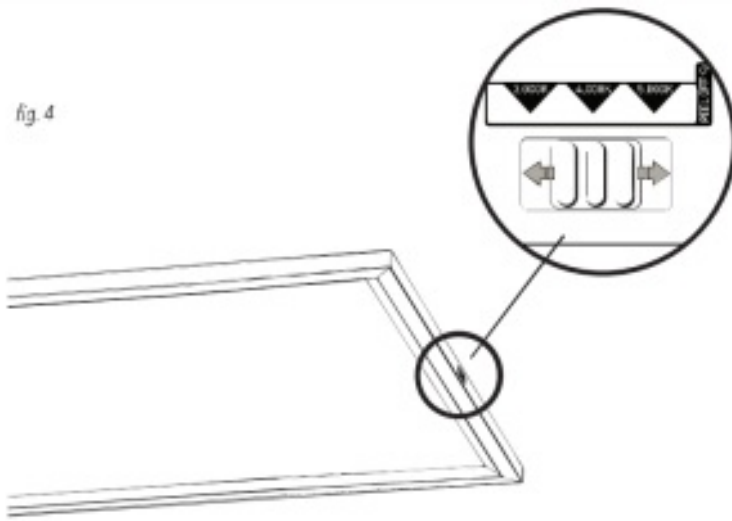

#### Operation is subject to the following two conditions:

1. this device does not cause interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

#### FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1. this device does not cause harmful interference; and 2. this device must accept any interference received, including interference that may cause undesired operation.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on. The user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### WARRANTY

**Artika For Living Inc.** is proud to offer you a three-year (3) limited warranty on manufacturing defects from the date of purchase for residential use only. The warranty is extended to the original owner in USA, Canada, Mexico, UK, Iceland, France and Spain and is non-transferable. It does not apply to retailers, commercial applications or establishments. The original sales receipt is required for all warranty claims. The remedy under this limited warranty shall be product or part replacement at Artika's discretion as provided herein and cannot exceed the original purchase price.

This warranty is valid only on products installed in accordance with the building code and laws effective in the region where the unit is being used as well as in accordance with the provided instruction manual. It does not cover products installed incorrectly or subjected to abnormal use. Product(s) or component part(s) may be required to be returned for inspection and verification.

Normal wear and tear, misuse, negligence, vandalism, improper maintenance (surface damage due to chemical interaction or cleaning agents including, but not limited to, scouring pads, use of cleaners containing abrasives, alcohol or other organic solvents) improper handling, accident, abuse, fire, flood, theft, acts of God, neglect, or alteration of the product will not be covered under this limited warranty. It excludes any accessories that accompany the product including but not limited to bulbs or batteries.

The warranty does not cover handling, labour, transportation, or any other cost associated with the installation or replacement of the product. This limited warranty is valid in the country of purchase and by Artika authorized retailers only.

**Artika for Living Inc.** will not be held responsible for any direct or consequential damages or injuries related to the use of this product arising from improper use or installation of this product.

Please visit [www.artika.com](http://www.artika.com) to discover more about Artika for Living Inc.


**Artika for Living Inc 1756, 50th Avenue**

**Customer Service**

**Phone:** 1-866-661-9606  
**Email:** [support@artika.com](mailto:support@artika.com)  
**Website:** [www.artika.com](http://www.artika.com)

Monday to Friday  
9 a.m – 5 p.m. EST

**Documents / Resources**

	<a href="#">artika FLP14-SRC-C-O Sunray Ultra Thin LED Panel</a> [pdf] Instruction Manual FLP14, 2AYFP-FLP14, 2AYFPFLP14, FLP14-SRC-C-T, FLP14-SRC-C-O, FLP14-SRC-C-O Sunray Ultra Thin LED Panel, Sunray Ultra Thin LED Panel, Ultra Thin LED Panel, LED Panel
---	--