



artika PDT-SWR Swirl Pendant LED Light Fixture Instruction Manual

[Home](#) » [artika](#) » artika PDT-SWR Swirl Pendant LED Light Fixture Instruction Manual 



Model: PDT-SWR

Pendant LED Light Fixture – Swirl™

INSTRUCTION MANUAL

IMPORTANT, KEEP FOR FUTURE REFERENCE: PLEASE READ CAREFULLY.








Made in China
Residential use only
Indoor use only


Contents

- [1 INCLUDED](#)
- [2 WHAT YOU WILL NEED...](#)
- [3 HEIGHT ADJUSTMENT](#)
- [4 STEP-BY-STEP
INSTALLATION](#)
- [5 REPLACEMENT PARTS](#)
- [6 WARRANTY](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

INCLUDED

Item	Description
	Junction box screw
	Wire connector
	Mounting Bracket
	Canopy screw
	Pendant LED light fixture with canopy assembled

WHAT YOU WILL NEED...

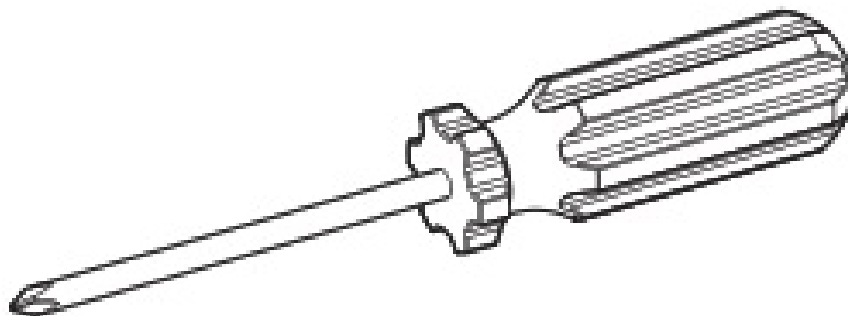

Screwdriver

CAUTION

If using a dimmer, it must be LED compatible

IMPORTANT

The installer and/or user must read, understand and follow these instructions before installing the product. This product must be properly installed before it is used. If instructions are not followed, the manufacturer will not be held responsible for any problems or product malfunction. Failure to follow installation and/or operating instructions voids the warranty.

We recommend that this product be installed by a certified electrician. In some states or provinces, it is a legal requirement for this type of product to be installed by a certified electrician, according to the electrical and building codes effective in the region where the unit is used. This product is compatible with most LED dimmers

**WARNING:**

Risk of electrical shock.

Turn off the breaker at the panel. Switch off the main electrical supply from the fuse box/circuit breaker before installing the unit or doing any maintenance. Do not use outdoor.

HEIGHT ADJUSTMENT

NOTE: It is recommended to make any major adjustments to the height of the light fixture before installation.

1. With the power off, measure the distance from the ceiling to the bottom of where you would like your light fixture to hang.
2. To retract the wire, gently push it into the light fixture base (fig. 1).
3. To extend the wire, push the metal collar while gently pulling the wire down (fig. 2). When the metal collar is released, the wire will be fixed into position.
4. Once the wire is at the desired length, turn the fixture over and slide the plastic wire retainer up to the wire nut, to prevent the pendant from slipping down when in use.

fig. 1


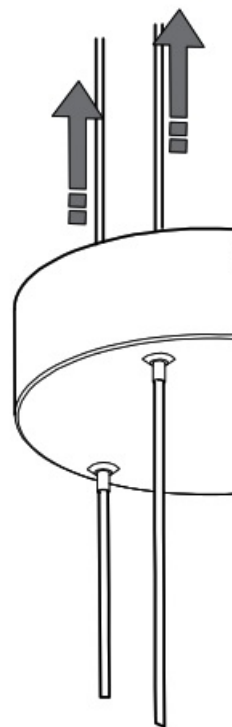


fig. 2
Plastic wire retainer

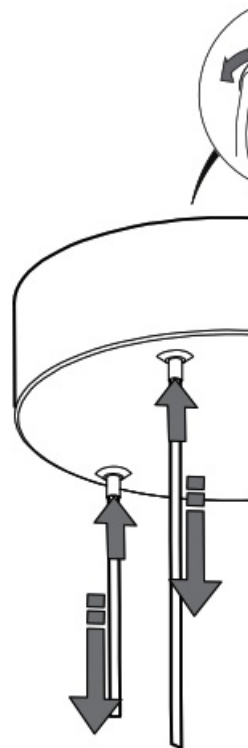


WARNING:

Risk of electrical shock. Turn off the breaker at the panel.

STEP-BY-STEP INSTALLATION


1. Turn off power at the circuit breaker and the light switch. Ensure the power is off before continuing.
2. Install the mounting bracket on the junction box using the junction box screws (fig. 3).
- 3.

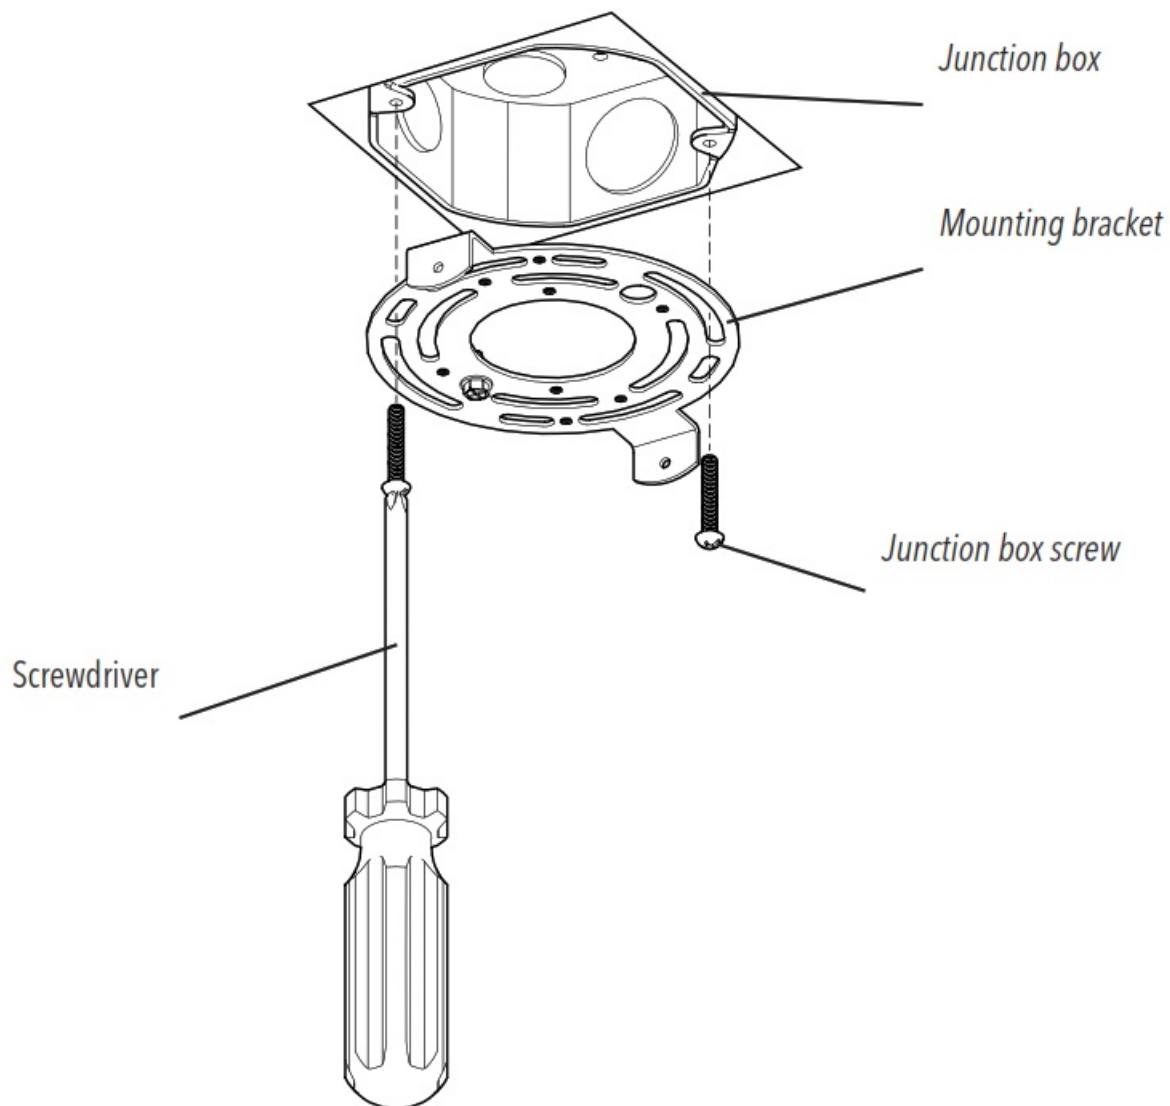

Connect the white wire (N) from the light fixture to the white supply wire (N) from the junction box using a wire connector. Connect the black wire (L) from the light fixture to the black supply wire (L) from the junction box using a wire connector. Connect the ground wire (G) from the light fixture to the ground supply wire (G) from the junction box using a wire connector (fig. 4).

4. Put the wires into the canopy.
5. Mount the canopy onto the mounting bracket and secure it with the canopy screw.

REPLACEMENT PARTS

Item	Description	A
 <p>× 2 × 3</p> <p>× 2</p>	Hardware kit	PDT-SWR/K

TO ORDER REPLACEMENT PARTS, PLEASE CONTACT CUSTOMER SERVICE.
(Service available only in the USA and Canada).

Operation is subject to the following two conditions:

1. this device may not cause interference, and
2. this device must accept any interference, including interference that may cause undesired operation of the device.

WARNING:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for Class B digital devices, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception. However, there is no guarantee that interference will not occur in a particular installation. If this equipment causes harmful interference to radio or television reception, which can be determined by turning the equipment off and on,

the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARRANTY

Artika For Living Inc. is proud to offer you a three (3) years limited warranty on manufacturing defects from the date of purchase for residential use only. The warranty is extended to the original owner in USA and Canada and is non-transferable. It does not apply to retailers, commercial applications or establishments. The original sales receipt is

required for all warranty claims. The remedy under this limited warranty shall be a product or part replacement at Artika's discretion as provided herein and cannot exceed the original purchase price.

This warranty is valid only on products installed in accordance with the building code and laws effective in the region where the unit is used as well as in accordance with the provided instruction manual. It does not cover products installed incorrectly or subjected to abnormal use. Product(s) or component part(s) may be required to be returned for inspection and verification.

Normal wear and tear, misuse, negligence, vandalism, improper maintenance (surface damage due to chemical interaction or cleaning agents including, but not limited to, scouring pads, use of cleaners containing abrasives, alcohol or other organic solvents) improper handling, accident, abuse, fire, flood, theft, acts of God, neglect, or alteration of the product will not be covered under this limited warranty. It excludes any accessories that accompany the product including but not limited to bulbs or batteries.

The warranty does not cover handling, labor, transportation, or any other cost associated with the installation or replacement of the product. This limited warranty is valid in the country of purchase and by Artika authorized retailers only.

Artika for Living Inc. will not be held responsible for any direct or consequential damages or injuries related to the use of this product arising from improper use or installation of this product. Please visit www.artika.com to discover more about **Artika for Living Inc.**

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio

communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is onnected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Artika For Living Inc.
1756 50th ave, Lachine,
QC H8T 2V5, Canada
Customer Service
Monday to Friday
9 a.m. – 5 p.m. EST
1-866-661-9606
support@artika.com
www.artika.com

Documents / Resources

 <p>The image shows the cover of the instruction manual for the Artika PDT-SWR Swirl Pendant LED Light Fixture. It features the Artika logo at the top left, followed by the title 'PDT-SWR Swirl Pendant LED Light Fixture' in multiple languages. Below the title, there is a line drawing of the light fixture, which has a long, thin, curved stem and a circular, swirling light shade at the bottom. At the bottom left, there is a small circular logo with the letters 'E' and 'C' inside, and some text below it.</p>	<p>artika PDT-SWR Swirl Pendant LED Light Fixture [pdf] Instruction Manual PDT-SWR, PDT-SWR, 2AUHG-PDT-SWR, 2AUHGPDTSWR, PDT-SWR Swirl Pendant LED Light Fixture, PDT-SWR, Swirl Pendant LED Light Fixture</p>
--	--

References

-  [Modern Lighting Fixtures | Best Online Lighting Store | Artika](#)