

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [SKYLINK](#) /

› [Skylink SC-1000 Complete Wireless Alarm System User Manual](#)

SKYLINK SC-1000

Skylink SC-1000 Complete Wireless Alarm System User Manual

Model: **SC-1000** | Brand: **SKYLINK**



1. INTRODUCTION

The Skylink SC-1000 Complete Wireless Alarm System is designed to provide comprehensive security for homes, offices, and businesses. Utilizing advanced rolling-code technology, this system offers enhanced security and minimizes false alarms. It is a do-it-yourself system, eliminating the need for recurring monitoring fees.

This manual provides detailed instructions for the installation, operation, and maintenance of your SC-1000 alarm system, ensuring optimal performance and reliable protection.

2. WHAT'S IN THE BOX

Upon unpacking your Skylink SC-1000 system, verify that all components listed below are present:

- Alarm with Control Panel (SC-001)
- One Motion Sensor (PS-434A)
- Two Door/Window Sensors (WT-433)
- One Keychain Transmitter (4B-434)
- One Emergency Dialer (AD-433S)
- Two AC Adapters
- Three 9-volt Alkaline Batteries
- Three 12-volt Alkaline Batteries
- Phone Line
- Instruction Manual (this document)
- Warranty Card

3. PRODUCT OVERVIEW AND COMPONENTS

The Skylink SC-1000 system comprises several key components that work together to provide comprehensive security. Below is an illustration of the main components included in your system:



Figure 3.1: Main components of the Skylink SC-1000 Wireless Alarm System. From top left, clockwise: SC-001 Control Panel, WT-433 Door/Window Sensors, AD-433S Emergency Dialer, 4B-434 Keychain Transmitter, PS-434A Motion Sensor.

3.1. SC-001 Control Panel

The central unit of the alarm system, featuring a keypad for arming/disarming, status indicators (AC Power, Low Battery, Arm), and mode selection (Chime, Delay, Instant). It communicates wirelessly with all sensors.

3.2. WT-433 Door/Window Sensors

These two-piece sensors are designed to detect the opening of doors or windows. When the magnetic contact is broken, a signal is sent to the control panel, triggering the alarm if the system is armed.

3.3. PS-434A Motion Sensor

A passive infrared (PIR) sensor that detects movement within its detection zone. Ideal for protecting larger areas, it triggers the alarm upon detecting unauthorized motion when the system is armed.

3.4. 4B-434 Keychain Transmitter

A portable remote control for convenient arming and disarming of the system. It allows users to control the alarm without needing to access the main control panel keypad.

3.5. AD-433S Emergency Dialer

This unit automatically dials pre-programmed phone numbers and plays a recorded emergency message when the alarm is triggered. It acts as your personal monitoring center without any monthly fees.

4. SETUP AND INSTALLATION

The SC-1000 system is designed for easy do-it-yourself installation. Follow these steps carefully to set up your alarm system.

4.1. Initial Power-Up

1. **Control Panel (SC-001):** Insert the 9-volt alkaline battery into the battery compartment. Connect the AC adapter to the control panel and plug it into a standard wall outlet. The "AC.PWR" indicator should illuminate.
2. **Emergency Dialer (AD-433S):** Insert the 9-volt alkaline battery. Connect the AC adapter and plug it into a standard wall outlet. Connect the provided phone line from the dialer to your telephone wall jack.
3. **Sensors (WT-433, PS-434A):** Insert the appropriate batteries (12-volt alkaline) into each sensor as per their individual instructions.

4.2. Sensor Pairing and Placement

Each sensor must be wirelessly linked to the control panel. Refer to the specific instructions for each sensor type for detailed pairing procedures. Once paired, strategically place your sensors:

- **Door/Window Sensors:** Mount one part on the door/window frame and the other on the moving door/window, ensuring they are aligned and within 1/2 inch of each other when closed.
- **Motion Sensor:** Place in a corner or elevated position to cover the desired area, avoiding direct sunlight or heat sources that could cause false alarms.

4.3. Programming the Emergency Dialer (AD-433S)

The emergency dialer can call up to nine different phone numbers and play a personalized 40-second message.

1. **Record Message:** Follow the dialer's instructions to record your emergency message. Ensure it clearly states the situation and requests help.
2. **Program Phone Numbers:** Enter up to nine contact numbers (e.g., cellular phone, pager, doctor, relatives, friends, neighbors) into the dialer's memory. The dialer will call these numbers in sequence until the message is acknowledged.

5. OPERATION

Understanding how to arm, disarm, and manage your alarm system is crucial for effective security.

5.1. Arming and Disarming the System

- **To Arm:** Enter your personal security code on the SC-001 control panel keypad or press the arm button on the keychain transmitter. The "ARM" indicator will illuminate.
- **To Disarm:** Enter your personal security code on the SC-001 control panel keypad or press the disarm button on the keychain transmitter. The "ARM" indicator will turn off.

5.2. System Modes

The SC-001 control panel offers different modes to suit your security needs:

- **Chime Mode:** When enabled, sensors will produce a chime sound when triggered, without activating the full alarm. Useful for knowing when a door or window is opened.
- **Instant Mode:** Any triggered sensor will immediately activate the alarm siren.
- **Delay Mode:** Provides a pre-set entry/exit delay time, allowing users to arm/disarm the system without triggering the alarm immediately upon entering or exiting.

5.3. Emergency Call Process

If any armed sensor is triggered, the following sequence occurs:

1. The 110dB siren will sound loudly.
2. The triggered sensor sends a wireless signal to the Emergency Dialer (AD-433S).
3. The AD-433S automatically dials the pre-programmed phone numbers in sequence.
4. Upon connection, your pre-recorded 40-second emergency message is played to the recipient.

6. MAINTENANCE

Regular maintenance ensures the longevity and reliability of your Skylink SC-1000 system.

6.1. Battery Replacement

- **Control Panel & Dialer:** The system runs on AC power with 9-volt alkaline battery backup. A "LO BATT" indicator on the control panel and dialer will illuminate when the battery needs replacement. Replace the 9V battery promptly to maintain backup power during outages.
- **Sensors:** Door/Window sensors and Motion sensors use 12-volt alkaline batteries. Replace them when their respective low battery indicators activate or when performance degrades.
- **Keychain Transmitter:** Replace the battery when the transmission range decreases or the indicator light fails to illuminate.

6.2. General Care

- Keep all components clean and free from dust. Use a soft, dry cloth for cleaning.
- Avoid exposing components to extreme temperatures, high humidity, or direct water contact.
- Test your system periodically (e.g., monthly) to ensure all sensors are functioning correctly and the dialer can successfully make calls. Inform your programmed contacts before conducting a test.

7. TROUBLESHOOTING

This section addresses common issues you might encounter with your Skylink SC-1000 system.

7.1. System Not Arming/Disarming

- Ensure the correct security code is entered.
- Check the batteries in the keychain transmitter if using it.
- Verify the control panel has power (AC.PWR indicator).

7.2. False Alarms

- **Motion Sensor:** Ensure it is not placed near heat sources (vents, direct sunlight) or in areas with pets that could trigger it. Adjust sensitivity if possible.
- **Door/Window Sensors:** Check that both parts of the sensor are securely mounted and not shifting, causing intermittent contact breaks.
- **Low Battery:** Replace batteries in sensors or the control panel if the "LO BATT" indicator is on.

7.3. Emergency Dialer Not Calling

- Verify the phone line is securely connected to both the dialer and the wall jack.

- Ensure the dialer has power (AC.PWR indicator) and a charged backup battery.
- Confirm that phone numbers are correctly programmed into the dialer.
- Test the dialer by manually triggering the alarm and listening for dial tone/calls.
- *Note:* If the phone line is cut or disconnected, the dialer cannot make calls.

7.4. Loud Beep on Arm/Disarm

The system is designed to emit a loud beep for confirmation. This is a normal operational characteristic. There is no setting to reduce this volume directly on the main unit.

8. SPECIFICATIONS

Feature	Detail
Brand	SKYLINK
Model Number	SC-1000
Color	White
Power Source	Battery Powered (with AC adapter)
Connectivity Technology	Wireless
Installation Type	Self-Adhesive
Alert Type	Motion, Entry/Exit
Item Weight	5.5 Pounds (total package)
Product Dimensions	2.5 x 10 x 9 inches
Batteries Required	1 x 9V (included), 3 x 12V (included)

9. WARRANTY AND SUPPORT

9.1. Warranty Information

The Skylink SC-1000 Complete Wireless Alarm System comes with a **1 Year Warranty** (Repair or Replace) from the date of purchase. Please retain your proof of purchase for warranty claims.


9.2. Customer Support

For technical assistance, troubleshooting, or warranty inquiries, please contact Skylink customer support. Refer to the warranty card included in your package for the most current contact information.

Additional resources, including a downloadable PDF user manual, may be available on the official Skylink website or through the retailer where the product was purchased.

You can also refer to the official user manual PDF [Skylink SC-1000 User Manual \(PDF\)](#)

	<p>SC-1000 Power Bank User Manual</p> <p>User manual for the SC-1000 Power Bank, detailing product specifications, charging instructions, troubleshooting, and safety information.</p>
	<p>INFINITI I35 Starting and Charging System Service Manual</p> <p>A comprehensive service manual for the INFINITI I35, detailing the starting and charging systems. It covers battery handling, starting system diagnostics, charging system troubleshooting, component construction, removal/installation procedures, and service data specifications.</p>
	<p>Nissan/Infiniti Starting and Charging System Service Manual (VK45DE, VQ35DE)</p> <p>Comprehensive service manual detailing the starting and charging systems for Nissan/Infiniti vehicles with VK45DE and VQ35DE engines. Includes diagnostics, troubleshooting, removal, installation, and specifications for battery, starter, and alternator.</p>
	<p>SOUNDCART SC-PSC Production Sound Cart Assembly and Specifications</p> <p>Comprehensive guide to assembling the SOUNDCART SC-PSC Production Sound Cart, including parts list, assembly steps, specifications, maintenance, and optional accessories.</p>
	<p>- Samsung Refrigerator Manual</p>
	<p>Number One Mechanical & Electrical SC911x Series User Guide: Interconnecting CO and Smoke Alarms</p> <p>User guide for Number One Mechanical & Electrical SC911x series interconnecting carbon monoxide and smoke alarms (SC-9111, SC-9111R, SC-9113, SC-9113R). Learn about installation, operation, safety, maintenance, and troubleshooting for effective home fire and CO detection.</p>

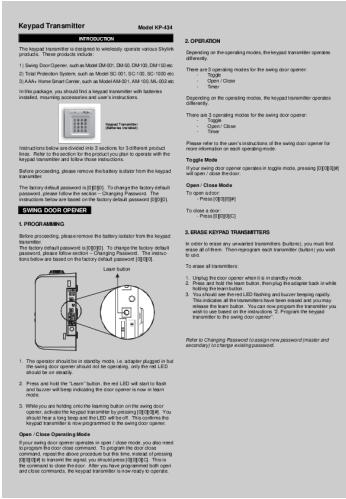


[pdf] User Manual Instructions Accessories

D DM100 mKP434E1 p65 Ida Keypad Transmitter Home Controls Low battery condition is indicated by the LO BATT light on when keypad activated To replace batteries 1 Remove transmitter from the SKKP434 Manual homecontrols homecontrols products s SK Skylink SKKP434 Manual srstid AfmBOOrZYyjL7Oc3cgr1k8BjvrLBzpS5jfSgu5SXbraLrgxyEcup oJX SkyLink KP 434 Automatic Door Transmitter Keypad Controls SkyLink Product Manuals Programming Instructions Action Direct Low the skylink KP434 manual shop action direct content manuals skylink manual homecontrols Controls Keypad the Follow instructions below to program AAA TM Control Panel There are 5 locations you can you skylink oJX homecontrols AfmBOoqsEAE0T8tgNf f01y3yW9S44qZk006mxyvjjAW9YtOIXDJLG ||| Keypad Transmitter Model KP-434 INTRODUCTION The keypad transmitter is designed to wirelessly operate various Skylink products include: 1 Swing Door Opener, such as Model DM-001, DM-50, DM-100, DM-150 etc 2 Total Protection System, such as Model SC-001, SC-100, SC-1000 etc 3 AA... lang:en score:36 filesize: 65.18 K page_count: 4 document date: 2006-08-15



[pdf] User Manual Guide Accessories

AA433Eng Ida Audio Alarm Skylink Home 3 The AA 433 is designed to be used in conjunction with Security System SC 10 100 series 1000 and any MODEL P N 101Z693 001 FEB 2012 CUSTOMER SERVICE 17 Sheard Avenue Brampton Ontario Canada L6Y 1J3 Tel 800 304 1187 Fax 286 1320 Email Refer the back of this user s manual for more accessories One pack screws anchors template Double Sided Tape Warning Stickers Manual mA 20120216 skylinkhome docs manuals security skylinkstore 80 www.skylinkhome.com Audio Alarm MODEL : AA-433 P/N. 101Z693-001 FEB,2012 CUSTOMER SERVICE 17 Shea ... AA-433 is designed to be used in conjunction with Skylink Security System SC-10, SC-100 series, SC-1000 series and any Skylink sensors/transmitters. When any of the Skylink Security Systems or se... lang:en score:25 filesize: 281.14 K page_count: 8 document date: 2012-02-15

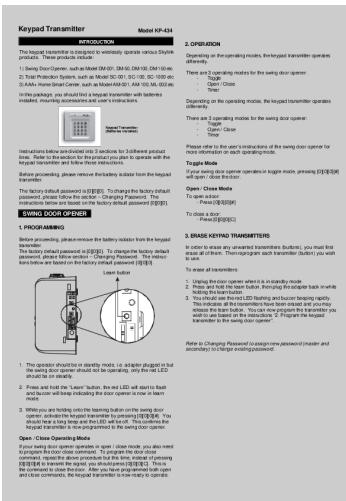

[pdf] User Manual Instructions Accessories

D DM100 mKP434E1 p65 Ida Keypad Transmitter Model KP 434 2 OPERATION INTRODUCTION 1 PROGRAMMING The keypad transmitter is designed to wirelessly operate various Skylink products These include Swing Door Opener such as KP434 manual 20061006 skylinkstore users Alarm EN skylinkhome docs manuals security Keypad Transmitter Model KP-434 INTRODUCTION The keypad transmitter is designed to wirelessly operate various Skylink products. These products include: 1 Swing Door Opener, such as Model DM-001, DM-50, DM-100, DM-150 etc 2 Total Protection System, such as Model SC-001, SC-100, SC-1000 etc 3 AA... lang:en score:24 filesize: 65.17 K page_count: 4 document date: 2006-08-15

REGISTRATION FORM

This is a registration form for you to fill in to obtain one year free warranty or an extended warranty. To have valid warranty the terms and conditions be sc us skylinkstore docs manuals security 80 skylinkhome

Address:
 City _____ State/Province _____
 Country _____ Zip code/Postal Code _____
 Contact number (day) _____
 E-mail _____

Product details:
 Date of purchase _____ Purchased from _____
 Name of product _____ Model number _____
 Serial number _____
 Serial number can be found on the back of the Window Security System. It starts with 2 letters with 5-digits.

Extended warranty: optional and note that the can be selected
 Check the corresponding boxes and note down the amount per model:

Model	Additional 1 year	Additional 2 years	Additional 4 years
SC-100	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SC-1000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SC-2000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SC-3000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SC-4000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Check the payment method:
 Credit Card Payment
 Master Card Visa Card American Express
 Credit card number _____ Expiry date _____
 Cheque must be sent along with this registration form to one of the addresses below:
Cheque Payment:
 Name of bank _____ Cheque number _____
 Signature _____ Date _____

Note:
 We encourage using credit card payment, the name on the form should be the same as the name on the credit card.
 The first year warranty is free of charge.
 This can be selected for the first year free warranty for the warranty to be valid.
 A copy of a proof of purchase date must be included.
 Please return this form within 180 days of purchase of the product.

These and other questions from back in the manual, with a copy of a proof of purchase:
 If you are located in North or South America:
 Please return this form to:
 17Bancroft Avenue, Brampton, Ontario,
 Canada L6Y 1Z5
 Tel: (905) 454-8483 Fax: (905) 454-7419
 Email: skylink@skylinkhome.com

[\[pdf\]](#) **Warranty**

FORMprice Ida REGISTRATION FORM Skylink This is a registration form for you to fill in obtain one year free warranty or an extended To have valid the terms and conditions be sc us skylinkstore docs manuals security 80 skylinkhome

REGISTRATION FORM This is a registration form for you to fill in to obtain one-year free warranty o ... checked Check the corresponding box es and note down the amount per model s Model SC-10 SC-100 **SC-1000** Additional 1 year USD 12.87 USD 18.81 USD 31.57 Additional 2 years USD 21.06 USD 30.78 USD...

lang:en **score:24** filesize: 36.41 K page_count: 1 document date: 2007-04-23

REGISTRATION FORM

This is a registration form for you to fill in to obtain one year free warranty or an extended warranty. To have valid warranty the terms and conditions be sc us skylinkstore docs manuals security 80 skylinkhome

Address:
 City _____ State/Province _____
 Country _____ Zip code/Postal Code _____
 Contact number (day) _____
 E-mail _____

Product details:
 Date of purchase _____ Purchased from _____
 Name of product _____ Model number _____
 Serial number _____
 Serial number can be found on the back of the Window Security System. It starts with 2 letters with 5-digits.

Extended warranty: optional and note that the can be selected
 Check the corresponding boxes and note down the amount per model:

Model	Additional 1 year	Additional 2 years	Additional 4 years
SC-100	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SC-1000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SC-2000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SC-3000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SC-4000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Check the payment method:
 Credit Card Payment
 Master Card Visa Card American Express
 Credit card number _____ Expiry date _____
 Cheque must be sent along with this registration form to one of the addresses below:
Cheque Payment:
 Name of bank _____ Cheque number _____
 Signature _____ Date _____

Note:
 We encourage using credit card payment, the name on the form should be the same as the name on the credit card.
 The first year warranty is free of charge.
 This can be selected for the first year free warranty for the warranty to be valid.
 A copy of a proof of purchase date must be included.
 Please return this form within 180 days of purchase of the product.

These and other questions from back in the manual, with a copy of a proof of purchase:
 If you are located in North or South America:
 Please return this form to:
 17Bancroft Avenue, Brampton, Ontario,
 Canada L6Y 1Z5
 Tel: (905) 454-8483 Fax: (905) 454-7419
 Email: skylink@skylinkhome.com

[\[pdf\]](#) **Warranty**

FORMprice Ida REGISTRATION FORM sc warranty form ca skylinkhome docs manuals security

REGISTRATION FORM This is a registration form for you to fill in to obtain one-year free warranty o ... checked Check the corresponding box es and note down the amount per model s Model SC-10 SC-100 **SC-1000** SC-2000 Additional 1 year CAD 18.04 CAD 26.40 CAD 44.22 CAD 44.22 Additional 2 years CAD 2...

lang:en **score:21** filesize: 36.35 K page_count: 1 document date: 2007-04-23

ANNOUNCEMENT

Re: Temperature Sensor

Skylink's Temperature Sensor models TS-434/TS-433 and TS-101 were not clearly defined in the manual causing some compatibility issues. The following information states which series are compatible with the different Skylink systems:

The model TS-434/TS-433 is designed to work only with the Skylink security consoles SC-001, SC-100, SC-1000, AA-433, SC-10, AM-001, and the Skylink dialer model AD-433S & MS-2001.

The model TS-101 is designed to work only with the Skylink security consoles AM-001, AM-100, AA-433, SC-10, and MS-100.

We will launch a new TS-101A soon that is compatible with models SC-001, SC-100, SC-1000, AA-433, SC-10, AM-001, AM-100, AA-433, SC-10 and the Skylink dialer model AD-433S & MS-2001 to solve the compatibility issue. We will announce product details for the TS-101A soon.

We apologize for any inconvenience this may have caused. Please contact our Sales at Toll Free 1-800-304-1187 or e-mail sales@skylinkhome.com if you have any questions.

Skylink Group
 Nov 13, 2007

[\[pdf\]](#) **Declaration of Conformity**

Microsoft Word ANNOUNCEMENT TS101A 111307 doc Joe Ng announcement ts101a 20071113

skylinkhome docs media 80

ANNOUNCEMENT Re: Temperature Sensor Skylink s Temperature Sensor models TS-434/TS-433 and TS-101 wer ... The model TS-434/TS-433 is designed to work only with the Skylink security consoles SC-001, SC-100, **SC-1000**, AA-433, SC-10 and the Skylink dialer model AD-433S MS-2001. The model TS-101 is designed ...

lang:en **score:14** filesize: 10.03 K page_count: 1 document date: 2007-11-14

FAQ for SC-1000	
Q1:	What is SC-1000?
A1:	SC-1000 is the first complete, totally wireless alarm system that is easy to install, program and use.
Q2:	How much is the monthly monitoring fee?
A2:	None. The best part about owning the SC-1000 is that it is a self-monitoring center on its own. In the event of an emergency all monitoring companies do make the call to the emergency services for you. The SC-1000 comes with an emergency phone number which in the event of an emergency it will call up to a different number and leave a message. (example: leave a recorded message to the person of your choice, thus, eliminating the need for a monitoring company and the costly monitoring fees).
Q3:	How hard is it to install, program and use the SC-1000?
A3:	At Skylink we make sure that all our products are the most user friendly. Our engineers have a lot of time and effort in making our products easy to install, program and use very easy. The result is the SC-1000 that is a totally Do-It-Yourself, wireless system that does not need any hard-wiring. It is a keypad. It can prevent armed and unarmed. You can even have it just hook it up and forget it. You can also personalizes the functions if there is a need by going thru the clear and simple instructions in the user manual.
Q4:	How many sensors do I add more sensors to the SC-1000?
A4:	This system is totally wireless. You can add as many sensors as you need, up to 30 different sensors. Just attach sensor to the control panel by pressing one button and it is ready to use.
Q5:	Why do I need a security system for my house?
A5:	Statistics from the Police Department show that a world apart. That is, homes with a security system are less likely to be broken into than homes without a security system. Skylink security systems are designed to work for you at a cost that can be easily be included in your budget. There is no monitoring fee involved so you do not have to keep paying for a monitoring service for a long time.
Q6:	What do I do for help with installation, programming, trouble shooting, etc.?
A6:	Please call Toll Free 1-800-304-1107 in USA and Canada and 905-456-5883 from anywhere in the world and our customer service associates will be more than happy to answer to any of your questions regarding installation, programming, etc., or send us your questions and comments at info@skylinkhome.com

[pdf] Frequently Asked Questions Declaration of Conformity

Microsoft Word FAQ for SC doc Joe 41y4rhnaEwS m media amazon images I |||

FAQ for SC-1000 Q1: What is **SC-1000** A1: **SC-1000** is the first complete, totally wireless alarm system that is easy to install, program and use. Q2: How much is the monthly monitoring fee A2: None. The best part about owning the **SC-1000** is that it is a self-monitoring center on its own. In the event...

lang:en score:14 filesize: 30.51 K page_count: 1 document date: 2010-04-25

<p>Skylink wireless alarm system SC-1001 now available at Fry's Electronics Brampton, ONTARIO, Canada May 22, 2010 - The Wireless Alarm System SC-1001+ designed and manufactured by the Skylink Group - a leader in wireless technology is now available at Fry's Electronics - a big-box store and retailer of software, consumer electronics, computer hardware and household appliances with a chain of superstores at USA.</p> <p>"The selling of Skylink Wireless Alarm System is a step in the popularity to be successful products. We are very excited to have the SC-1001+ available in Fry's. The Control Panel can control up to 30 different sensors, these sensors include door/window sensors, motion sensors, glass break sensors, and smoke detectors. If any of these sensors are triggered when the system is armed the siren will sound and it will send a wireless signal to the control panel. The control panel can then call up to 9 different emergency dialer or call up to 9 different phone numbers including your own cellular phone, pager, your doctor, relatives, friends, neighbors, etc. Once the recipient picks up the phone, the system will then ask if they are at home or not and when the recipient says they are in an emergency situation and to send help right away."</p> <p>The system SC-1001 Clam shell pack, SC-1000 is gift box pack accessories: Audio Alarm AA-433 , Remote Keychain Transmitter 4B-434 , M...</p> <p>About Fry's Electronics Fry's Electronics is a big box store and retailer of software, consumer electronics, computer hardware and household appliances with a chain of superstores headquartered at Silicon Valley. It has more than 30 stores in different states and online store at http://www.frys.com</p> <p>About Skylink Skylink understands the needs and concerns of the homeowner in providing a safe and comfortable environment for the family. Established in 1994, Skylink is headquartered in Brampton, Ontario, Canada. City, California U.S.A. and Hong Kong. R&D, electronic design, software design, mechanical design and graphic design departments are in long product line are based in the Hong Kong office. Skylink also uses a manufacturing facility in China. More information at http://www.skylinkhome.com</p>
--

[pdf] Declaration of Conformity Press Release

Microsoft Word Press Release 5 22 10 doc Owner skylinkhome 80 docs media skylinknet ca

Skylink wireless alarm system SC-1001 now available at Fry's Electronics Brampton, ONTARIO, Canada ... you are in an emergency situation and to send help right away.
The system SC-1001 Clam shell pack, **SC-1000** is gift box pack accessories: Audio Alarm AA-433 , Remote Keychain Transmitter 4B-434 , M...


lang:en score:13 filesize: 18.21 K page_count: 1 document date: 2010-05-22

ALARM SYSTEM COMPARISON	
Brand	ALARM SYSTEM
Model	Complexity
Wired Zones	Maximum Wireless Zo ... inc
Easy	2 2 30 30
Away	Home
No	No
Yes	No
X10	Standard
No	Yes
Recorded Message	No
No	No
Tone	No
SC-1000	Easy
0 0 30	
30	Away
Away	Home
Night	
SKYLINK AM-100	Easy
0 0 10 10	Away
Away	Chime
ML-100	Easy
0 0 10...	

Alarm Comparison HOMETROLLER PRO Homeseer HomeTroller Pro Smart Home Hub Aartech Canada alarm comparison aartech ca images files |||

ALARM SYSTEM COMPARISON Brand Model Complexity Wired Zones Standard Wired Zones Maximum Wireless Zo ... inc Easy 2 2 30 30 Away Home No No Yes No Yes X10 Standard No Yes Recorded Message No No No Tone **SC-1000** Easy 0 0 30 30 Away Home Night SKYLINK AM-100 Easy 0 0 10 10 Away Chime ML-100 Easy 0 0 10...

lang:en score:13 filesize: 8.57 K page_count: 1 document date: 2011-03-18

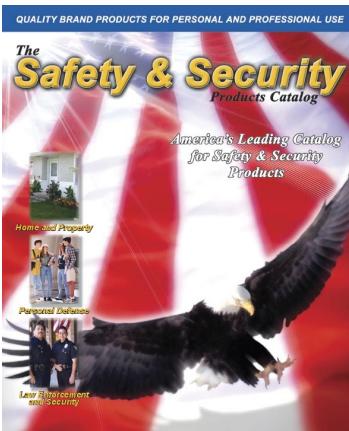

[\[pdf\]](#) Catalog

2006 Catalog 48pgs indd Yahoo! 4 Pepper Spray! 1 Self Defense Product Worldwide Add a key release to your chain pepper spray Specify red burgundy black or blue KEYREL \$1 25 pager will surprise any safetyandsecuritycentercatalog lib store yahoo net safetyandsecuritycenter |||

Home and Property Personal Defense Law Enforcement and Security The Safety and Security Products C ... were waiting for, complete with auto dialing and 2 key pads, IS HERE. Security Plus presents - The **SC-1000** Introducing the **SC-1000**: This kit is a complete wireless security system that can be instal...

lang:en **score:9** filesize: 6.9 M page_count: 48 document date: 2006-11-22