



AGPTEK Puller User Manual

[Home](#) » [AGPTEK](#) » AGPTEK Puller User Manual 

AGPTEK Puller User Manual



Thank you for purchasing the AGPTEK product. Please read this [User Manual] carefully before using the product, and retain it in for future use. If you have any questions or suggestions about our products, please contact: support@agptek.com. Note: This [User Manual] can help you understand how to use and troubleshoot the problem safely

Contents

[1 Puller Installation](#)

[Instruction:](#)


[2 How to Operate Glue Gun](#)

[3 How to Repair Car Dent](#)

[4 Documents / Resources](#)


[5 Related Posts](#)

Puller Installation Instruction:

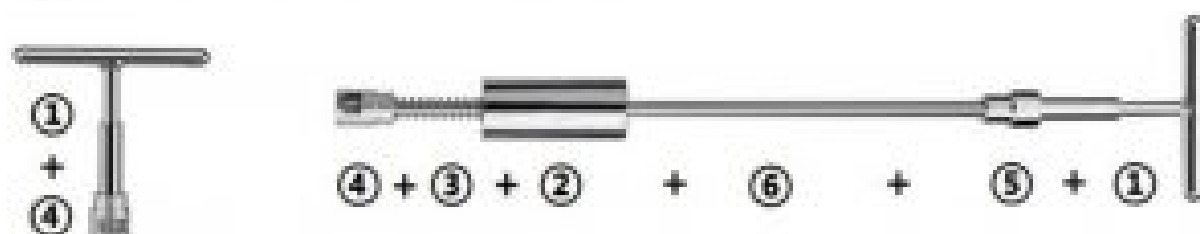





How to Operate Glue Gun

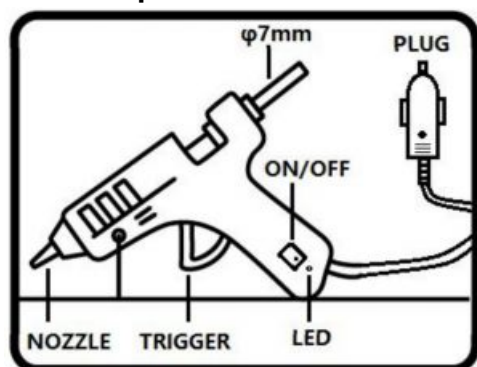

1. Compatible with glue sticks with $\phi 6.8\text{mm}$ - 7.5mm .
2. Working condition: DC 12V, $\geq 4\text{A}$. Please use Car Cigarette Lighter or 12V DC Power Converter to power.
Note: Please turn on the car power supply first before Car Cigarette Lighter is working.
3. Warm-up time: 3-5min.
4. Do not touch nozzle and the glue liquid while the gun is working.
5. Children under 6 years old are prohibited from using this device. Children above 6 years old are allowed to use it under adult supervision.
6. Not waterproof, don't place it being damped by rain or soak it in water.
7. Store it after cooling completely

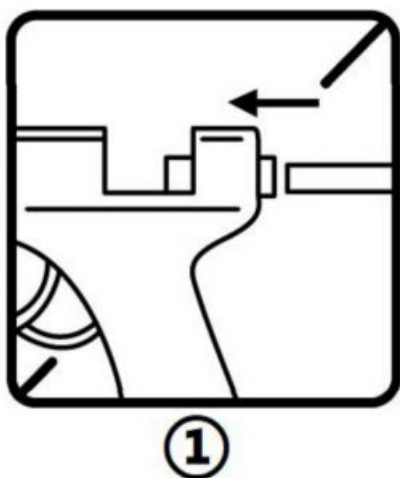

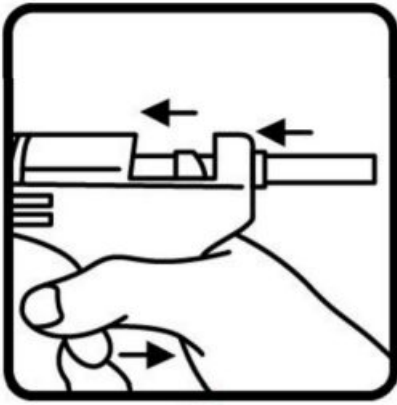

②



③



④

How to Repair Car Dent

Please read this instruction carefully. we recommend that you use other items to practice before repairing, so as not to cause unnecessary damage to your car due to incorrect operations.

Note: For car with thick sheet metal or aged paint, please carefully repair the dent, because it may damage the original paint when repairing

1. Important Notice: Please use the supplied towel to clean the dent, because the dirty surface may reduce the stickiness of glue.



2. Turn on the car's power supply. Plug in the hot melt gun and turn on the switch. Wait for 3-5 minutes for heating and melting the glue stick, and then apply the hot-melt glue to a suitable tab.



3. Quickly place the tab to the dent and add some hot glue around it to reinforce. Wait 10 minutes for drying glue.




4. Pull the tab outward with a puller. If necessary, you can repeatedly keep the hammer hit the T handle to restore the dent




5. Spray 75-99 degree alcohol to the residue glue for reducing



6. Remove the glue from your car with plastic film and clean its surface with the towel.

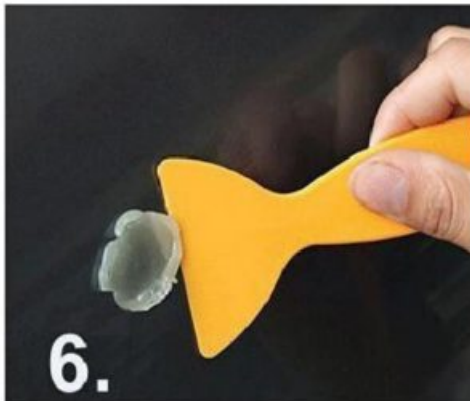

Documents / Resources

	AGPTEK Puller [pdf] User Manual Puller
---	---