




AIPHONE AC Series Access Control Product Line User Guide

[Home](#) » [AIPHONE](#) » AIPHONE AC Series Access Control Product Line User Guide 



AC SERIES AC Nio™ Admin Setup Guide

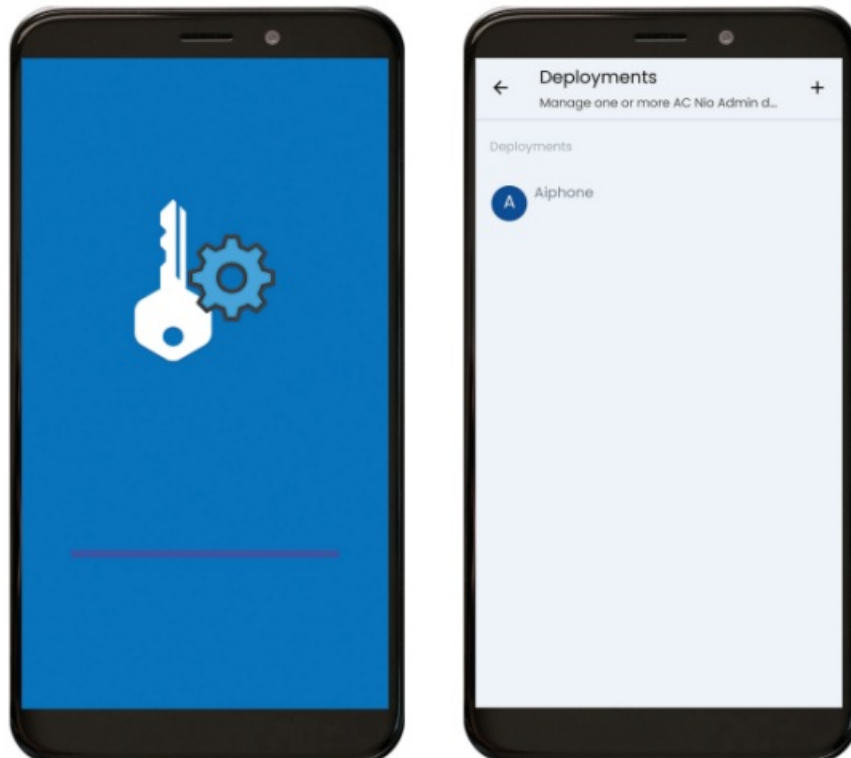

Contents


- [1 Introduction](#)
- [2 Configuring AC Nio™ Admin](#)
- [3 Documents / Resources](#)
 - [3.1 References](#)


Introduction


This is a guide to setting up AC Nio™ Admin. AC Nio™ Admin is a mobile app available for Apple® iOS and Google Android™ devices that acts as an extension of AC Nio™ programming software. AC Nio™ Admin allows administrators to make configuration changes to AC Nio™, such as adding or removing users from the system. This guide assumes that AC Nio™ is fully configured and operational on a PC or other host device. If that is not the case, refer to the AC Series – Quick Start Guide available at www.aiphone.com/ac before continuing.

Configuring AC Nio™ Admin

Open AC Nio™ Admin on the mobile device. Once the app has finished loading, Tap **Deployments** .

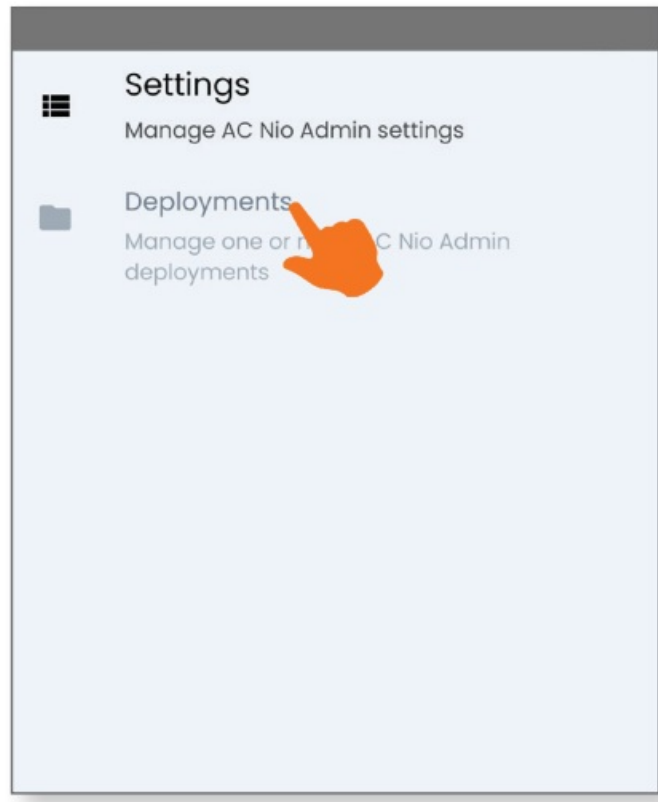

On the next screen, tap  .

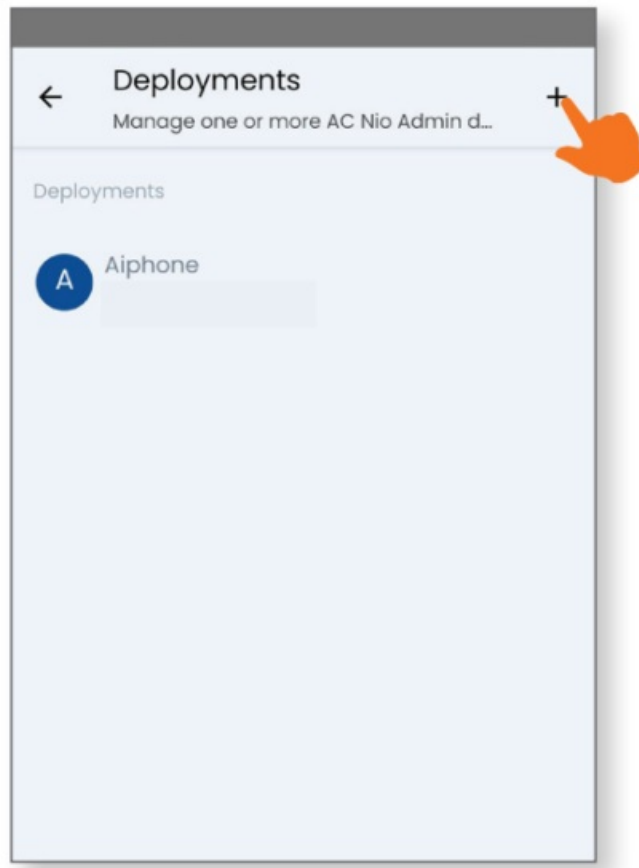


Configuring AC Nio™ Admin (continued)

The Add Deployment screen allows the mobile device's AC Nio™ Admin app to be added to an existing deployment. The AC Nio™ credentials can be entered manually, or a QR code generated by AC Nio™ can be scanned.

Adding a Deployment Manually

Tap **Add Manually**.

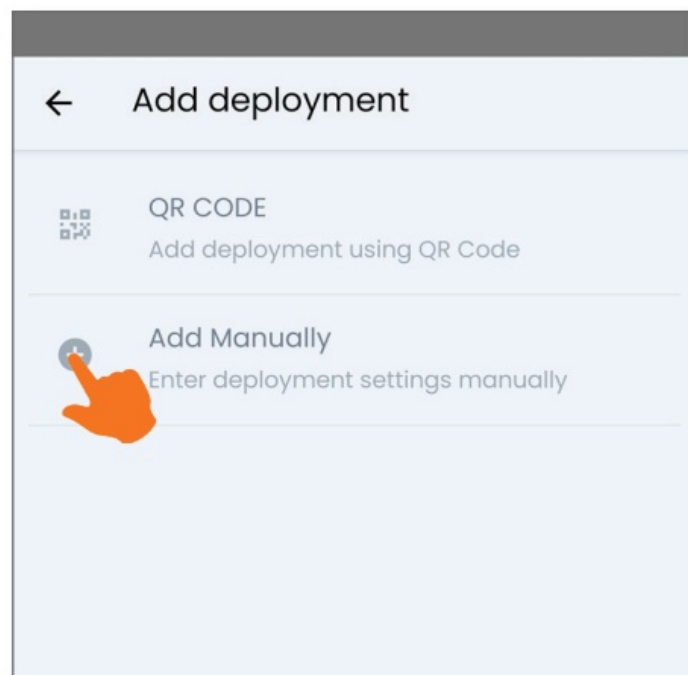

Fill in the Deployment name, a Description, and the Server address. This will either be the IP Address of the host device running AC Nio™, or a name provided by a DNS service, ending in :11001 for the port. For example, <https://sampleserver.com:11001>. Fill in credentials for the administrator account to be added. Tap **SAVE AND TEST** to complete the process.

← Edit deployment

Deployment name
Aiphone

Describe this deployment
Aiphone

Server address
https://samplecompanyserver.com:11001

Username
administrator@samplecompany.com

Password
.....

Allow Self Signed Certificates ☐


SAVE AND TEST


 Consult with the network administrator to see if “Allow Self Signed Certificates” needs to be selected.

Adding a Deployment by QR Code


Tap **QR CODE** . The mobile device’s camera will open to scan the code.

← Add deployment


 QR CODE
Add deployment using QR Code

 Add Manually
Enter deployment settings manually

Log into AC Nio™ on the host device using the administrator account that will be registered to the app. Navigate to **Administration**, Administrators.

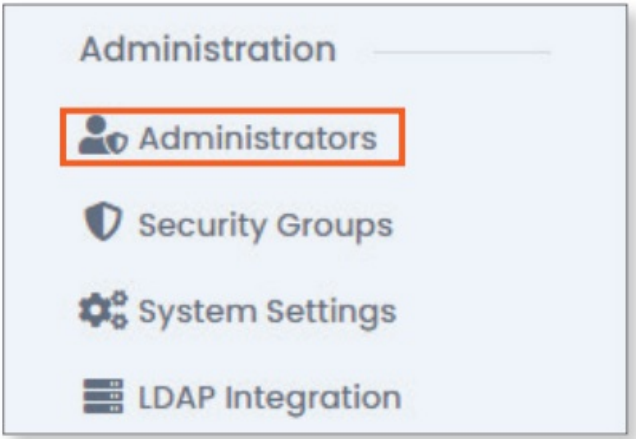


The QR Code will be displayed to the right of the page. Scan it with the mobile device's camera to complete the process.

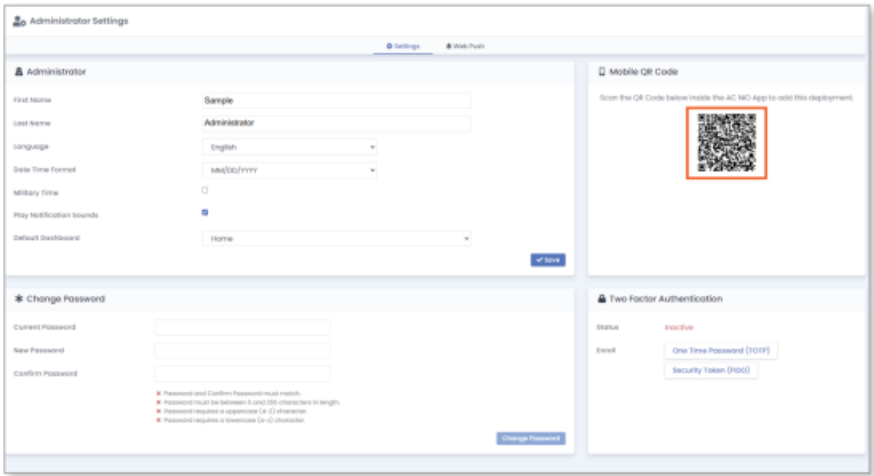

Aiphone Corporation | www.aiphone.com | 800-692-0200
For more details about the features and information above, please contact Technical Support.
01/25

Documents / Resources



AIPHONE AC Series Access Control Product Line [pdf] User Guide
AC Series Access Control Product Line, AC Series, Access Control Product Line, Control Product Line, Product Line

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.