

AIPHONE GT-4ZP 4-Way Video and Power Distribution Adaptor Instructions

[Home](#) » [AIPHONE](#) » AIPHONE GT-4ZP 4-Way Video and Power Distribution Adaptor Instructions 



Contents

- [1 GT-4ZP](#)
- [2 -INSTRUCTIONS-](#)
- [3 WIRING](#)
- [4 SPECIFICATIONS](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)


GT-4ZP

4-Way Video & Power Distribution Adaptor (1 PS-2420UL required per GT-4ZP)

-INSTRUCTIONS-

The GT-4ZP allows one PS-2420UL to power up four GT-1C7W app-enabled tenant stations. The GT-4ZP replaces existing GT-4Z adaptors in a standard GT system and requires 1 PS-2420UL per GT-4ZP. Each GT-4ZP includes 4 power jumpers (GTW-24J) that are to be installed on the GT-1C7W between the B1/B2 and +/- terminals, which provide power to the GT-1C7W without having to install a local PS-2420UL for each tenant station.

WIRING

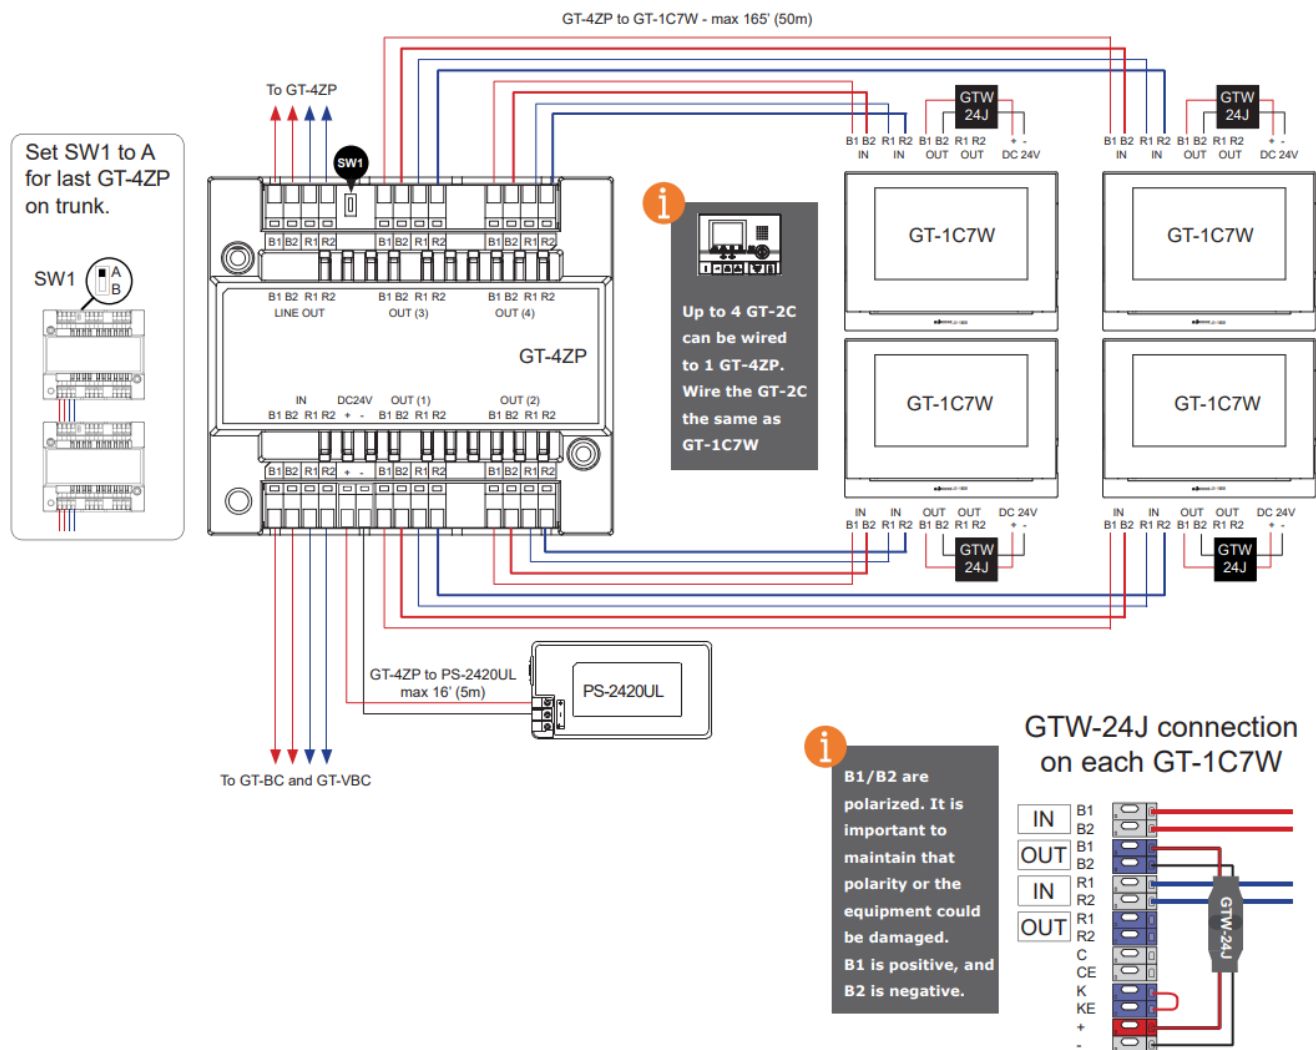

SPECIFICATIONS

- Power: 24V DC (One PS-2420UL per GT-4ZP)
- Mounting: W-DIN11 (not included)
- Contents: 1x GT-4ZP, 4x GTW-24J
- Dimensions: 4-1/4" H x 4-13/16" W x 2-3/8" D
- Temperature: 32-104° F (0-40° C)

These instructions only include information on the installation of the GT-4ZP. Please see the GT Installation Manual for complete system information.

Aiphone Corporation
www.aiphone.com
 (800) 692-0200
 GT-4ZP Instr 0621

Documents / Resources

