



AJAX 000165 Black Wireless Panic Button User Manual

[Home](#) » [ajax](#) » **AJAX 000165 Black Wireless Panic Button User Manual** 



**000165 Black Wireless Panic Button
User Manual**



Button is a wireless panic button with protection against accidental press and additional mode to control .

[automation devices](#)



Button is compatible with [Ajax hubs](#) only. No support for [ocBridge Plus](#) and [uartBridge](#) integration modules!

Button is connected to the security system and configured via [Ajax apps](#) on iOS, Android, macOS, and Windows. The users are alerted of all alarms and events via push notifications, SMS, and phone calls (if enabled).

[Buy panic button Button](#)

Contents


- [1 Functional elements](#)
- [2 Operating principle](#)
- [3 Connecting the button to the Ajax system](#)
- [4 In order to connect a Button](#)
- [5 Settings](#)
- [6 Operating indication](#)
- [7 Use cases](#)
- [8 Mute Interconnected Fire Detectors Alarm](#)
- [9 How to carry around Button](#)
- [10 Maintenance](#)
- [11 Technical Specifications](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)

Functional elements



- 1. Alarm button
- 2. Indicator lights
- 3. Button mounting hole

Operating principle

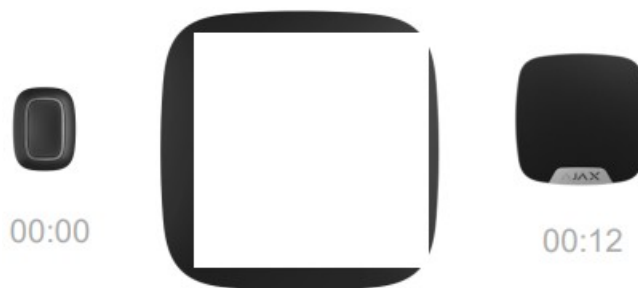

Button is a wireless panic button that, when pressed, transmits an alarm to users, as well as to the security company's CMS. In Control mode, Button allows you to control Ajax automation devices with a short or long press of a button.

In panic mode, the Button can operate as a panic button and signal about a threat, or notify of the need for auxiliary help, or inform about the intrusion, regas alarm, or leakage. You can select the type of alarm in the button settings. The text of alarm notifications depends on the selected type, as well as the event codes transmitted to the central monitoring station of the security company (CMS).

i In the Button settings — Scenarios menu, you can assign the action of an automation device ([Relay](#) [WallSwitch](#) or [Socket](#)) to a button press.

The Button is equipped with protection against accidental press and transmits alarms at a distance of up to 1,300 m from the hub. Please be aware that the presence of any obstructions that impede the signal (for example, walls or doors) will reduce this distance.

Button is easy to carry around. You can always keep it on a wrist or a necklace.

The device is resistant to dust and splashes.

i When connecting Button via [radio signal range extender](#), please note that Button does not automatically switch between the radio networks of the radio signal extender and the hub. You can manually assign Button to another hub or range extender in the app.

Connecting the button to the Ajax system

Prior to initiating connection

1. Follow the hub instructions to install the [Ajax application](#) . Create an account, add a hub to the app, and create at least one room.
2. Enter the Ajax app.
3. Activate the hub and check your internet connection.
4. Ensure that the hub is not in armed mode and is not being updated by checking its status in the app.

! Only users with administrative rights can add a device to the hub.

In order to connect a Button

1. Click on Add Device in the Ajax app.
2. Name the device, scan its QR code (located on the package) or enter it manually, select a room and a group (if group mode is enabled).
3. Click Add and the countdown will begin.
4. Hold the button for 7 seconds. When the Button is added, the LEDs will flash green once.

For detection and pairing, the Button must be located within the hub radio communication zone (on the single protected object).

The connected button will appear in the list of hub devices in the application.

Updating the statuses of the device in the list does not depend on the polling time value in the hub settings. Data is

updated only by pressing the Button.

The Button only works with one hub. When connected to a new hub, the button Button stops transmitting commands to the old hub. Note that after being added to the new hub, the Button is not automatically removed from the device list of the old hub. This must be done manually through the Ajax application.

States

Button states can be found in the Ajax app:

1. Ajax app → Devices  → Button

Parameter	Value
Battery Charge	Battery level of the device. Two states available: <ul style="list-style-type: none">● OK.● Battery discharged. How battery charge is displayed in Ajax apps
Operating mode	Displays the operating mode of the button. Three modes are available: <ul style="list-style-type: none">● Panic.● Control.● Mute Fire Alarm.
LED Brightness	Displays current brightness level of indicator light: <ul style="list-style-type: none">● Disabled (LED indication is disabled).● Low.● Max.
Accidental press protection (displayed only for Panic and Mute Fire Alarm operating modes)	Displays the selected type of protection against accidental activation: <ul style="list-style-type: none">● Off — protection disabled.● Long press — in order to send alarm you should hold the button down for more than 1.5 seconds.● Double-pressing — in order to send alarm you should double-press on the button with a pause of no more than 0.5 seconds.
ReX	Displays the status of using a radio signal range extender
Permanent Deactivation	Displays the device's status: active or completely disabled by the user.
Firmware	Button firmware version.
Device ID	Device identifier. Also available on the device's board and its package.
Device No.	Number of the device loop (zone).

Settings

You can adjust the device parameters in the settings section:

1. Ajax app → Devices  → Button → Settings 

Parameter	Value
Name	Name of the device, can be changed.
Room	The choice of the virtual room that the device is assigned to.
Operating mode	<p>Displays the operating mode of the button.</p> <p>Three modes are available:</p> <p>Panic — sends an alarm when pressed.</p> <p>Control — controls automation devices by short or long (3 sec) pressing.</p> <p>Mute Fire Alarm — when pressed, mutes the alarm of Ajax re detectors. The option is available if Interconnected Fire Alarm feature is enabled.</p> <p>Learn more</p>
Type of Event (displayed only for Panic operating mode)	<p>Selection of the Button alarm type:</p> <ul style="list-style-type: none"> ● Intrusion. ● Fire. ● Auxiliary alarm. ● Panic button. ● Gas alarm. ● Malfunction. ● Leakage. ● Custom. <p>The text of SMS and notifications in the app depends on the selected type of alarm.</p>
LED Brightness	<p>This displays the current brightness of the indicator lights:</p> <ul style="list-style-type: none"> ● Disabled (LED indication is disabled). ● Low. ● Max.
Accidental Press Protection (displayed only for Panic and Mute Fire Alarm operating modes)	<p>Displays the selected type of protection against accidental activation:</p> <p>Off — protection disabled.</p> <p>Long press — in order to send an alarm, you need to press and hold the button for more than 1.5 seconds.</p> <p>Double press — in order to send an alarm, you need to double-press the button with a pause of no more than 0.5 seconds between the presses.</p>
Alert with a siren if button is pressed	<p>If the toggle is enabled, pressing a panic button activates Ajax sirens connected to the system. Ajax Button activates all sirens, regardless of the groups they are in.</p>
Scenarios	Opens the menu for creating and configuring scenarios.
User Guide	Opens Button User manual.
Permanent Deactivation	<p>Allows a user to deactivate the device without deleting it from the system. Once deactivated, the device will no longer execute system commands and participate in automation scenarios. Additionally, the panic button of a deactivated device will be disabled.</p> <p>Learn more</p>
Unpair Device	Disconnects Button from the hub and deletes its settings.

Operating indication



00:00

00:03

Button status is indicated with red or green LED indicators.

Category	Indication	Event
Linking to security system	Green LEDs flash 6 times.	The button is not registered in any security system.
	Lights up green for a few seconds.	Adding a button to the security system.
Command delivery indication	Lights up green briefly.	Command is delivered to security system.
	Lights up red briefly.	Command is not delivered to security system.
Long press indication in Control mode	Flashes green briefly.	Button recognized the pressing as a long press and sent the corresponding command to the hub.
Feedback Indication (follows the Command Delivery Indication)	Lights up green for about half a second after the command delivery indication.	The security system has received and performed the command.
	Briefly lights up red after the command delivery indication.	The security system did not perform the command.
Battery status (follows Feedback Indication)	After the main indication it lights up red and goes out smoothly.	Button battery needs to be replaced. At the same time, button commands are delivered to the security system. Battery Replacement

Use cases

Panic Mode

In the panic button mode, Button can call security or help, as well as alert of an emergency by activating sirens and sending other users a notification in the app.

In the Button settings, you can select one type of alarm out of eight:

- Intrusion
- Fire
- Auxiliary alarm
- Panic button
- Gas alarm
- Malfunction
- Leakage
- Custom (not sent to the security company monitoring station)

The type of alarm determines the event code sent to the security company monitoring station (CMS) and the notification text received by the user. This ensures the accurate response to the threat.

Note that in Panic Mode, pressing the Button will raise an alarm regardless of the system security mode.




If Button is pressed, an alarm can also [run a scenario](#) in the Ajax system.


Button can be installed on a surface or carried around. To install on a surface (for example, under the table), secure the Button with double-sided adhesive tape. To carry the Button on the strap: attach the strap to the Button using the mounting hole in the main body of the Button.

Control Mode


Button can be used to control the automation devices. In Control mode, the Button has two pressing options: short and long (the button is pressed for more than 3 seconds). These pressings can trigger the execution of an action by one or more automation devices: Relay, WallSwitch, or Socket.

To bind an automation device action to a long or short press of a Button:


1. Open the [Ajax app](#) and go to the Devices  tab.
2. Select Button in the list of devices and go to settings by clicking the gear icon .

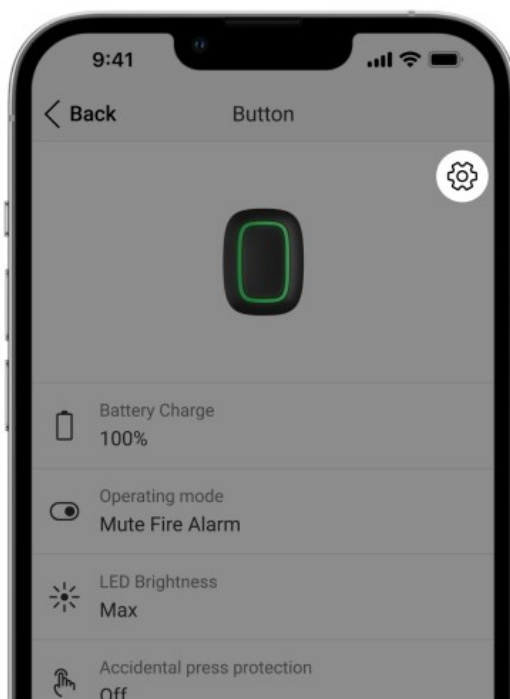


3. Select the Control mode in the Operation mode section. Click on the actual Button device to save the changes
4. Go to the Scenarios menu. Click Create Scenario if you are creating a scenario for the first time, or Add Scenario if scenarios have already been created in the security system.

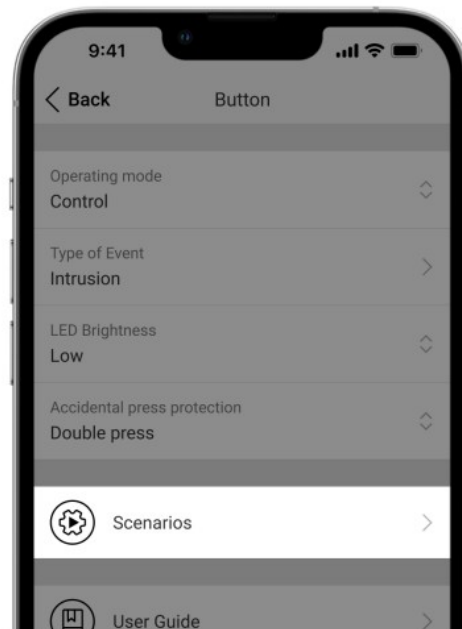

5. Select a pressing option to run the scenario: Short press or Long press.

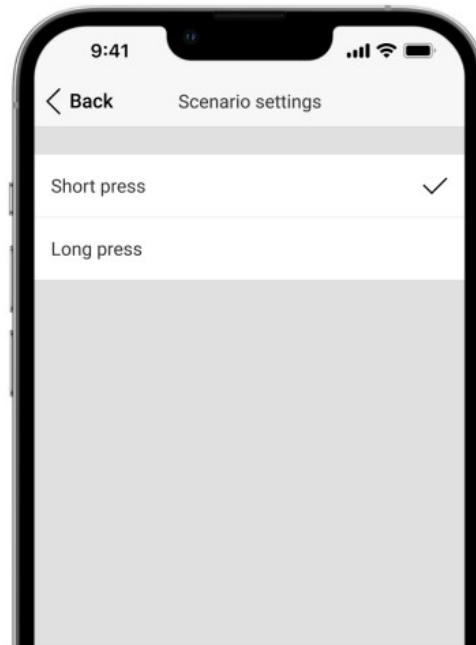


6. Select the automation device to execute the action.

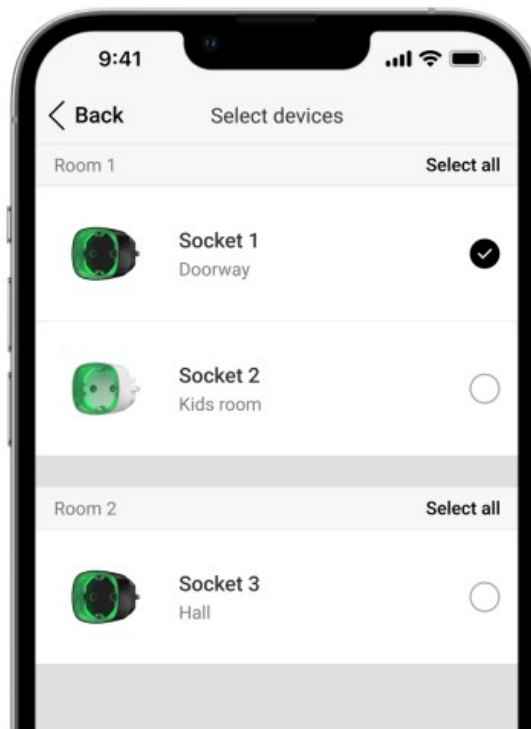

7. Enter the Scenario Name and specify the Device Action to be executed by pressing the Button.

- Switch on
- Switch off
- Switch the state

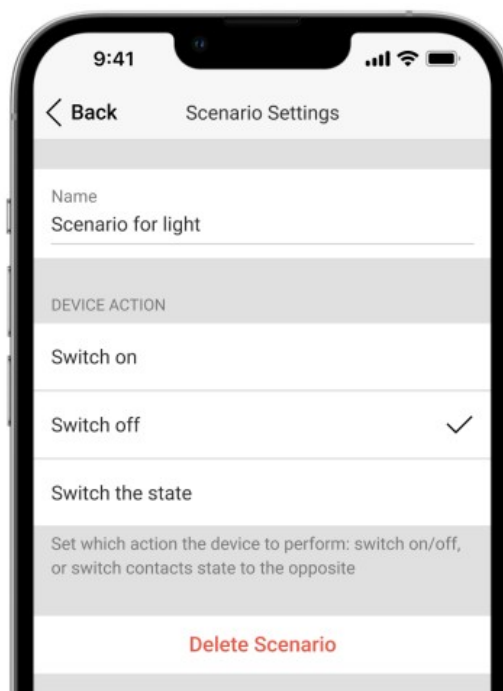

The Device Action setting is unavailable when configuring a scenario for the [automation devices](#) operating in pulse mode. During the scenario execution, such devices will close/open the contacts for a set time. The operating mode and pulse duration are set in the automation device settings.

8. Click Next. The scenario will appear in the list of device scenarios.

Mute Interconnected Fire Detectors Alarm

By pressing the Button, the interconnected fire detectors alarm can be muted (if the corresponding operating mode of the button is selected). The reaction of the system to pressing a button depends on the state of the system:

- The Interconnected Fire Detectors Alarm have already propagated — by the first press of the Button, all remaining detectors sirens are muted, except for those that registered the alarm. Pressing the button again mutes the remaining detectors.
- The interconnected alarms delay time lasts — the siren of the triggered Ajax fire detector is muted by pressing.

[Learn more about Interconnected Fire Detectors Alarm](#)

i With the [OS Malevich 2.12](#) update, users can mute fire alarms in their groups without affecting detectors in the groups to which they do not have access.

[Learn more](#)

Placement

Button can be fixed on a surface or carried around.

How to fix Button

To fix Button on a surface (e. g. under a table), use Holder.



To install the button in the holder:

1. Choose a location to install the holder.
2. Press the button to test whether the commands can reach the hub. If not, choose another location or use a [radio signal range extender](#).

i When connecting Button via radio signal range extender, note that Button does not automatically switch between the radio networks of the radio signal extender and the hub. You can assign Button to another hub or range extender manually in the app.

3. Fix Holder on the surface using the bundled screws or double-sided adhesive tape.
4. Put Button into the holder.

i Please note that Holder is sold separately.

[Buy Holder](#)

How to carry around Button



The button is convenient to carry with you thanks to a special hole on its body. It can be worn on the wrist or around the neck, or hung on a key ring.

Button has an IP55 protection rating. This means that the device body is protected from dust and splashes. Tight buttons are recessed into the body and software protection helps to avoid accidental pressing.

Maintenance

Clean the button body from dust, cobwebs and other contaminants as they appear. Use a soft, dry cloth for cleaning appliances. Never use substances containing alcohol, acetone, gasoline and other active solvents to clean the Button.

The pre-installed battery provides up to 5 years of Button operation in normal use (one press per day). More frequent use may reduce battery life. You can check battery level in the Button states in the Ajax app.

The pre-installed battery is sensitive to low temperatures and if the key fob is cooled significantly, the battery level indicator in the app may show incorrect values until the key fob becomes warmer.

The battery level value is updated each time the button is pressed.

When the battery has run down, the user will receive a notification in the Ajax app, and the LED indicator will smoothly light up red and go out each time the button is pressed.

[How long Ajax devices operate on batteries, and what affects this Battery Replacement](#)

Technical Specifications

Number of buttons	1
LED backlight indicating command delivery	Available
Protection against accidental activation	Available, in panic mode
Radio communication protocol	Jeweller Learn more
Radio frequency band	866.0 – 866.5 MHz 868.0 – 868.6 MHz 868.7 – 869.2 MHz 905.0 – 926.5 MHz 915.85 – 926.5 MHz 921.0 – 922.0 MHz Depends on the region of sale.
Compatibility	Operates with all Ajax hubs , and radio signal range extenders featuring OS Malevich 2.7.102 and later
Maximum radio signal power	Up to 20 mW
Radio signal modulation	GFSK
Radio signal range	Up to 1,300 m (without obstacles)
Power supply	1 CR2032 battery
Battery life	Up to 5 years (depending on frequency of use)
Protection class	IP55
Operating temperature range	From -10°C to +40°C
Operating humidity	Up to 75%
Dimensions	47 × 35 × 13 mm
Weight	16 g
Service life	10 years

[Compliance with standards](#)

Complete Set

1. Button
2. Pre-installed CR2032 battery
3. Double-sided tape
4. Quick start guide

Warranty

The warranty for the products manufactured by the Limited Liability Company “Ajax Systems Manufacturing” is valid for 2 years after purchase and does not extend to the bundled battery.

If the device does not function properly, we recommend that you first contact the support service as technical issues can be resolved remotely in most cases.

[Warranty obligations](#)

[User agreement](#)

Contact technical support:

- e-mail
- [Telegram](#)
- Phone number: 0 (800) 331 911



Subscribe to the newsletter about safe life. No spam


Email

Subscribe



Updated December 21, 2023

Documents / Resources

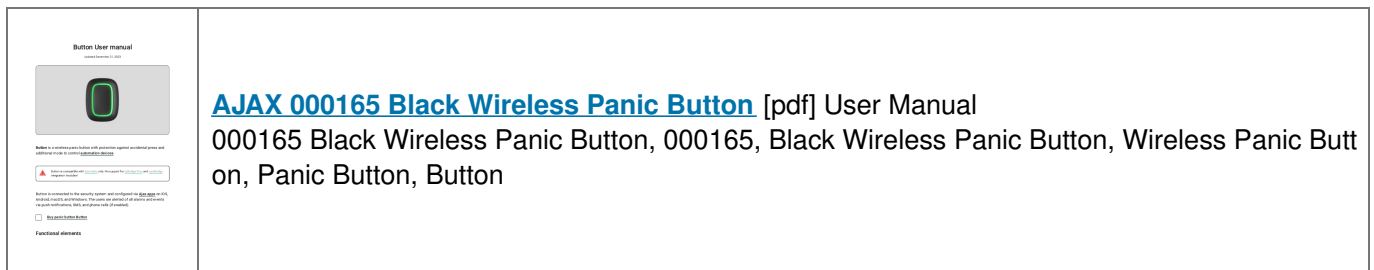

References

- [!\[\]\(6124eb8417e4274bba024eb35c0e9124_img.jpg\) OS Malevich 2.12: Full control over the hub communication and even more features for Ajax sirens | Ajax Systems Blog](#)

- [!\[\]\(772eaad309179eadc0d453409c5b8a86_img.jpg\) End user agreement - Ajax Systems](#)
- [!\[\]\(0c92eae87afd8e406cb2f9e6a9ad3ac2_img.jpg\) Automation devices in the security system | Ajax Systems](#)
- [!\[\]\(3bc2ea6fe8b34a8403f47efb7eadba72_img.jpg\) Wireless panic button with control mode | Ajax Systems](#)
- [!\[\]\(db2c3258ee7e87ee4e634ef7e3495477_img.jpg\) Holder for Button/DoubleButton — Bracket for panic button](#)
- [!\[\]\(2948f837b3cd4e74769462642b6408ab_img.jpg\) Security system control panels | Ajax Systems](#)
- [!\[\]\(da1507fe5416083761c35bb1cc4b8919_img.jpg\) ocBridge Plus — Module for Ajax devices integration with wired systems](#)
- [!\[\]\(31f1122171da6b4d5906e4b74cb657d6_img.jpg\) Signal range extenders in the security system | Ajax Systems](#)
- [!\[\]\(5adc07f5ff67adfc98bf36d12a54c9dc_img.jpg\) Relay — Low current remote control relay with dry contact](#)
- [!\[\]\(f7be870c3fb2e3de5ed9b1341e3704f9_img.jpg\) Alarm sirens for Ajax security systems](#)
- [!\[\]\(205bfe7918d5903c4c8c2562f9b13df6_img.jpg\) Socket \(type F\) — Wireless smart plug with energy monitor](#)
- [!\[\]\(1ddb7015849dce92ab78e22131046019_img.jpg\) uartBridge — Module for Ajax devices integration with third-party wireless alarms systems](#)
- [!\[\]\(c85f8398a487225e1b4e6be30bbd797c_img.jpg\) Ajax WallSwitch — Wireless power relay with energy monitor](#)
- [!\[\]\(171ef5b572d039e2f52700a5a28af2b1_img.jpg\) Software | Ajax Systems](#)
- [!\[\]\(04a1bfebe47d08a9921b081c3cf27aa7_img.jpg\) Ajax devices standards compliance list](#)
- [!\[\]\(f4f6450dc8d6d36c55fc6f60dae1b7a3_img.jpg\) Warranty - Ajax Systems](#)
- [!\[\]\(3a943228c0fb635f88d3cf8f98bfcb21_img.jpg\) Automation | Ajax Systems Support](#)
- [!\[\]\(911d1867116a47ceab456fd7780ead24_img.jpg\) How battery charge is displayed in Ajax apps | Ajax Systems Support](#)
- [!\[\]\(15048cd81fd216d141befd74626fa38b_img.jpg\) How long Ajax devices operate on batteries, and what affects this | Ajax Systems Support](#)
- [!\[\]\(59d0fb588e8501e5aa9305dac6634368_img.jpg\) How to deactivate a device without removing it from the system | Ajax Systems Support](#)
- [!\[\]\(4ab613c60c4c3c64a258342b396dbe2d_img.jpg\) How to replace a battery of the Button | Ajax Systems Support](#)
- [!\[\]\(cc818a566c49e6cff1c9e39d0d18b47f_img.jpg\) Jeweller radio protocol: technology and capabilities | Ajax Systems Support](#)
- [!\[\]\(fa39419cf0ab84641098459ecbf0adbb_img.jpg\) How to create and configure a scenario in the Ajax system | Ajax Systems Support](#)
- [!\[\]\(011ef8fae8e2c3c53f218a070e37329b_img.jpg\) What a residential fire alarm system is and how It works | Ajax Systems Support](#)
- [!\[\]\(9957165e0b5b3b8e72a82ae0a404127c_img.jpg\) What is Interconnected Fire Detectors Alarm and how it works | Ajax Systems Support](#)
- [!\[\]\(622aa7a4752bacd722cae4c7ece53367_img.jpg\) \[support.ajax.systems/wp-content/uploads/2021/12/button-screen_1-en.png\]\(support.ajax.systems/wp-content/uploads/2021/12/button-screen_1-en.png\)](#)
- [!\[\]\(699b59237529bf64aa2f490ef5af98b4_img.jpg\) \[support.ajax.systems/wp-content/uploads/2021/12/button-screen_2-en.png\]\(support.ajax.systems/wp-content/uploads/2021/12/button-screen_2-en.png\)](#)
- [!\[\]\(7c813a4ad82b1dd9cc7cf703f985d363_img.jpg\) \[support.ajax.systems/wp-content/uploads/2021/12/button-screen_3-en.png\]\(support.ajax.systems/wp-content/uploads/2021/12/button-screen_3-en.png\)](#)
- [!\[\]\(3cddaae930fa414dbd52ff0ec5092a10_img.jpg\) \[support.ajax.systems/wp-content/uploads/2021/12/button-screen_4-en.png\]\(support.ajax.systems/wp-content/uploads/2021/12/button-screen_4-en.png\)](#)
- [!\[\]\(dc6c39e7ae035f5123ac0867a1a0f5d0_img.jpg\) \[support.ajax.systems/wp-content/uploads/2021/12/button-screen_5-en.png\]\(support.ajax.systems/wp-content/uploads/2021/12/button-screen_5-en.png\)](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.