

[manuals.plus](#) /

› [Simpson](#) /

› [Simpson 260-8P Relay Protected Analog Multimeter User Manual](#)

Simpson 260-8P

Simpson 260-8P Relay Protected Analog Multimeter User Manual

Model: 260-8P | Brand: Simpson

1. INTRODUCTION

This manual provides comprehensive instructions for the safe and effective use of the Simpson 260-8P Relay Protected Analog Multimeter. The Simpson 260-8P is a robust and accurate instrument designed for various electrical measurements in both laboratory and field environments. It features a large, color-coded, mirrored scale for precise readings, AC frequency response up to 100 kHz, zero RFI, and high-energy overload fusing with a varistor-protected meter movement.

Please read this manual thoroughly before operating the device to ensure proper functionality and safety.

2. SAFETY INFORMATION

WARNING: Electrical shock hazard. Improper use of this multimeter can result in injury or death. Always follow safety precautions.

- Always inspect the multimeter, test leads, and accessories for damage before use. Do not use if damaged.
- Ensure the correct function and range are selected before connecting the test leads to the circuit under test.
- Do not attempt to measure voltages or currents exceeding the maximum ratings specified for the instrument.
- Avoid contact with live circuits. Use only one hand when making measurements on high-voltage circuits.
- Always disconnect power to the circuit before measuring resistance or continuity.
- Replace batteries promptly when the low battery indicator appears to maintain measurement accuracy.
- Do not operate the multimeter in wet or damp conditions.

3. PRODUCT OVERVIEW

The Simpson 260-8P Analog Multimeter features a classic design optimized for clear readings and durable performance. Key components include the meter movement, range selector switch, and input jacks.



Figure 1: Front view of the Simpson 260-8P Analog Multimeter. This image displays the large analog meter dial, the central rotary range selector switch, and the various input jacks located at the bottom and sides of the unit. A carrying handle is visible at the top.

3.1. Components

- **Analog Meter Dial:** Displays measurement values using a needle against a calibrated scale. Features a mirrored scale to reduce parallax error.
- **Range Selector Switch:** A rotary switch used to select the desired measurement function (ACV, DCV, DCA, Ohms) and range.
- **Input Jacks:** Terminals for connecting test leads. Typically includes common (negative) and positive input jacks for various measurements.
- **Zero Ohms Adjustment:** A control used to zero the meter before making resistance measurements.
- **Overload Protection:** Internal relay and fusing system to protect the meter movement from excessive current or voltage.

4. SETUP

4.1. Unpacking and Inspection

Carefully remove the multimeter and its accessories from the packaging. Inspect all components for any signs of damage. If any damage is found, do not use the device and contact your supplier.

4.2. Battery Installation

The Simpson 260-8P requires 1.5V and 9V batteries for operation, particularly for resistance measurements. Refer to the battery compartment cover (usually on the back or side) for specific battery types and polarity. Ensure batteries are installed correctly.

4.3. Connecting Test Leads

The multimeter comes with probe test leads equipped with alligator clips. Connect the black test lead to the COMMON (negative) jack and the red test lead to the positive (+) jack appropriate for your measurement type (e.g., for voltage, resistance, or current).

5. OPERATING INSTRUCTIONS

Before making any measurement, ensure the multimeter is set to the correct function and range. Always start with a higher range and decrease if necessary to avoid overloading the meter.

5.1. Reading the Analog Scale

The Simpson 260-8P features a large, multi-colored scale. Identify the correct scale for your selected function and range. The mirrored strip on the scale helps eliminate parallax error: align your eye so that the needle and its reflection are superimposed.

5.2. Measuring DC Voltage (DCV)

1. Connect the black test lead to the COMMON jack and the red test lead to the positive (+) jack.
2. Set the range selector switch to the desired DCV range. If the voltage is unknown, start with the highest DCV range.
3. Connect the test probes in parallel across the component or circuit to be measured.
4. Read the voltage value from the appropriate DCV scale on the meter dial.

5.3. Measuring AC Voltage (ACV)

1. Connect the black test lead to the COMMON jack and the red test lead to the positive (+) jack.
2. Set the range selector switch to the desired ACV range. If the voltage is unknown, start with the highest ACV range.
3. Connect the test probes in parallel across the component or circuit to be measured.
4. Read the voltage value from the appropriate ACV scale on the meter dial. The Simpson 260-8P has an AC frequency response up to 100 kHz.

5.4. Measuring DC Current (DCA)

CAUTION: Never connect the multimeter in parallel for current measurements. Always connect in series with the circuit.

1. **Turn off power to the circuit.**
2. Connect the black test lead to the COMMON jack and the red test lead to the appropriate current jack (e.g., for mA or A).
3. Set the range selector switch to the desired DCA range. Start with the highest range if the current is unknown.
4. Open the circuit where current is to be measured and connect the multimeter in series.
5. Restore power to the circuit.
6. Read the current value from the appropriate DCA scale.
7. **Turn off power** before disconnecting the multimeter and restoring the circuit.

5.5. Measuring Resistance (Ohms)

CAUTION: Ensure the circuit is de-energized and all capacitors are discharged before measuring resistance.

1. Connect the black test lead to the COMMON jack and the red test lead to the positive (+) jack.
2. Set the range selector switch to the desired Ohms (Ω) range.
3. **Zero Ohms Adjustment:** Short the test leads together. Adjust the "Zero Ohms" knob until the needle points exactly to zero on the Ohms scale. This step must be performed for each resistance range selected.
4. Connect the test probes across the component to be measured.
5. Read the resistance value from the Ohms scale.

5.6. Overload Protection

The Simpson 260-8P features relay-protected circuitry and high-energy overload fuses. In case of an overload, the internal protection system will activate to prevent damage to the meter movement. If an overload occurs, disconnect the meter, check the circuit, and reset the meter if necessary (refer to specific instructions in the full manual if available, or contact support).

6. MAINTENANCE

6.1. Battery Replacement

When the meter's accuracy for resistance measurements begins to degrade, or if the needle cannot be zeroed on the Ohms scale, it is likely time to replace the internal 1.5V and 9V batteries. Refer to the battery compartment for access and ensure correct polarity during replacement. Use only specified battery types.

6.2. Cleaning

Clean the exterior of the multimeter with a soft, damp cloth. Do not use abrasive cleaners or solvents. Ensure the device is powered off and disconnected from any circuits before cleaning.

6.3. Fuse Replacement

The Simpson 260-8P is equipped with high-energy overload fuses. If the meter ceases to function on a particular current or voltage range after an overload event, a fuse may need replacement. Fuse replacement should only be performed by qualified personnel. Refer to the full service manual for fuse specifications and replacement procedures.

7. TROUBLESHOOTING

This section addresses common issues you might encounter with your Simpson 260-8P multimeter.

- **Meter does not respond:**

- Check battery condition, especially for resistance measurements.
- Ensure test leads are properly connected and not damaged.
- Verify the range selector is set correctly.
- Check for blown fuses (if applicable to the function).

- **Inaccurate resistance readings:**

- Perform the "Zero Ohms" adjustment for the selected range.
- Replace batteries if they are weak.
- Ensure the circuit under test is completely de-energized.

- **Needle does not move or moves erratically:**

- Ensure proper connection to the circuit.
- Verify the selected range is appropriate for the measurement.
- If the meter was subjected to a severe overload, internal damage may have occurred. Contact service.

8. SPECIFICATIONS


Feature	Specification
Model Number	260-8P (Manufacturer Model: 2000607)
Product Type	Analog Multimeter
Brand	Simpson
Power Source	Battery Powered (1.5V and 9V batteries)
Overload Protection	Relay Protected, High Energy Overload Fusing, Varistor Protected Meter Movement
AC Frequency Response	Up to 100 kHz
Dimensions (L x W x H)	4.85 x 7.15 x 10.4 inches
Weight	3.87 Pounds
Included Accessories	1.5 V and 9 V Batteries, Probe Test Leads With Alligator Clips
Certifications	UL 1244 Listed


9. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the documentation included with your purchase or contact Simpson Electric Co. directly. Keep your purchase receipt as proof of purchase.
Manufacturer: SIMPSON ELECTRIC CO

© 2023 Simpson Electric Co. All rights reserved.

Related Documents - 260-8P

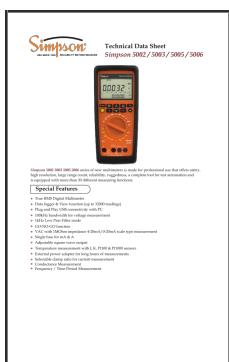	<p>Simpson 5002/5003/5005/5006 Series Multimeters: Technical Data Sheet</p> <p>Explore the comprehensive technical specifications and features of the Simpson 5002, 5003, 5005, and 5006 series multimeters. This document details their advanced capabilities, including True RMS, data logging, USB connectivity, and diverse measurement functions, designed for professional use.</p>
--	---

	<p>Simpson 260 Series 6XLM Volt-Ohm-Milliammeter Instruction Manual</p> <p>This manual provides detailed instructions for operating and maintaining the Simpson 260 Series 6XLM Volt-Ohm-Milliammeter. It covers safety precautions, technical specifications, operation procedures for various measurements (DC/AC voltage, current, resistance), and servicing information.</p>
	<p>Simpson SWF8025DQWA & SWF7025EQWA Washing Machine User Manual</p> <p>Comprehensive user manual for Simpson SWF8025DQWA and SWF7025EQWA front-load washing machines. Includes installation, operation, care, troubleshooting, and warranty information.</p>
	<p>Simpson Hot Water Pressure Washer Trailer Use and Care Manual</p> <p>Comprehensive use and care manual for Simpson Hot Water Pressure Washer Trailers, covering safety, operation, maintenance, and troubleshooting to ensure optimal performance and user safety.</p>
	<p>Simpson GIMA 400 Modbus Communications Manual</p> <p>Technical documentation for the Simpson GIMA 400 meter detailing Modbus communications, setup, connection, protocol, and data registers. Includes specifications and safety information.</p>
	<p>Simpson 555 Tube Tester User Manual</p> <p>Comprehensive user guide for the Simpson 555 Tube Tester, detailing operation, specifications, and maintenance for accurate electronic component testing. Includes supporting instruments for OM and SWL.</p>

Documents - Simpson – 260-8P




[\[pdf\] User Manual Instructions Specifications](#)

A9R8E24 tmp Simpson 260 Series 8P Volt Ohm Milliammeters Instruction Manual Electric Company

Analog VOM Manuals simpsonelectric File manuals |||

Simpson 260 Series 8P Volt-Ohm-Milliammeters INSTRUCTION MANUAL About this Manual To the best of o ... of a mixture of AC and DC voltage. This occurs primarily in amplifier circuits. New Features in the **260-8P** are: 0 - 25V AC/DC Range Continuity Test Alarm Individual Dual Jacks for the 500V AC/DC and 1...

lang:en score:44 filesize: 771.29 K page_count: 32 document date: 2022-04-19

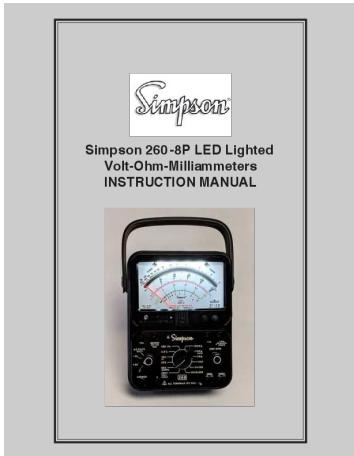


[\[pdf\]](#) User Manual Instructions Specifications

A9R8E24 tmp Simpson 260 Series 8P Volt Ohm Milliammeters Instruction Manual Electric Company LED
Analog VOM Manuals simpsonelectric File manuals |||

Simpson 260 -8P LED Lighted Volt-Ohm-Milliammeters INSTRUCTION MANUAL

About this Manual To the best of a mixture of AC and DC voltage. This occurs primarily in amplifier circuits. New Features in the **260-8P** are: 0 - 25V AC/DC Range Continuity Test Alarm Individual Dual Jacks for the 500V AC/DC and 1...

lang:en score:44 filesize: 4.39 M page_count: 32 document date: 2022-08-15

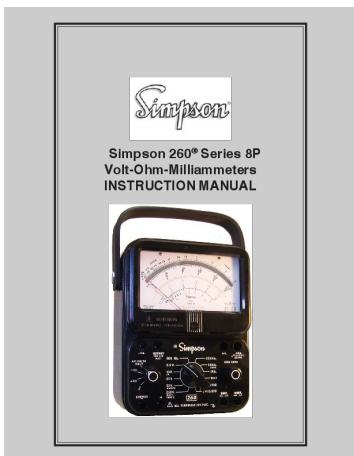


[pdf] User Manual Instructions Specifications

A9R8E24 tmp Simpson 260 Series 8P Volt Ohm Milliammeters Instruction Manual Electric Company
Analog VOM Manuals 8Pman simpsonelectric File Operator s 8 |||

Simpson 260 Series 8P Volt-Ohm-Milliammeters INSTRUCTION MANUAL About this Manual To the best of o ... of a mixture of AC and DC voltage. This occurs primarily in amplifier circuits. New Features in the **260-8P** are: 0 - 25V AC/DC Range Continuity Test Alarm Individual Dual Jacks for the 500V AC/DC and 1...

lang:en score:42 filesize: 442.45 K page_count: 32 document date: 2017-06-19

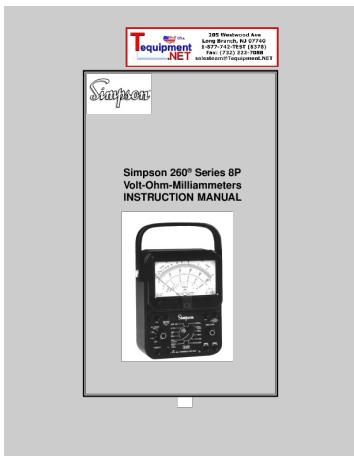


[\[pdf\]](#) User Manual Instructions Specifications Declaration of Conformity

Instruction manual Cole Parmer QUICK START OPERATION After the unit has been set up you are ready to use it. 260 8p doc 2 res cloudinary iwh image upload q auto q center assets 1 26 Documents Simpson 8P

Simpson 260 Series 8P Volt-Ohm-Milliammeters INSTRUCTION MANUAL About this Manual To the best of o ... of a mixture of AC and DC voltage. This occurs primarily in amplifier circuits. New Features in the **260-8P** are: 0 - 25V AC/DC Range Continuity Test Alarm Individual Dual Jacks for the 500V AC/DC and 1...

lang:en score:41 filesize: 509.44 K page_count: 32 document date: 2009-02-05

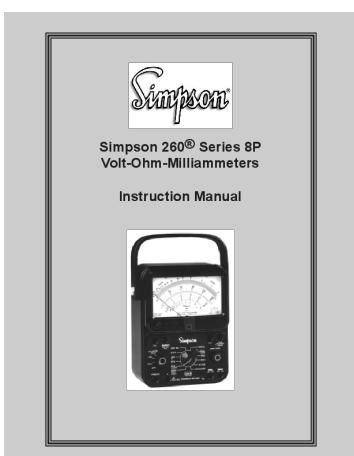


[pdf] User Manual Instructions Specifications

Simpson 260 Series 8P Volt Ohm Milliammeters Instruction Manual Electric Company 260® 6 1

INTRODUCTION General Description The Milliammeter hereafter referred to as the or Instrument is a rugged accurate compact easy use simpson 8p manual instrumentation2000 pub media |||

Simpson 260 Series 8P Volt-Ohm-Milliammeters Instruction Manual About this Manual To the best of our knowledge, this instrument is not subject to any of a mixture of AC and DC voltage. This occurs primarily in amplifier circuits. New Features in the **260-8P** are: 0 - 25V AC/DC Range Continuity Test Alarm Individual Dual Jacks for the 500V AC/DC and 1...

lang:en score:39 filesize: 398.43 K page_count: 31 document date: 2014-03-31

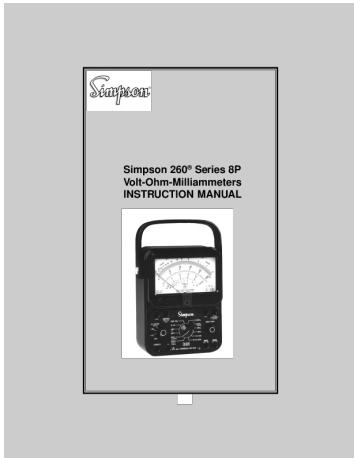


[\[pdf\] User Manual Instructions Specifications](#)

Simpson 260 Series 8P Volt Ohm Milliammeters INSTRUCTION 260® This Operator's Manual contains warning headings which alert the user to check for hazardous conditions. These appear throughout this manual where applicable and are defined below. To ensure safety of operating performance in instrument these instructions must be adhered to! Warning refer accompanying documents About best our knowledge at time written information contained document is technically correct procedures 20006 07 pim resources coleparmer instruction

Simpson 260 Series 8P Volt-Ohm-Milliammeters INSTRUCTION MANUAL About this Manual To the best of our knowledge of a mixture of AC and DC voltage. This occurs primarily in amplifier circuits. New Features in the **260-8P** are: 0 - 25V AC/DC Range Continuity Test Alarm Individual Dual Jacks for the 500V AC/DC and 1...

lang:en score:39 filesize: 255.94 K page_count: 32 document date: 2001-12-19

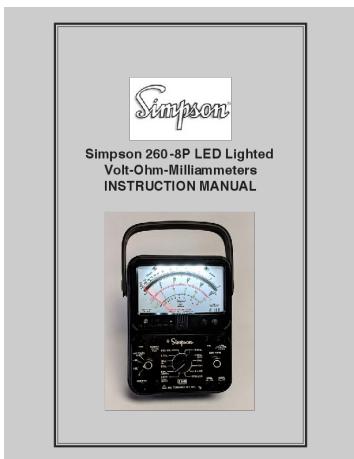

[\[pdf\] User Manual Instructions Specifications Datasheet](#)

A9R8E24 tmp Simpson 260 Series 8P Volt Ohm Milliammeters Instruction Manual Electric Company Multimètres et voltmètres Mouser Luxembourg LED 3007358 mouser datasheet 2 370 event product category test |||

Simpson 260-8P LED Lighted Volt-Ohm-Milliammeters INSTRUCTION MANUAL About this Manual To the best of our knowledge of a mixture of AC and DC voltage. This occurs primarily in amplifier circuits. New Features in the **260-8P** are: 0 - 25V AC/DC Range Continuity Test Alarm Individual Dual Jacks for the 500V AC/DC and 1...


lang:en score:36 filesize: 3.07 M page_count: 33 document date: 2022-08-15



[\[pdf\] User Manual Catalog](#)

untitled Miller Electric Digi Meter RMS AC DC Instruction manual 7441614 archive.org manualzilla id Electrical Test Equipment Ammeters Bar to Bar Testers Brush Tension Scales Coil Testers Megohm Testers Dimensions: 7.32 x 3.42 x 1.39 186 x 87 x 35.5 mm V.A.O. Simpson Models 260-8 and **260-8P** Features: Model 260-8 -- world famous; offers movement overload protection, input protection, and...

lang:en score:32 filesize: 408.45 K page_count: 13 document date: 2011-01-28

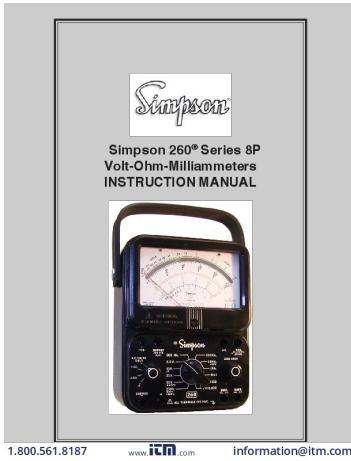


[\[pdf\]](#) User Manual Instructions Specifications

manual Simpson 260 8PRT Analog Multimeter 6 Functions 12392 item s cache |||

Simpson 260 Series 8P Volt-Ohm-Milliammeters INSTRUCTION MANUAL

1.800.561.8187 www. .com informa ... of a mixture of AC and DC voltage. This occurs primarily in amplifier circuits. New Features in the **260-8P** are: 0 - 25V AC/DC Range Continuity Test Alarm Individual Dual Jacks for the 500V AC/DC and 1...

lang:en score:29 filesize: 470.52 K page_count: 27 document date: 0000-00-00

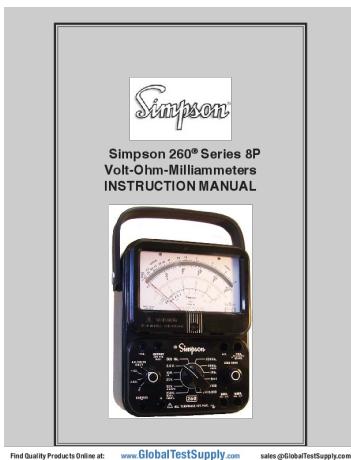


[\[pdf\]](#) User Manual Instructions Specifications

manual Simpson 2608P Analog VOM Meter with Relay Protection 12391 globaltestsupply s cache |||

Simpson 260 Series 8P Volt-Ohm-Milliammeters INSTRUCTION MANUAL Find Quality Products Online at: ww ... of a mixture of AC and DC voltage. This occurs primarily in amplifier circuits. New Features in the **260-8P** are: 0 - 25V AC/DC Range Continuity Test Alarm Individual Dual Jacks for the 500V AC/DC and 1...

lang:en score:29 filesize: 452.92 K page_count: 27 document date: 0000-00-00

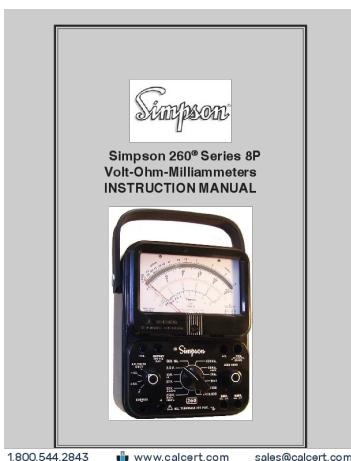

[\[pdf\]](#) User Manual Instructions Specifications Datasheet

ITM Datasheet Template manual Simpson 2608P Analog VOM Meter with Relay Protection 12391 calcert s cache |||

Simpson 260 Series 8P Volt-Ohm-Milliammeters INSTRUCTION MANUAL

1.800.544.2843 15 10 20 5 25 ... of a mixture of AC and DC voltage. This occurs primarily in amplifier circuits. New Features in the **260-8P** are: 0 - 25V AC/DC Range Continuity Test Alarm Individual Dual Jacks for the 500V AC/DC and 1...

lang:en score:28 filesize: 588.7 K page_count: 27 document date: 2022-03-29



[\[pdf\]](#) User Manual Instructions Specifications

Simpson 260® Series 8P Volt Ohm12392 manualitm s cache itm 12392 manual srsltd


AfmBOoqq4odrlsBrRTuAsQ6QINHRUM XZPeQVVDGQlwZBmJdGVBoD7my OhmSimpson Ohmitm
XZPeQVVDGQlwZBmJdGVBoD7myitm

AfmBOoqODPnjvSjjEl5OW8P2UuGDb4LDGmoM8ZyRSeVz6nTeSE2yoS94 |||

Simpson 260 Series 8P Volt-Ohm-Milliammeters INSTRUCTION MANUAL

1.800.561.8187 www. .com informa ... of a mixture of AC and DC voltage. This occurs primarily in amplifier circuits. New Features in the **260-8P** are: 0 - 25V AC/DC Range Continuity Test Alarm Individual Dual Jacks for the 500V AC/DC and 1...

lang:en score:27 filesize: 470.52 K page_count: 27 document date: 2019-09-17

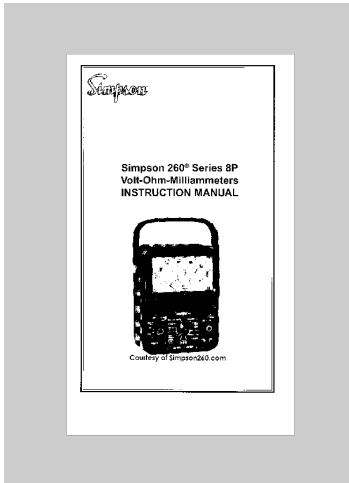

[pdf] User Manual Specifications

Untitled simpson 260 8p user manual userequip files specs 7161

...

lang:en score:26 filesize: 295.31 K page_count: 32 document date: 2007-02-02

NEW 260-8P LED Lighted Particulate Resistant Analog VOM

Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring fluctuating trends and rates. The NEW 260-8P "Lighted" features more attributes than its predecessors including a relay overload protection circuit that is resettable and also provides audible continuity checking.

Features & Benefits

- Lighted dial with gasketed cover (extreme particulate/moisture protection)
- Rechargeable (USB) lighting system
- LED and sound continuity indicator
- LED flashlight and protected charge port (on back)
- LED flashlight and protected charge port (on back)
- 36 measurement ranges - AC and DC voltage, current measurements, and resistance testing
- Safeguarded connections to prevent operator tool contact with electrical connections
- Easy to operate - two knobs control the selection of functions and ranges
- Rugged phenolic case with reinforced walls for maximum durability

MADE IN THE USA

1 Year Warranty

Order Part #12402

Simpson Electric
P.O. Box 99
1200 Sherman Avenue
Lewiston, Minnesota 55354-0099
P: (712) 588-7547
F: (712) 588-7546
www.simponelectric.com

[pdf]

SE 260 8P LED Lighted Analog VOM 12402 Sell Sheet Final Web simpsonelectric 2022 06 |||

260-8P LED Lighted Analog VOM Made in the USA NEW 260-8P LED Lighted Particulate Resistant Analog VOM Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring fluctuating trends and rates. The NEW 260-8P Lighted features more attributes tha...

lang:en score:23 filesize: 871.48 K page_count: 2 document date: 2022-04-11

UPGRADE NOW! TO THE NEW 260-8P LED Lighted Analog VOM

Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring fluctuating trends and rates. The NEW 260-8P "Lighted" features more attributes than its predecessors including a relay overload protection circuit that is resettable and also provides audible continuity checking.

Features & Benefits

- Rechargeable (USB) lighting system
- LED and sound continuity indicator
- LED flashlight and protected charge port
- LED flashlight and protected charge port (on back)
- 36 measurement ranges - AC and DC voltage, current measurements, and resistance testing
- Safeguarded connections to prevent operator tool contact with electrical connections
- Easy to operate - two knobs control the selection of functions and ranges
- Rugged phenolic case with reinforced walls for maximum durability

MADE IN THE USA

1 Year Warranty

Order Part #12404

Simpson Electric
P.O. Box 99
1200 Sherman Avenue
Lewiston, Minnesota 55354-0099
P: (712) 588-7547
F: (712) 588-7546
www.simponelectric.com

[pdf] Warranty

SE 260 8P LED Lighted Analog VOM 12402 Sell Sheet Final 12404 simpsonelectric File sellsheets |||

UPGRADE NOW TO THE NEW 260-8P LED Lighted Analog VOM Made in the USA NEW 260-8P LED Lighted Analog VOM Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring fluctuating trends and rates. The NEW 260-8P Lighted features more attributes tha...

lang:en score:23 filesize: 1.83 M page_count: 2 document date: 2022-08-02

[pdf] Datasheet

DatasheetSimpson 260 8P Analog Multimeter with Relay Protection Electronix Express01260 8Pcdn
shopify s files 1 0268 7746 0673 01260 v 1625850689 |||

900 Hart Street Rahway, NJ 07065, U.S.A. <http://www.elexp.com> email: electron@elexp.com Part Nos. 01260-8 and **01260-8P** 260-8 **260-8P** Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring...

lang:en score:21 filesize: 136.44 K page_count: 1 document date: 2012-10-09

[pdf] Datasheet

Simpson 260 8 8P Analog VOM Electric Company simpson datasheet instrumentation2000 pub media ||| 260-8 **260-8P** Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring fluctuating trends and rates. The 260-8 features more attributes than its predecessors. Standard and high-energy fusin...

lang:en score:20 filesize: 157.55 K page count: 3 document date: 2016-01-22

The cover of the Simpson Test Equipment Catalog. The top half is orange with the Simpson logo in a white, cursive script. The bottom half is white with the text 'Test Equipment Catalog' in a large, bold, black serif font.

[\[pdf\]](#) Catalog

Simpson Test Equipment Catalog Electric Company simpson testequipment catalog wolfautomation content |||

Test Equipment Catalog No One Beats Simpson on Quality When asked why they buy Simpson Products, ... SP Industrial Safety VOM

3 260-8 260-8P Analog VOM

When a Digital Multimeter won't do the Job

The 260-8® and 260-8P® Analog VOMs from Simpson are designed to measure the best SMD components and assemblies.

The 260-8 features more options than its predecessor. Standard and high frequency AC/DC voltage, AC/DC current, and resistance measurements are included. The 260-8P adds a frequency response measurement.

With the 260-8 and 260-8P, you can measure the quality of the SMD components and assemblies that you produce without actually de-icing.

• 260-8 Measurement Range: Green (left) and Red (right) and Current

• **AC/DC Voltage:** 0.1V to 300V AC/DC with 1000V CAT III safety voltage limit.

• **AC/DC Current:** 0.001A to 100A DC with earth connection of the current probe.

• **Overload Protection:** Indication present on front panel and digital display.

• **Diode Test:** Diodes are tested with a built-in voltage source.

• **Rugged Construction:** The housing is designed to withstand rough handling with no damage to the internal components.

• **Parallel:** For the 260-8 and 260-8P, the AC/DC Amps can be connected in parallel to increase the current measurement range.

• **Variable:** Full or half scale with standard choices for probe or objective glass. Eliminate the need to change while testing.

• **Simple Operation:** The knobs control the selection of ranges and functions.

Specifications

AC VOLTMETERS

Range

0.1V, 1V, 10V, 100V

1000V CAT III

Accuracy

±0.5%

±0.2%

Resolution

0.001V, 0.01V, 0.1V

0.001A, 0.01A, 0.1A

Display

3 1/2 digits

3 1/2 digits

Frequency

0.1Hz to 100Hz

0.1Hz to 100Hz

Temperature

0°C to 100°C

0°C to 100°C

Accuracy

±0.5%

±0.2%

Resolution

0.01°C

0.01°C

Display

3 1/2 digits

3 1/2 digits

AC/DC AMMETERS

Range

0.001A to 100A

0.001A to 100A

Accuracy

±0.5%

±0.2%

Resolution

0.001A, 0.01A, 0.1A

0.001A, 0.01A, 0.1A

Display

3 1/2 digits

3 1/2 digits

AC/DC OHMMETERS

Range

0.001Ω to 100MΩ

0.001Ω to 100MΩ

Accuracy

±0.5%

±0.2%

Resolution

0.001Ω, 0.01Ω, 0.1Ω

0.001Ω, 0.01Ω, 0.1Ω

Display

3 1/2 digits

3 1/2 digits

AC/DC FREQUENCY

Range

0.1Hz to 100Hz

0.1Hz to 100Hz

Accuracy

±0.5%

±0.2%

Resolution

0.01Hz

0.01Hz

Display

3 1/2 digits

3 1/2 digits

AC/DC DIODE TEST

Range

0.001A to 100A

0.001A to 100A

Accuracy

±0.5%

±0.2%

Resolution

0.001A, 0.01A, 0.1A

0.001A, 0.01A, 0.1A

Display

3 1/2 digits

3 1/2 digits

AC/DC THERMOMETERS

Range

0°C to 100°C

0°C to 100°C

Accuracy

±0.5%

±0.2%

Resolution

0.01°C

0.01°C

Display

3 1/2 digits

3 1/2 digits

AC/DC FREQUENCY

Range

0.1Hz to 100Hz

0.1Hz to 100Hz

Accuracy

±0.5%

±0.2%

Resolution

0.01Hz

0.01Hz

Display

3 1/2 digits

3 1/2 digits

AC/DC OHMMETERS

Range

0.001Ω to 100MΩ

0.001Ω to 100MΩ

Accuracy

±0.5%

±0.2%

Resolution

0.001Ω, 0.01Ω, 0.1Ω

0.001Ω, 0.01Ω, 0.1Ω

Display

3 1/2 digits

3 1/2 digits

AC/DC FREQUENCY

Range

0.1Hz to 100Hz

0.1Hz to 100Hz

Accuracy

±0.5%

±0.2%

Resolution

0.01Hz

0.01Hz

Display

3 1/2 digits

3 1/2 digits

AC/DC DIODE TEST

Range

0.001A to 100A

0.001A to 100A

Accuracy

±0.5%

±0.2%

Resolution

0.001A, 0.01A, 0.1A

0.001A, 0.01A, 0.1A

Display

3 1/2 digits

3 1/2 digits

AC/DC THERMOMETERS

Range

0°C to 100°C

0°C to 100°C

Accuracy

±0.5%

±0.2%

Resolution

0.01°C

0.01°C

Display

3 1/2 digits

3 1/2 digits

AC/DC FREQUENCY

Range

0.1Hz to 100Hz

0.1Hz to 100Hz

Accuracy

±0.5%

±0.2%

Resolution

0.01Hz

0.01Hz

Display

3 1/2 digits

3 1/2 digits

AC/DC OHMMETERS

Range

0.001Ω to 100MΩ

0.001Ω to 100MΩ

Accuracy

±0.5%

±0.2%

Resolution

0.001Ω, 0.01Ω, 0.1Ω

0.001Ω, 0.01Ω, 0.1Ω

Display

3 1/2 digits

3 1/2 digits

AC/DC FREQUENCY

Range

0.1Hz to 100Hz

0.1Hz to 100Hz

Accuracy

±0.5%

±0.2%

Resolution

0.01Hz

0.01Hz

Display

3 1/2 digits

3 1/2 digits

AC/DC DIODE TEST

Range

0.001A to 100A

0.001A to 100A

Accuracy

±0.5%

±0.2%

Resolution

0.001A, 0.01A, 0.1A

0.001A, 0.01A, 0.1A

Display

3 1/2 digits

3 1/2 digits

AC/DC THERMOMETERS

Range

0°C to 100°C

0°C to 100°C

Accuracy

±0.5%

±0.2%

Resolution

0.01°C

0.01°C

Display

3 1/2 digits

3 1/2 digits

AC/DC FREQUENCY

Range

0.1Hz to 100Hz

0.1Hz to 100Hz

Accuracy

±0.5%

±0.2%

Resolution

0.01Hz

0.01Hz

Display

3 1/2 digits

3 1/2 digits

AC/DC OHMMETERS

Range

0.001Ω to 100MΩ

0.001Ω to 100MΩ

Accuracy

±0.5%

±0.2%

Resolution

0.001Ω, 0.01Ω, 0.1Ω

0.001Ω, 0.01Ω, 0.1Ω

Display

3 1/2 digits

3 1/2 digits

AC/DC FREQUENCY

Range

0.1Hz to 100Hz

0.1Hz to 100Hz

Accuracy

±0.5%

±0.2%

Resolution

0.01Hz

0.01Hz

Display

3 1/2 digits

3 1/2 digits

AC/DC DIODE TEST

Range

0.001A to 100A

0.001A to 100A

Accuracy

±0.5%

±0.2%

Resolution

0.001A, 0.01A, 0.1A

0.001A, 0.01A, 0.1A

Display

3 1/2 digits

3 1/2 digits

</div

[pdf]

blackSimplogo mStanchiu simpson 2608 329385 mouser ds 2 370 ||

260-8 **260-8P** Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring fluctuating trends and rates. The 260-8 features more attributes than its predecessors. Standard and highenergy fusing ...

lang:en score:19 filesize: 494.98 K page_count: 2 document date: 2012-12-06

[pdf] Datasheet

A9RE789 tmp Simpson 260 8 8P Analog VOM Electric Company 2608 275612 mouser datasheet 2 370

11

260-8 **260-8P** Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when The 260-8 features more attributes than its predecessors. Standard and high-energy fusing in conjunction with diode network meter...

lang:en score:19 filesize: 148.41 K page count: 4 document date: 2017-06-12

Simpson

Simpson 260® Series 8P Volt-Ohm-Milliammeters INSTRUCTION MANUAL

[pdf] User Manual Instructions Specifications

Simpson 260 series 8P userSupporting instruments for OM and SWLgproxyradiomanual info schema ACC instrument user III

About this Manual To the best of our knowledge and at the time written, the information contained in this manual is accurate. It is possible that some of the information contained in this manual is not applicable to all models of the 260-8P. This occurs primarily in amplifier circuits. New Features in the **260-8P** are: 0 - 25V AC/DC Range Continuity Test Alarm Individual Dual Jacks for the 500V AC/DC and 1

lang:en score:19 filesize: 281.84 K page_count: 32 document_date: 2025-05-28

Simpson Renew Kit Made in the USA

Refresh your Simpson 260 meter to its original "like new" look for use or display.

Features & Benefits

- Kit includes all necessary components
- Easy-to-follow installation instructions (1-2 hours to complete)
- Allows for investigative cleaning and inspection of meter
- Add value to your meter and create a multi-generational heirloom
- Ready to ship
- Supported by Simpson Electric Distribution partners
- MADE IN THE USA

Order Part #48757 for the 260-8
Order Part #48758 for the 260-8P

Special Offer
Receive a 10% discount on calibration or accessories (leads and case).
Free subscription to Simpson new product updates and announcements.

Complete Kit Assembly

Panel Assembly
Hardware
Front Cover

Simpson Electric
P.O. Box 79
220 South Avenue
Lodi, New Jersey 07644-0079
P: (732) 589-2947
F: (732) 589-7246
www.simponelectric.com

Simpson MADE IN THE USA RELIABILITY BEYOND MEASURE

260-8® & 260-8P® Analog VOM

When a Digital Multimeter won't do the Job
Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring fluctuating trends and rates.

The 260-8 features more attributes than its predecessors. Standard and high-energy fusing in conjunction with diode network meter movement technology make the 260-8 the best combination of quality and affordability.

The 260-8P has an additional relay overload protection circuit for leads and also provides audible continuity checking.

• 30 Measurement Ranges - Covers both AC and DC Voltage and Current measurements, as well as resistance testing

• Connections Safeguarded - Standard size reverse-polarity safety jacks prevent operator and/or tool contact with electrical connections of the instrument

• Overload Protection - Diode network protects instrument from overload damage during use (260-8P only - 260-8PRT only)

• Rugged Construction - The Phenolic case is designed with heavy reinforced walls for maximum durability; self-shielding taft-band provides added shock resistance for the meter and its leads

• Portable, for the Workshop, Lab, or in the Field - Portable enough to carry with benchtop accuracy

• Versatile - Fully-scaled test leads with threaded probe tips for screw-on alligator clips. Eliminate need to change test leads while working

• Simple Operation - Two knobs control the selection of ranges and functions

Simpson MADE IN THE USA RELIABILITY BEYOND MEASURE

260-8® & 260-8P® Analog VOM

When a Digital Multimeter won't do the Job
Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring fluctuating trends and rates.

The 260-8 features more attributes than its predecessors. Standard and high-energy fusing in conjunction with diode network meter movement technology make the 260-8 the best combination of quality and affordability.

The 260-8P has an additional relay overload protection circuit for leads and also provides audible continuity checking.

• 30 Measurement Ranges - Covers both AC and DC Voltage and Current measurements, as well as resistance testing

• Connections Safeguarded - Standard size reverse-polarity safety jacks prevent operator and/or tool contact with electrical connections of the instrument

• Overload Protection - Diode network protects instrument from overload damage during use (260-8P only - 260-8PRT only)

• Rugged Construction - The Phenolic case is designed with heavy reinforced walls for maximum durability; self-shielding taft-band provides added shock resistance for the meter and its leads

• Portable, for the Workshop, Lab, or in the Field - Portable enough to carry with benchtop accuracy

• Versatile - Fully-scaled test leads with threaded probe tips for screw-on alligator clips. Eliminate need to change test leads while working

• Simple Operation - Two knobs control the selection of ranges and functions

[\[pdf\] Instructions Accessories](#)

SE Renew Kit Sell Sheet v4 Simpson Electric simpsonelectric File |||

Simpson Renew Kit MadeintheUSA Simpson Renew Kit Refurbish your Simpson 260 meter to its original ... MADE IN THE USA Complete Kit Assembly Order Part #48757 for the 260-8 Order Part #48758 for the 260-8P Special Offer Receive a 10 discount on calibration or accessories leads and case . Free su...

lang:en score:19 filesize: 516.05 K page_count: 1 document date: 2021-06-24

[\[pdf\] Datasheet](#)

Simpson 260 8P Analog VOM Electric Company 1909145 farnell datasheets |||

260-8 260-8P Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring fluctuating trends and rates. The 260-8 features more attributes than its predecessors. Standard and high-energy fusing in conjunction with diode network meter movement technology make the 260-8 the best combination of quality and affordability.

lang:en score:19 filesize: 856.58 K page_count: 3 document date: 2015-04-02

[\[pdf\] Datasheet](#)

datasheet Simpson 260 8PRT Analog Multimeter 6 Functions 12392 itm s cache |||

260-8 260-8P Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when The 260-8 features more attributes than its predecessors. Standard and high-energy fusing in conjunction with diode network meter...

lang:en score:18 filesize: 157.62 K page_count: 3 document date: 0000-00-00

[\[pdf\]](#) Accessories

SE Magnivue Sell Sheet v3 Product Literature Simpson Electric simpsonelectric 2021 10

Magnivue NEW FOR 2021 The NEW Magnivue A great add-on to compliment any Simpson 260 meter Simpson EI ... with pride MADE IN THE USA Made in the USA Order Part #50108 Magnivue Assembly - BLACK; 260-8; **260-8P** Order Part #50109 Magnivue Assembly - BLACK; 260-6XLM/XLPM; 260-8XI/XPI Simpson Electric ... lang:en **score:18** filesize: 488.57 K page_count: 1 document date: 2021-09-21

lang:en score:18 filesize: 488.57 K page_count: 1 document date: 2021-09-21

Simpson
MADE IN THE USA SINCE 1906 RELIABILITY BEYOND MEASURE

260-8® & 260-8P®
Analog VOM



- **36 Measurement Ranges:** Covers both AC and DC Voltage and Current measurement, as well as resistance testing
- **Connections Safeguarded:** Standard size reverse/recessed safety jack prevents damage to the test leads and ensures proper connections of the instrument
- **Overload Protection:** Dual current protectors indicate from overload damage (using 10A-SP and 260A-SPRT fuses)
- **Rugged Construction:** The Phenolic case is designed with heavy reinforced walls for maximum durability; set-shielding tact-band provides added shock resistance for the most demanding environments
- **Portable for the Workshop, Lab, or in the Field:** Portable enough to carry with accuracy checkup
- **Versatile:** Full-size test leads with threaded probe tips for screw-on alligator clips. Eliminate the need to change test leads while working
- **Simple Operation:** Two knobs control the selection of ranges and functions

Find Quality Products Online at: www.GlobalTestSupply.com sales@GlobalTestSupply.com

[pdf] Datasheet

datasheet Simpson 260 8RT Analog Electric Multimeter 20 Measurement Ranges 12389 globaltestsupply
s cache |||

260-8 **260-8P** Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when The 260-8 features more attributes than its predecessors. Standard and high-energy fusing in conjunction with diode network meter...

lang:en score:18 filesize: 146.71 K page_count: 3 document date: 0000-00-00

[pdf] Datasheet

ITM Datasheet Template datasheet Simpson 260 8 Analog VOM Meter 12388 calcert s cache |||

260-8 **260-8P** Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when The 260-8 features more attributes than its predecessors. Standard and high-energy fusing in conjunction with diode network meter...


lang:en score:18 filesize: 240.65 K page count: 3 document date: 2022-03-29

[pdf] Accessories

SE VOM Multimeters Sell Sheet Draft v3 Product Literature Simpson Electric simpsonelectric File III

VOM Multimeters Made in the USA Simpson Electric's line of VOM Multimeters combine performance and ... cked within a durable case. 160 Handi VOM Analog Multimeter 260-6XLM 260-6LPM Low Ohms 260-8 **260-8P** Analog 260-9 260-9SP Industrial Safety 270-5 270-5BT Extra High Accuracy 260-8xi 260

lang:en score:18 filesize: 497.31 K page_count: 1 document_date: 2021-01-14

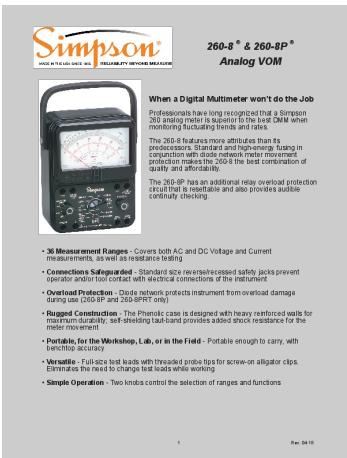

[pdf] Datasheet

Simpson 260 8 8P Analog VOM Galco Industrial Electronics Data Sheet Electric analongvom dat pim galco Manufacturer TechDocument |||

260-8 260-8P Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring fluctuating trends and rates. The 260-8 features more attributes than its predecessors. Standard and high-energy fusing in conjunction with diode network meter movement protection makes the 260-8 the best combination of quality and affordability.

The 260-8 has an additional relay overload protection circuit that is resettable and also provides audible continuity checking.

- **36 Measurement Ranges** - Covers both AC and DC Voltage and Current measurements, as well as resistance testing
- **Connections Safeguarded** - Standard size reversed/reversed safety jacks prevent operator and/or tool contact with electrical connections of the instrument
- **Overload Protection** - Diode network protects instrument from overload damage during use (260-8P and 260-8PRT only)
- **Rugged Construction** - The Phenolic case is designed with heavy reinforced walls for maximum durability. Self-shielding taub-band provides added shock resistance for the meter movement
- **Portable, for the Workshop, Lab, or in the Field** - Portable enough to carry, with benchtop accuracy
- **VERSATILE** - Full-size test leads with threaded probe tips for screw-on alligator clips. Eliminates the need to change test leads while working
- **Simple Operation** - Two knobs control the selection of ranges and functions



[pdf] Datasheet

A9RE789 tmp Simpson 260 8 8P Analog VOM Electric Company DatasheetSimpson VOM2608cdn shopify s files 1 0020 5753 5546 2608 14023697681440546979 |||

260-8 260-8P Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when The 260-8 features more attributes than its predecessors. Standard and high-energy fusing in conjunction with diode network meter...

lang:en score:18 filesize: 456.52 K page_count: 3 document date: 2018-05-07




[pdf] Datasheet

A9RE789 tmp Simpson 260 8 8P Analog VOM Electric Company Mouser When a Digital Multimeter won't do the Job Professionals have long recognized that analog meter is superior to best DMM when 2608 2064409 mouser tw datasheet 2 370 |||

260-8 260-8P Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when The 260-8 features more attributes than its predecessors. Standard and high-energy fusing in conjunction with diode network meter...

lang:en score:18 filesize: 148.42 K page_count: 4 document date: 2017-06-12


[pdf] Specifications Catalog

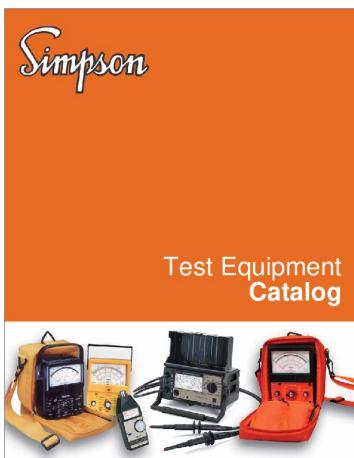

Simpson Test Equipment Catalog Electric Company Marshall Wolf Automation0 200K 20M DC CURRENT Specifications Continued AC VOLTAGE *Accuracies and voltage jacks for recorder analyzer tester Interfacesimpson testequipment catalogwolfautomation content simpson catalog srlsitid AfmBOooq30 HiU1r8MWqZw90WHqHswYyTghdzlhZwmcVToYJtK8TrbtE catalogsimpson HiU1r8MWqZw90WHqHswYyTghdzlhZwmcVToYJtK8TrbtEwolfautomation AfmBOoqO9YTe37XePauVKJeUQrGL MLuQSuvvSTI3SxXySKOGPS8G4iO AfmBOop04KYVQdKhhOpZpTKu BoeNFlw01fWohMdFWANM22D5twORG4uwolfautomation MLuQSuvvSTI3SxXySKOGPS8G4iOwolfautomation AfmBOooRR avBFbGFJuaGpqegjl6eUpKSlxnk5Mdl JIDSidAO2mikbm |||

Test Equipment Catalog No One Beats Simpson on Quality When asked why they buy Simpson Products, ... SP Industrial Safety VOM
.....3 260-8 **260-8P** Analog VOM
.....


lang:en score:17 filesize: 4.7 M page_count: 29 document date: 2013-07-02

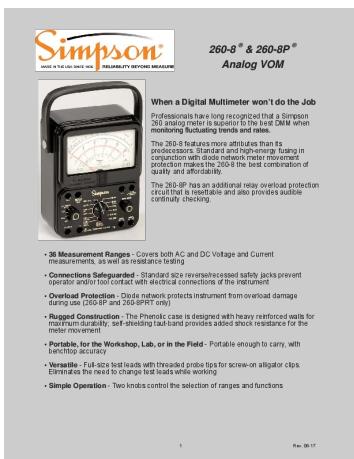

[pdf] Datasheet

A9RE789 tmp Simpson 260 8 8P Analog VOM Electric Company Data Sheets 2608 simpsonelectric File datasheets Datasheet eTesters Product Home Contact Sales Distributors Reps |||

260-8 260-8P Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when The 260-8 features more attributes than its predecessors. Standard and high-energy fusing in conjunction with diode network meter...
lang:en score:17 filesize: 144.58 K page_count: 3 document date: 2017-06-12

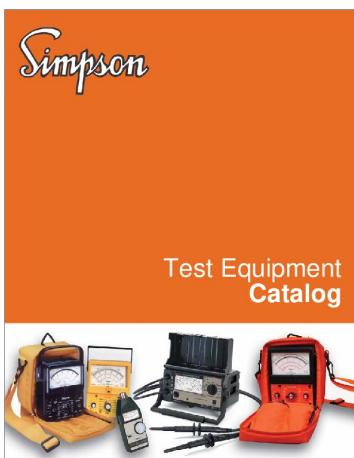

[pdf] Datasheet Catalog

Simpson Test Equipment Catalog Electric Company 40000 datasheet by SnapMagic Search ALC s3 amazonaws snapeda S H Industries |||

Test Equipment Catalog No One Beats Simpson on Quality When asked why they buy Simpson Products, ... SP Industrial Safety VOM
.....3 260-8 **260-8P** Analog VOM
.....

lang:en score:17 filesize: 4.72 M page_count: 30 document date: 2013-07-02

260-8® & 260-8P® Analog VOM

When a Digital Multimeter won't do the Job

Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when measuring AC voltage, DC voltage, and DC current.

The 260-8 features numerous advantages that its predecessors, standard and high-accuracy, fail to compare with. The combination of analog protection and digital readout makes the 260-8 the best combination of safety and accuracy.

The 260-8P has an additional relay overload protection circuitry to protect the meter and also provides audible continuity checking.

260-8

- **30 Measurements** - Includes - Covers both AC and DC Voltage and Current measurements, as well as resistance testing.

- **Connections & Safeguards** - Standard size screw-terminal safety jacks prevent operator and tool contact with electrical connections of the instrument.

- **Overload Protection** - Dual network protects instrument from overload damage during AC voltage, DC current, and resistance measurements.

- **Rugged Construction** - The Phoenix case is designed with heavy reinforced walls for maximum durability, self-shredding tool-belt provides added shock resistance for the meter.

- **Portable**, for the Workshop, Lab, or in the field - designed to be easy to carry, with belt-loop accuracy.

- **Versatile** - Full-size test leads with threaded probe tips for screw-on alligator clips. Eliminates the need to change test leads while working.

- **Simple Operation** - Two knobs control the selection of ranges and functions.

1

Rev. 10-22

[\[pdf\]](#) Datasheet

A9RE789 tmp Simpson 260 8 8P Analog VOM Electric Company ® 31 ott 2022 — The features more attributes than its predecessors Standard and high energy fusing in conjunction with diode network meter movement AND DATASHEET simpsonelectric 10 |||

260-8 **260-8P** Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when The 260-8 features more attributes than its predecessors. Standard and high-energy fusing in conjunction with diode network meter...

lang:en score:17 filesize: 7.73 M page_count: 3 document_date: 2022-10-05

 Test Leads Equipment Accessories																																																									
Test Probes / Cables / Clips																																																									
<p>The quality of Simpson test probes and clips are proven worldwide. See individual models for full listing.</p>																																																									
<table border="1"> <thead> <tr> <th></th> <th>TEST PROBES AND CLIPS</th> <th>Flame Test Probes</th> <th>Flame Test Probes</th> <th>Flame Test Probes</th> <th>Flame Test Probes</th> <th>Flame Test Probes</th> </tr> </thead> <tbody> <tr> <td>Reactive Probes</td> <td>  2387 2387-Y 2387-Y 2387-Y 2395 </td> <td>8880 (Infrared probe probe probe (+,-)</td> <td>+</td> <td>+</td> <td>+</td> <td>+</td> </tr> <tr> <td>Standard Probes</td> <td>  2388 2388-L 2388-L 2388-L 2392 </td> <td>8810 (Infrared probe probe probe (+,-)</td> <td>+</td> <td>8888 8888-L (Infrared probe (+,-)</td> <td>+</td> <td>8810 8810-L (Infrared probe (+,-)</td> </tr> <tr> <td>Gold Probes</td> <td>  163 </td> <td>8880 (+,-)</td> <td>+</td> <td>8880 (Infrared probe (+,-)</td> <td>+</td> <td>8880 (Infrared probe (+,-)</td> </tr> <tr> <td>Standard Spiral Clip</td> <td>  7811/12 </td> <td>+</td> <td>+</td> <td>+</td> <td>+</td> <td>8880 (+,-)</td> </tr> <tr> <td>Standard Spiral Clip Flag</td> <td>  7810 </td> <td>+</td> <td>+</td> <td>+</td> <td>+</td> <td>8880 (+,-)</td> </tr> <tr> <td>Reinforced Spiral Clip</td> <td>  23881 (Infrared probe probe probe (+,-)</td> <td>8888 (Infrared probe probe probe (+,-)</td> <td>+</td> <td>8888 (Infrared probe probe probe (+,-)</td> <td>+</td> <td>8888 (Infrared probe probe probe (+,-)</td> </tr> <tr> <td>Standard Spiral Clip</td> <td>  8372 8372 </td> <td>8810 (Infrared probe probe probe (+,-)</td> <td>+</td> <td>8888 (Infrared probe probe probe (+,-)</td> <td>+</td> <td>8888 (Infrared probe probe probe (+,-)</td> </tr> </tbody> </table>			TEST PROBES AND CLIPS	Flame Test Probes	Flame Test Probes	Flame Test Probes	Flame Test Probes	Flame Test Probes	Reactive Probes	 2387 2387-Y 2387-Y 2387-Y 2395	8880 (Infrared probe probe probe (+,-)	+	+	+	+	Standard Probes	 2388 2388-L 2388-L 2388-L 2392	8810 (Infrared probe probe probe (+,-)	+	8888 8888-L (Infrared probe (+,-)	+	8810 8810-L (Infrared probe (+,-)	Gold Probes	 163	8880 (+,-)	+	8880 (Infrared probe (+,-)	+	8880 (Infrared probe (+,-)	Standard Spiral Clip	 7811/12	+	+	+	+	8880 (+,-)	Standard Spiral Clip Flag	 7810	+	+	+	+	8880 (+,-)	Reinforced Spiral Clip	 23881 (Infrared probe probe probe (+,-)	8888 (Infrared probe probe probe (+,-)	+	8888 (Infrared probe probe probe (+,-)	+	8888 (Infrared probe probe probe (+,-)	Standard Spiral Clip	 8372 8372	8810 (Infrared probe probe probe (+,-)	+	8888 (Infrared probe probe probe (+,-)	+	8888 (Infrared probe probe probe (+,-)
	TEST PROBES AND CLIPS	Flame Test Probes	Flame Test Probes	Flame Test Probes	Flame Test Probes	Flame Test Probes																																																			
Reactive Probes	 2387 2387-Y 2387-Y 2387-Y 2395	8880 (Infrared probe probe probe (+,-)	+	+	+	+																																																			
Standard Probes	 2388 2388-L 2388-L 2388-L 2392	8810 (Infrared probe probe probe (+,-)	+	8888 8888-L (Infrared probe (+,-)	+	8810 8810-L (Infrared probe (+,-)																																																			
Gold Probes	 163	8880 (+,-)	+	8880 (Infrared probe (+,-)	+	8880 (Infrared probe (+,-)																																																			
Standard Spiral Clip	 7811/12	+	+	+	+	8880 (+,-)																																																			
Standard Spiral Clip Flag	 7810	+	+	+	+	8880 (+,-)																																																			
Reinforced Spiral Clip	 23881 (Infrared probe probe probe (+,-)	8888 (Infrared probe probe probe (+,-)	+	8888 (Infrared probe probe probe (+,-)	+	8888 (Infrared probe probe probe (+,-)																																																			
Standard Spiral Clip	 8372 8372	8810 (Infrared probe probe probe (+,-)	+	8888 (Infrared probe probe probe (+,-)	+	8888 (Infrared probe probe probe (+,-)																																																			
<p>1 x 1 Solid 14 AWG wire</p>																																																									

[pdf] Datasheet Accessories

Simpson Test Leads Data Sheet assets tequipment net 1 26 ||

Test Leads Equipment Accessories Test Probes / Cables / Clips The quality of Simpson test probes and clips are proven worldwide. See individual models for full listings. TEST PROBES AND CLIPS Reverse Insulated FOR MODEL 260-7 260-7P 260-8 260-8P 270-5 Standard Banana 260-8Xi 260-6XLM 260-6XLPM ...

lang:en score:17 filesize: 766.72 K page_count: 2 document_date: 2016-04-14

[pdf] Datasheet Accessories

datasheet Simpson 45001 Test Leads for 8455 6 a globaltestsupply s cache |||

Test Leads Equipment Accessories Test Probes / Cables / Clips The quality of Simpson test probes and clips are proven worldwide. See individual models for full listings. TEST PROBES AND CLIPS Reverse Insulated FOR MODEL 260-7 260-7P 260-8 **260-8P** 270-5 Standard Banana 260-8Xi 260-6XLM 260-6XLPM ...

lang:en score:17 filesize: 94.08 K page count: 2 document date: 0000-00-00

[pdf] Datasheet Accessories

datasheet Simpson 45001 Test Leads for 8455 6 a itm s cache |||

Test Leads Equipment Accessories Test Probes / Cables / Clips The quality of Simpson test probes and clips are proven worldwide. See individual models for full listings. TEST PROBES AND CLIPS Reverse Insulated FOR MODEL 260-7 260-7P 260-8 **260-8P** 270-5 Standard Banana 260-8Xi 260-6XLM 260-6XLPM ...
Lang:en score:17 filesize:104.71 K page_count:2 document_date:0000.00.00

lang:en score:17 filesize: 104.71K page_count: 2 document date: 0000-00-00

 Test Probes / Cables / Clips		Test Leads Equipment Accessories					
<p>The quality of Simpson test probes and clips are proven worldwide. See individual models for full listing.</p>							
TEST PROBES AND CLIPS		POLESTAR	POLESTAR PRO	POLESTAR PRO PROBE	POLESTAR PRO PROBE ADAPTER	POLESTAR PRO PROBE ADAPTER CABLE	POLESTAR PRO PROBE ADAPTER CABLE
Banana Probe		100	1000	+	+	+	+
		2000	2000	+	+	+	+
Banana Probe		100	1000	+	+	+	+
		2000	2000	+	+	+	+
Banana Probe		100	1000	(-)	+	1000 (Optical)	+
		2000	2000	(-)	+	1000 (Optical)	+
Banana Probe		100	1000	(-)	+	1000 (Optical)	+
		2000	2000	(-)	+	1000 (Optical)	+
Banana Probe		100	1000	(-)	+	1000 (Optical)	+
		2000	2000	(-)	+	1000 (Optical)	+
Banana Probe		100	1000	(-)	+	1000 (Optical)	+
		2000	2000	(-)	+	1000 (Optical)	+
Banana Probe		100	1000	(-)	+	1000 (Optical)	+
		2000	2000	(-)	+	1000 (Optical)	+
Banana Probe		100	1000	(-)	+	1000 (Optical)	+
		2000	2000	(-)	+	1000 (Optical)	+
<p>(-) Solid with probe (-) Solid with clip</p>							

[pdf] Datasheet Accessories

ITM Datasheet Template datasheet Simpson 45001 Test Leads for 8455 6 a calcert s cache |||

Test Leads Equipment Accessories Test Probes / Cables / Clips The quality of Simpson test probes and clips are proven worldwide. See individual models for full listings. TEST PROBES AND CLIPS Reverse Insulated FOR MODEL 260-7 260-7 260-8 **260-8P** 270-5 Standard Banana 260-8Xi 260-6XLM 260-6XLPM ...

lang:en score:17 filesize: 186.72 K page_count: 2 document date: 2022-03-29

 Test Probes / Cables / Clips	 Test Leads
SIMPSON TEST EQUIPMENT MANUFACTURERS	
Equipment Accessories	
Test Probes / Cables / Clips	Test Leads
<p>The quality of Simpson test probes and clips are proven worldwide. See individual models for full listing.</p>	
 TEST PROBES FOR VOLTS	 TEST LEADS
 3000V AC/DC	 3000V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
 2500V AC/DC	 2500V AC/DC
<img alt="Test Probes 2500V AC/DC logo" data-b	

[pdf] Datasheet Accessories


Test Leads Equipment Accessories This Kelvin probe set consists of RG 174 cable with a BNC connector on one end and the other Spring contacts are simpson testleads equipaccessory datasheet wolfautomation media accessories |||

Test Leads Equipment Accessories Test Probes / Cables / Clips The quality of Simpson test probes and clips are proven worldwide. See individual models for full listings. TEST PROBES AND CLIPS Reverse Insulated FOR MODEL 260-7 260-7P 260-8 **260-8P** 270-5 Standard Banana 260-8Xi 260-6XLM 260-6XLPM ...


lang:en score:16 filesize: 756.54 K page_count: 2 document date: 2018-11-01

반도체 · 電子의 모든 것 아이씨뱅크(주)
Mouser Electronics, Inc의 한국 공식파트너입니다.

이제 ICbank에서 직접 편리하게 구매하실 수 있습니다.



www.icbank.com
Mouser 전화 : 070 019 3999

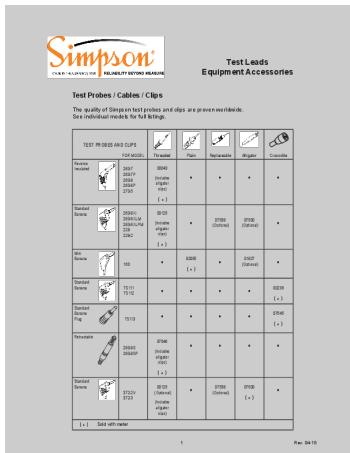

[pdf] User Manual Guide

EMBEDDEDSECTIONGUIDE Embedded Solutions Mouser Electronics Inc BK Precision VSP4030 User manual 7395034 archive org manualzilla id


TEST MEASUREMENT BACK NEXT Panel Meters Datel / Murata Power Solutions Simpson Part No. Fig. Description 529-12388 12388 A 260-8 General Purpose 529-12391 12391 A **260-8P** Relay Protected 529-12389 12389 A 260-8RT Roll-Top Case 529-12392 12392 A **260-8PRT** Relay P...

lang:de score:15 filesize: 8.91 M page_count: 42 document date: 2009-11-12

[pdf] Datasheet Accessories

Datasheet Test Leads Simpson Electric testleads simpsonelectric File datasheets Probes Cables Clips banana plug test probes find new products every month and feel confident with our low Price guarantee was \$14.99 Grabber to Banana Plug element14 Australia TL 5A Multimeter Probe 4mm 20A Mono AST Labs |||

Test Leads Equipment Accessories Test Probes / Cables / Clips The quality of Simpson test probes and clips are proven worldwide. See individual models for full listings. TEST PROBES AND CLIPS Reverse Insulated FOR MODEL 260-7 260-7P 260-8 **260-8P** 270-5 Standard Banana 260-8Xi 260-6XLM 260-6XLPM ...
lang:en score:15 filesize: 768.62 K page_count: 2 document date: 2015-04-27

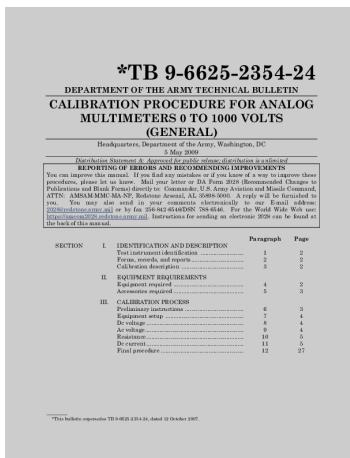

[pdf] Instructions Technical Bulletin

TB 9 6625 2354 24 liberatedmanuals


*TB 9-6625-2354-24 DEPARTMENT OF THE ARMY TECHNICAL BULLETIN
CALIBRATION PROCEDURE FOR ANALOG MULTIM ... 260-6P 7 2 260-6XLP 8 3 260-6XLPM 9 3 260-7 10 2 260-7M 11 2 260-7P 12 2 260-8 **260-8P** 13 4 270-4 14 5 SECTION II EQUIPMENT REQUIREMENTS 4. Equipment Required. Table 2 ident...
lang:en score:13 filesize: 238.32 K page_count: 35 document date: 2011-02-09



Fluke Handheld Test Equipment Catalog: Oscilloscopes and Multimeters

Explore a comprehensive range of Fluke handheld oscilloscopes and digital multimeters, including Scopemeters, industrial multimeters, and specialized test equipment. Find detailed specifications, accessories, and combo kits for various electrical and electronic testing needs.

lang:en score:13 filesize: 5.42 M page_count: 44 document date: 2009-09-22

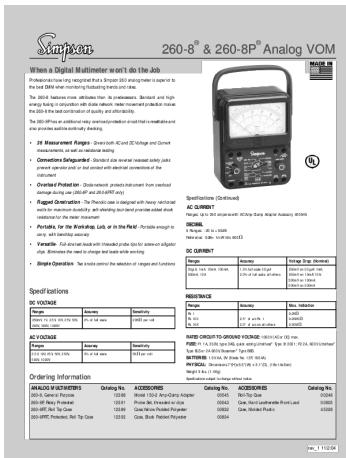

[pdf] Datasheet

junk qxd 20006 06 07datasheet pim resources coleparmer data sheet

260-8 260-8P Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring fluctuating trends and rates. The 260-8 features more attributes than its predecessors. Standard and high energy fusing ...

lang:en score:13 filesize: 29.94 K page_count: 1 document date: 2004-11-02



[pdf]

VR40646 literature puertoricosupplier 041 |||

260-8 260-8P Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitoring fluctuating trends and rates. The 260-8 features more attributes than its predecessors. Standard and high energy fusing ...

lang:en score:13 filesize: 29.18 K page_count: 1 document date: 2010-03-30

[\[pdf\]](#) Catalog

2608 transcat 80 catalog s

260 - 8 260 - 8P Analog VOM When a digital multimeter won't do. Professionals have long recognized ... that meter movement protection makes the 260-8 the best combination of quality and affordability. The **260-8P** has an additional relay overload protection circuit that is resettable and also provides audi...

lang:en score:13 filesize: 37.61 K page_count: 1 document date: 2003-06-17

 RSR ELECTRONICS, INC.		800 Hart Street Walney, NJ 07665, U.S.A. http://www.electroline.com electroline@walleye.com																	
<hr/>																			
Part Nos. 01260-8 and 01260-8P																			
																			
260-8 & 260-BP Analog VOM																			
When a Digital Multimeter won't do the job																			
Professional grade analog VOMs for DMM testing in a ruggedized, compact, handheld design.																			
The 260-8 features many advanced features: • True RMS AC Voltage: Measures true RMS AC voltage for highly accurate AC voltage measurements on all voltage ranges.																			
• True RMS AC Current: Measures true RMS AC current on 0.1A, 1A, and 10A ranges.																			
• 20 Measurement Ranges: Measures AC and DC voltage and current on all ranges using a single switch.																			
• Commutation Separated: Measures DC voltage and current using just one probe connection. Measures AC voltage and current using two probe connections.																			
• Overvoltage Protection: Measures AC voltage from 0 to 600VAC without damage to the probe or meter.																			
• Rugged Construction: The 260-8 has a ruggedized, compact, handheld design with a built-in carrying handle and a carrying case.																			
• Portable and Precise: The 260-8 is a portable, handheld VOM with a high resolution digital display and a large, easy-to-read LCD.																			
• Variable Input Impedance: Full-scale input impedance for the best possible accuracy and resolution.																			
• Stable Operation: The 260-8 maintains the selection of ranges and functions																			
Special Features																			
8 VOLTMETERS																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-100V AC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1000V AC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-300V DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1000V DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-100V AC	±3%	3 1/2 digit	0-1000V AC	±3%	3 1/2 digit	0-300V DC	±3%	3 1/2 digit	0-1000V DC	±3%	3 1/2 digit	
Range	Accuracy	Display																	
0-100V AC	±3%	3 1/2 digit																	
0-1000V AC	±3%	3 1/2 digit																	
0-300V DC	±3%	3 1/2 digit																	
0-1000V DC	±3%	3 1/2 digit																	
AC VOLTMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-100V AC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1000V AC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-100V AC	±3%	3 1/2 digit	0-1000V AC	±3%	3 1/2 digit							
Range	Accuracy	Display																	
0-100V AC	±3%	3 1/2 digit																	
0-1000V AC	±3%	3 1/2 digit																	
AC CURRENT																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> <th>Input Impedance (Ammeter)</th> </tr> </thead> <tbody> <tr> <td>0-10A AC</td> <td>±3%</td> <td>3 1/2 digit</td> <td>100Ω</td> </tr> <tr> <td>0-1A AC</td> <td>±3%</td> <td>3 1/2 digit</td> <td>10Ω</td> </tr> <tr> <td>0-0.1A AC</td> <td>±3%</td> <td>3 1/2 digit</td> <td>1Ω</td> </tr> </tbody> </table>				Range	Accuracy	Display	Input Impedance (Ammeter)	0-10A AC	±3%	3 1/2 digit	100Ω	0-1A AC	±3%	3 1/2 digit	10Ω	0-0.1A AC	±3%	3 1/2 digit	1Ω
Range	Accuracy	Display	Input Impedance (Ammeter)																
0-10A AC	±3%	3 1/2 digit	100Ω																
0-1A AC	±3%	3 1/2 digit	10Ω																
0-0.1A AC	±3%	3 1/2 digit	1Ω																
DC CURRENT																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> <th>Input Impedance (Ammeter)</th> </tr> </thead> <tbody> <tr> <td>0-10A DC</td> <td>±3%</td> <td>3 1/2 digit</td> <td>100Ω</td> </tr> <tr> <td>0-1A DC</td> <td>±3%</td> <td>3 1/2 digit</td> <td>10Ω</td> </tr> <tr> <td>0-0.1A DC</td> <td>±3%</td> <td>3 1/2 digit</td> <td>1Ω</td> </tr> </tbody> </table>				Range	Accuracy	Display	Input Impedance (Ammeter)	0-10A DC	±3%	3 1/2 digit	100Ω	0-1A DC	±3%	3 1/2 digit	10Ω	0-0.1A DC	±3%	3 1/2 digit	1Ω
Range	Accuracy	Display	Input Impedance (Ammeter)																
0-10A DC	±3%	3 1/2 digit	100Ω																
0-1A DC	±3%	3 1/2 digit	10Ω																
0-0.1A DC	±3%	3 1/2 digit	1Ω																
RESISTANCE																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> <th>Max. Voltage</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> <td>10V</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> <td>1V</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> <td>1V</td> </tr> </tbody> </table>				Range	Accuracy	Display	Max. Voltage	0-10MΩ	±3%	3 1/2 digit	10V	0-1MΩ	±3%	3 1/2 digit	1V	0-100KΩ	±3%	3 1/2 digit	1V
Range	Accuracy	Display	Max. Voltage																
0-10MΩ	±3%	3 1/2 digit	10V																
0-1MΩ	±3%	3 1/2 digit	1V																
0-100KΩ	±3%	3 1/2 digit	1V																
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-100V AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1000V AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-100V AC/DC	±3%	3 1/2 digit	0-1000V AC/DC	±3%	3 1/2 digit							
Range	Accuracy	Display																	
0-100V AC/DC	±3%	3 1/2 digit																	
0-1000V AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-0.1A AC/DC</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10A AC/DC	±3%	3 1/2 digit	0-1A AC/DC	±3%	3 1/2 digit	0-0.1A AC/DC	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10A AC/DC	±3%	3 1/2 digit																	
0-1A AC/DC	±3%	3 1/2 digit																	
0-0.1A AC/DC	±3%	3 1/2 digit																	
AC/DC VOLT-AMMETER																			
<table border="1"> <thead> <tr> <th>Range</th> <th>Accuracy</th> <th>Display</th> </tr> </thead> <tbody> <tr> <td>0-10MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-1MΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> <tr> <td>0-100KΩ</td> <td>±3%</td> <td>3 1/2 digit</td> </tr> </tbody> </table>				Range	Accuracy	Display	0-10MΩ	±3%	3 1/2 digit	0-1MΩ	±3%	3 1/2 digit	0-100KΩ	±3%	3 1/2 digit				
Range	Accuracy	Display																	
0-10MΩ	±3%	3 1/2 digit																	
0-1MΩ	±3%	3 1/2 digit																	
0-100KΩ	±3%	3 1/2 digit																	

[\[pdf\]](#) Datasheet

Datasheet Analog Meter High Quality 27 Ranges Electronix Express 01260 8cdn shopify s files 1 0268

7746 0673 01260 8 v 1625850690 ||

900 Hart Street Rahway, NJ 07065, U.S.A. <http://www.elexp.com> email: electron@elexp.com Part Nos. 01260-8 and **01260-8P** 260-8 **260-8P** Analog VOM When a Digital Multimeter won't do the Job Professionals have long recognized that a Simpson 260 analog meter is superior to the best DMM when monitor...

lang:en score:13 filesize: 136.44 K page_count: 1 document date: 2012-10-09