Manuals+

AKS AURA FC4076 Mounting Bracket Lamp Instructions
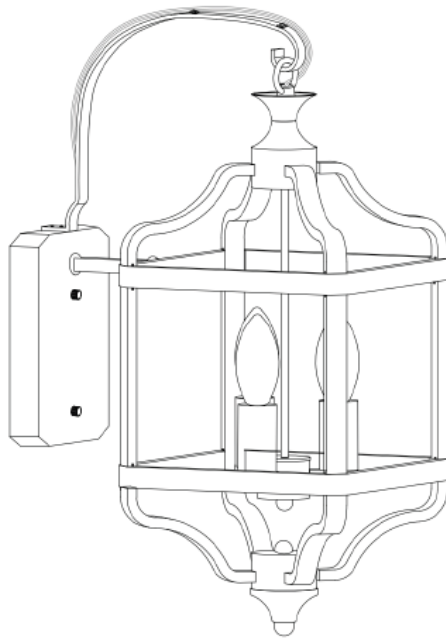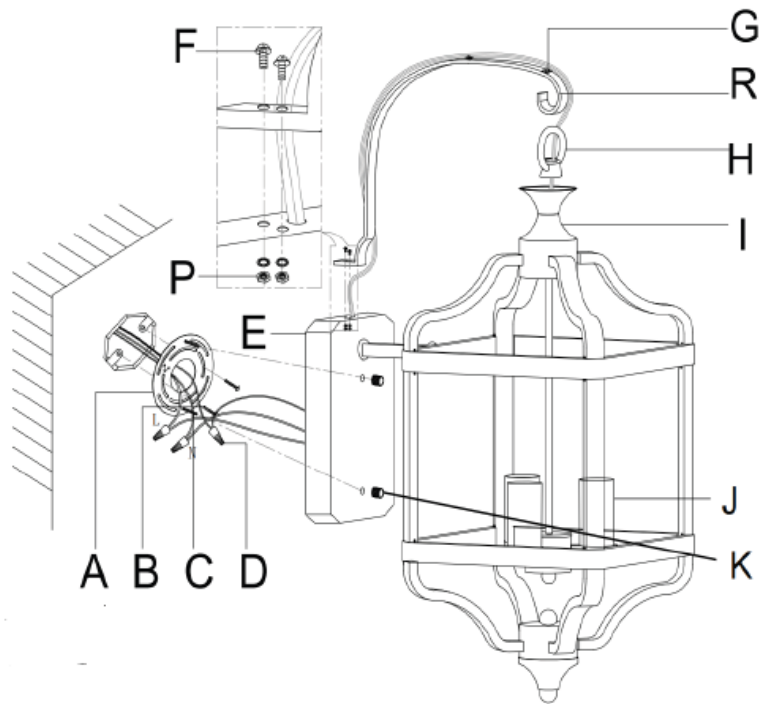
May 28, 2025

Contents [hide]

AKS AURA FC4076 Mounting Bracket Lamp

Instructions

- A. Mounting Bracket
- B. Tapping Screws
- C. Bracket Screws
- D. Wiring Cap
- E. Canopy
- F. Tapping Screws
- G. Lamp Arm
- H. Hanging Loop
- I. Lamp Body
- J. Lamp Holder
- K. Knurled Nut
- P. Hexagonal Nuts
- R. Fixed Clip

PLEASE READ INSTRUCTIONS IN THEIR ENTIRETY PRIOR TO ASSEMBLY AND INSTALLATION

SAFETY PRECAUTIONS:

- Please carefully examine the cord, lamp holder, switch,and all other parts foe damages. If any damage or defect is found,please return this fixture.
- This fixture use E12 Medium Bulbs Max. 40W. To avoid the risk of fire, do not use bulbs that exceed the 40W limit.We suggest using LED Bulbs for lower energy consumption and longer life span.
- Installing this fixture reguies connecting electrics wires.These connections must be in accordance with National Electrical Code(NEC)standards, we suggest hiring a licensed electrician to do this.
- Recommended for indoor use only, please keep this fixture away from water or moisture.
- Wipe clean using a soft, dry cloth or static duster. Always avoid the use of harsh chemicals and abrasives to clean fixtures as they may damage the finish.
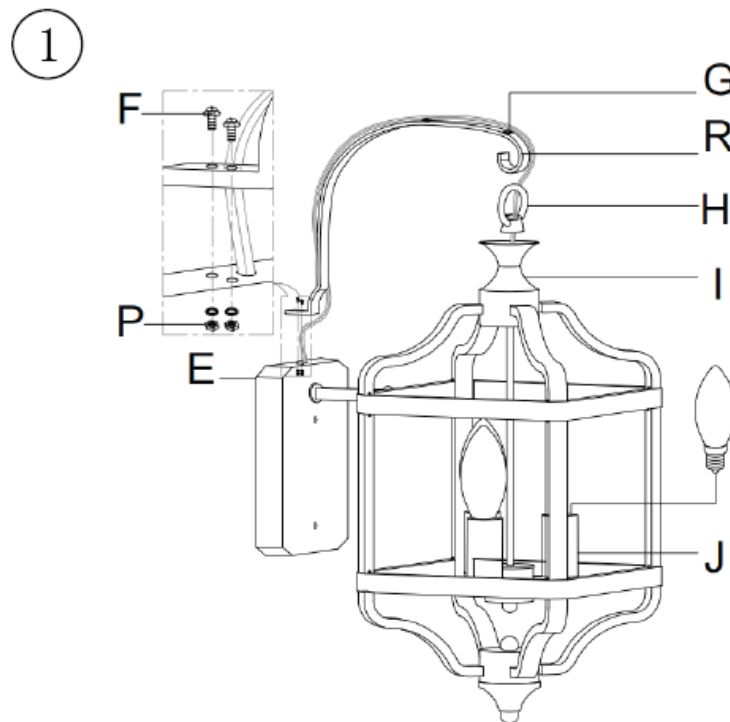
ASSEMBLY & INSTALLATION GUIDEITEMS YOU NEED

- Ladder

- Screw driver.
- Wire cutter/stripper.
- insulation tape.
- 3 x E12 Bulb(<40W)

GETTING STARTED

1. Carefully unpack all accessories and parts.
2. Place all components on a clean, flat and soft surface to prevent parts from getting scratched.
3. Shut off your main electrical supply at the fuse box or circuit breaker. Just turning off the light switch is not sufficient to prevent electrical shock!
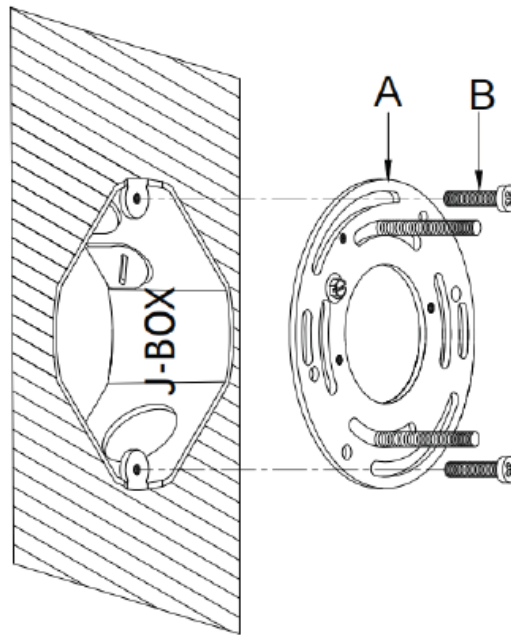

1. Step 1.
    1. Place the Hanging Loop(H) on the Lamp Body(I) and tighten it securely. Hang the Hanging Loop(H) on the Lamp Arm(G).
    2. Use the Tapping Screws(F) to secure the Lam pArm(G) onto the Canopy(E) with the Hexagonal Nuts(P).
    3. Install the light bulb in the Lamp Holder(J) in sequence.
    4. Insert the wires into the Fixed Clip(R) and thread them through the hole in the Canopy(E).
2. Step 2 .

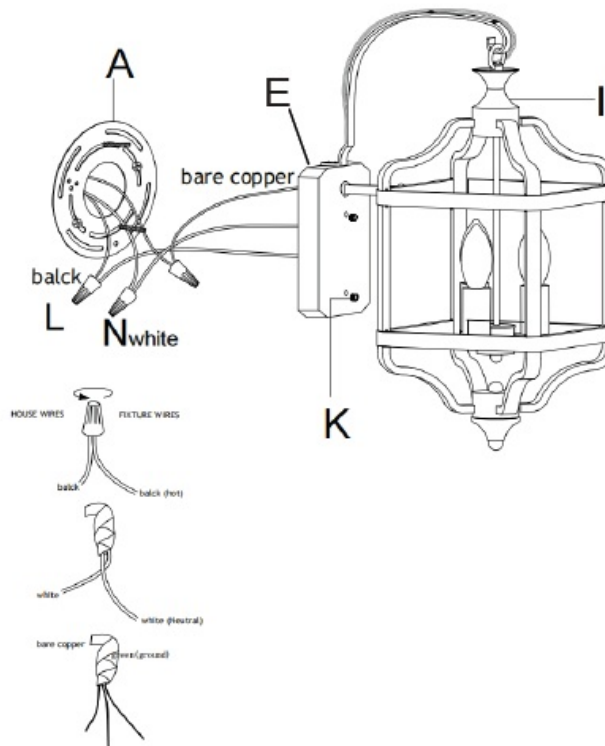Secure Mounting Bracket(A) to ceiling junction box by Tapping Screws(B).

②

3. Step 3.
    1. Connect black fixture wire to black supply wire and white fixture wire to white supply wire using wire caps(provided).Warp connection with electrical tape.
    2. Connect ground wire from canopy with ground wire from Junction box using a wire cap. Wrap with electrical tape for a more secure connection. If house does not have ground wire, attach grounding wire to green grounding screw marked GND.
    3. Tuck all wires carefully into the J-Box.
    4. Secure the Canopy(E) to the Mounting Bracket(A) using Tapping Screws(K).

WARNING

Never connect grounding wire to black or white power supply wires. It is imperative that the outlet box in your home be properly grounded.

Oaks Aura https://www.OaksAura.com

Documents / Resources

	AKS AURA FC4076 Mounting Bracket Lamp [pdf] Instructions 22, 19ff2952-25e0-4232-ad75-330df12b088a, FC4076 Mounting Bracket Lamp, FC4076, Mounting Bracket Lamp, Bracket Lamp, Lamp

References

- User Manual

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

Manuals+ | Upload | Deep Search | Privacy Policy | @manuals.plus | YouTube