

Soundmaster UR8400

Soundmaster UR8400 Alarm Clock Radio User Manual

Model: UR8400

1. INTRODUCTION

Thank you for purchasing the Soundmaster UR8400 Alarm Clock Radio. This device combines a digital clock with a clear 1.8-inch LED display, an FM radio, and dual alarm functions, making it an ideal companion for your bedside table. This manual provides detailed instructions for setup, operation, and maintenance to ensure optimal performance and longevity of your device.

2. SAFETY INFORMATION

Please read these safety instructions carefully before using the device and keep them for future reference. Incorrect use may result in electric shock or fire.

- **Power Source:** Only use the provided external AC adapter. Ensure the voltage (AC 230V, 50 Hz) matches your local power supply.
- **Water and Moisture:** Do not expose the device to rain, moisture, or dripping or splashing liquids. Do not place objects filled with liquids, such as vases, on the device.
- **Ventilation:** Ensure adequate ventilation. Do not block any ventilation openings.
- **Heat:** Keep the device away from heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- **Cleaning:** Unplug the device from the power outlet before cleaning. Use a soft, dry cloth. Do not use liquid cleaners or aerosol cleaners.
- **Servicing:** Do not attempt to service this product yourself. Refer all servicing to qualified service personnel.
- **Backup Battery:** The device requires 1 Lithium-ion battery for backup (not included). Ensure correct polarity when inserting.

3. PACKAGE CONTENTS

Please check that all items are present and in good condition:

- Soundmaster UR8400 Alarm Clock Radio
- External AC Power Adapter
- User Manual (this document)

4. PRODUCT OVERVIEW

Familiarize yourself with the main components and controls of your Soundmaster UR8400.

Front View



Image 1: Front view of the Soundmaster UR8400, displaying the time 17:17 on its large 1.8-inch white LED screen. The 'soundmaster highLine' logo is visible at the top center of the display.



Image 2: Front view of the Soundmaster UR8400, displaying the radio frequency 100.6 MHz on its large 1.8-inch white LED screen, indicating it is in radio mode.

Side View (Controls)



Image 3: Side view of the Soundmaster UR8400, highlighting the silver-colored top edge with various control buttons. These buttons are used for setting time, alarms, radio tuning, and adjusting volume.

The device features a prominent 1.8-inch LED display for time and radio frequency. Control buttons are located on the top edge of the unit for easy access.

5. SETUP

5.1 Power Connection

1. Unpack the Soundmaster UR8400 and its AC power adapter.
2. Connect the small end of the AC power adapter to the DC IN jack on the back of the alarm clock radio.
3. Plug the other end of the AC power adapter into a standard AC 230V, 50 Hz wall outlet. The display will light up.

5.2 Installing Backup Battery (Optional)

The UR8400 requires 1 Lithium-ion battery (not included) for backup power. This battery preserves time and alarm settings during a power outage.

1. Locate the battery compartment on the bottom of the unit.
2. Open the battery compartment cover.
3. Insert 1 Lithium-ion battery, ensuring the correct polarity (+ and -) as indicated inside the compartment.
4. Close the battery compartment cover securely.

6. OPERATING INSTRUCTIONS

6.1 Setting the Time

1. Press and hold the 'TIME SET' button (location on top edge, refer to Image 3) until the hour digits begin to flash.
2. Use the 'HOUR' and 'MINUTE' buttons to adjust the hour and minute respectively.
3. Press 'TIME SET' again to confirm and exit time setting mode.

6.2 Setting the Alarm (Dual Alarms)

The UR8400 features two independent alarms (Alarm 1 and Alarm 2).

1. Press and hold the 'ALARM 1 SET' or 'ALARM 2 SET' button until the alarm hour digits flash.
2. Use the 'HOUR' and 'MINUTE' buttons to set the desired alarm time.
3. Press the 'ALARM 1 SET' or 'ALARM 2 SET' button again to select the alarm source (Radio or Buzzer). The display will show 'rAd' for radio or 'bUz' for buzzer.
4. Press the 'ALARM 1 SET' or 'ALARM 2 SET' button one more time to confirm and activate the alarm. An alarm icon will appear on the display.
5. To deactivate an alarm, repeatedly press the corresponding 'ALARM SET' button until the alarm icon disappears.

6.3 Weekend Function

The weekend function allows you to disable the alarm for Saturday and Sunday automatically.

1. While in normal time display mode, press the 'WEEKEND' button.
2. A 'WEEKEND' indicator will appear on the display, signifying that alarms will be skipped on weekends.
3. Press the 'WEEKEND' button again to deactivate the function.

6.4 Radio Operation (FM-PLL)

1. Press the 'RADIO' button to turn on the FM radio. The display will show the current frequency.
2. **Automatic Scan:** Press and hold the 'TUNE+' or 'TUNE-' button to automatically scan for the next available station.
3. **Manual Tuning:** Briefly press the 'TUNE+' or 'TUNE-' button to manually adjust the frequency step by step.
4. **Setting Presets (10 Stations):**
 - a. Tune to your desired station.
 - b. Press and hold the 'MEM' (Memory) button until 'P01' (or the next available preset number) flashes on the display.
 - c. Use the 'PRESET+' or 'PRESET-' buttons to select the desired preset number (P01-P10).
 - d. Press 'MEM' again to confirm and save the station to the selected preset.
5. **Recalling Presets:** Briefly press the 'PRESET+' or 'PRESET-' buttons to cycle through your saved stations.
6. **Volume Adjustment:** Use the 'VOL+' and 'VOL-' buttons to adjust the radio volume.
7. Press the 'RADIO' button again to turn off the radio.

6.5 Display Dimmer

The 1.8-inch LED display features a dimmer function to adjust its brightness.

- Press the 'DIMMER' button (refer to Image 3 for location) repeatedly to cycle through different brightness levels (e.g., High, Medium, Low, Off).
- Select the brightness level that is most comfortable for your environment.

6.6 Sleep Timer

The sleep timer allows you to fall asleep to the radio, which will automatically turn off after a set period.

1. While the radio is playing, press the 'SLEEP' button.
2. Repeatedly press the 'SLEEP' button to cycle through the available sleep timer durations (e.g., 90, 60, 30, 15 minutes, OFF).
3. The radio will automatically turn off after the selected time.

6.7 Snooze Function

When the alarm sounds, press the 'SNOOZE' button (usually a large button on top) to temporarily silence the alarm. The alarm will sound again after a few minutes (typically 9 minutes).

6.8 Stopping the Alarm

To stop the alarm completely after it sounds, press the corresponding 'ALARM SET' button (Alarm 1 or Alarm 2) or the 'POWER' button. The alarm will reset for the next day.

7. MAINTENANCE

7.1 Cleaning

To maintain the appearance and functionality of your alarm clock radio:

- Always unplug the device from the power outlet before cleaning.
- Use a soft, dry, lint-free cloth to wipe the surfaces of the unit.
- Do not use abrasive cleaners, waxes, or solvents as they may damage the finish.
- For the display, gently wipe with a microfiber cloth to avoid scratches.

7.2 Battery Replacement

If the backup battery is depleted, replace it with a new 1 Lithium-ion battery following the instructions in Section 5.2.

Dispose of old batteries responsibly according to local regulations.

8. TROUBLESHOOTING

If you encounter any issues with your Soundmaster UR8400, please refer to the table below for common problems and solutions.

Problem	Possible Cause	Solution
No power/Display off	Power adapter not connected or faulty outlet.	Ensure the power adapter is securely plugged into the unit and a working wall outlet. Try a different outlet.
Alarm does not sound	Alarm not activated, set incorrectly, or weekend function is on.	Check if the alarm icon is displayed. Re-set the alarm time and source. Ensure the weekend function is off if you need the alarm on Saturday/Sunday.
Poor radio reception	Antenna not extended or interference.	Fully extend the FM wire antenna on the back of the unit. Reposition the unit to improve reception. Avoid placing near other electronic devices.
Time/Alarm settings lost after power outage	No backup battery or battery depleted.	Install a new 1 Lithium-ion backup battery.
Display too bright/dim	Dimmer setting needs adjustment.	Press the 'DIMMER' button repeatedly to cycle through brightness levels.

9. SPECIFICATIONS

Detailed technical specifications for the Soundmaster UR8400.

Feature	Specification
Product Type	Alarm Clock Radio
Model Number	UR8400
Brand	Soundmaster
Power Source	External AC Adapter
Required Voltage	AC 230V (50 Hz)
Backup Battery	1 Lithium-ion (not included)
Display Type	1.8-inch LED Digital Clock
Display Color	White
Display Features	Dimmer Function
Radio Tuner	FM-PLL
Radio Presets	10
Number of Alarms	2 (Dual Alarm)

Feature	Specification
Alarm Modes	Radio, Buzzer
Additional Features	Weekend Function, Snooze, Sleep Timer
Dimensions (H x W x D)	10 cm x 18 cm x 7.5 cm (approx. 3.9 in x 7.1 in x 3.0 in)
Weight	1.1 pounds (approx. 0.5 kg)
Mounting Type	Table Mount

10. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the documentation provided at the time of purchase or contact your local Soundmaster distributor or retailer. Keep your proof of purchase for any warranty claims.

Documents - Soundmaster – UR8400



[\[pdf\]](#)

Bedienungsanleitung BDA UR8400 21058 Jumbo LED Alarm PLL Uhrenradio mit 2 Weckzeiten und dimmbaren Display soundmaster® soundmaster de media woerlein Manuals |||

DEUTSCH ENGLISH FRANÇAIS NEDERLANDS ESPAÑOL PORTUGUÉS ČESTINA
 Hersteller Wrlin GmbH Gewerbestrasse 12 D 90556 Cadolzburg GERMANY Tel.: 49 9103/71670 Fax.: 49 9103/716712 Email. info@woerlein.com Web: www.woerlein.com
UR8400 Sicherheits- / Umwelt- / Aufstellhinweise HINWEIS ZUM UMWELTSCHUTZ

lang:de score:33 filesize: 2.41 M page_count: 49 document date: 2017-07-04



[\[pdf\]](#)

LOCATION OF CONTROLS alina Bedienungsanleitung BDA UR8400 21488 Jumbo LED Alarm PLL Uhrenradio mit 2 Weckzeiten und dimmbaren Display soundmaster® soundmaster de media woerlein Manuals |||

DEUTSCH ENGLISH FRANÇAIS NEDERLANDS ESPAÑOL PORTUGUÉS ČESTINA
 Hersteller Wrlin GmbH Gewerbestrasse 12 D 90556 Cadolzburg GERMANY Tel.: 49 9103/71670 Fax.: 49 9103/716712 Email. info@woerlein.com Web: www.soundmaster.de Vers. 2 **UR8400** Sicherheits- / Umwelt- / Aufstellhinweise HINWEIS ZUM UMWELT...

lang:de score:32 filesize: 2.22 M page_count: 45 document date: 2022-05-10



Dieses Produkt darf am Ende seiner Lebensdauer nicht über den normalen Haushaltsabfall entsorgt werden sondern muss an soundmaster de media woerlein Manuals |||

DEUTSCH ENGLISH FRANÇAIS NEDERLANDS ESPAÑOL PORTUGUÊS CESTINA

Hersteller Wrllein GmbH Gewerbestrasse 12 D 90556 Cadolzburg GERMANY Tel.: 49
9103/71670 Fax.: 49 9103/716712 Email. info.woerlein.com Web:

www.soundmaster.de Vers. 2 **UR8400** Sicherheits- / Umwelt- / Aufstellhinweise
HINWEIS ZUM UMWELT...

lang:de score:32 filesize: 2.35 M page count: 45 document date: 2021-05-26



[\[pdf\]](#) User Manual Instructions

Soundmaster UR8400 indd verdictp3 user manual or packaging This symbol indicates the presence of dangerous voltage inside enclosure sufficient enough to cause electric shock **WARNING**

328c4ffb88618d23da922efe06628e9d files ecommercecdn uk 227502

ENVIRONMENTAL PROTECTION Do not dispose of this product with the normal household waste at the end o ... battery is incorrectly replaced Replace only with the same or equivalent type **UR8400** / English Instruction Manual 14 15 PM 16 17 18 19 20 FUNCTION AND CONTROLS 1. VOLUME DOWN...

lang:en score:32 filesize: 346.28 K page count: 6 document date: 2015-06-29



de despertador radio pitido → AL selecciona días la semana con los botones 3 5 Normal modo Page 30

Español soundmaster Manuals srsItid

AfmBOorCXcyd84EIZ5thRMYTsx3SISzkqCxFB9K0dmbcwpvZTnDBqsjh |||

DEUTSCH ENGLISH FRANÇAIS NEDERLANDS ESPAÑOL PORTUGUÊS CESTINA

Hersteller Wrlein GmbH Gewerbeastrasse 12 D 90556 Cadolzburg GERMANY Tel.: 49
9103/71670 Fax.: 49 9103/716712 Email. info@woerlein.com Web:

www.soundmaster.de Vers. 2 **UR8400** Sicherheits- / Umwelt- / Aufstellhinweise
HINWEIS ZUM UMWELT...

lang:de score:31 filesize: 2.22 M page count: 45 document date: 2022-05-10

EG-Konformitätserklärung (DOC)

Der Unterzeichner

WOERLEIN GMBH GEWERBESTRASSE 12 D-90556 Cadolzburg	
---	--

erklärt hiermit in alleiniger Verantwortung, dass das Produkt

Produkt:	soundmaster - UR8400 (ab PO21058) Clock Radio
----------	--

in Übereinstimmung ist mit den Bestimmungen der nachstehenden EG-Richtlinie(n)
(einschließlich aller zutreffenden Änderungen)

Referenz-Nr.	Titel
2014/53/EU	RFD Richtlinie
2009/125/EC	Ökodesignrichtlinie
2011/65/EC	RoHS Richtlinie

und dass folgende Normen und/oder technische Spezifikationen zur Anwendung
gelangt sind

Nr.	Anzahl	Standard
1.	3.1a	EN 60955:2014
2.	3.1a	EN 60311:2008
3.	3.1b	EN 55032:2015
4.	3.1b	EN 55035:2017/A11:2011
5.	3.1b	EN 61000-3-2:2014
6.	3.1b	EN 61000-3-3:2013
7.	3.1b	EN 55014-1:2006/A1:2009+A2:2011
8.	3.1b	EN 55014-2:2015
9.	3.2	Final Draft EN 203345 V1.1.7 (2017-03)
10.	ENF	Vorschriftung 12752008
11.	RoHS	EN 50581:2012

Die benannte Stelle SGS United Kingdom Limited, mit der Registrierungs- 0890,
hat die EU Baumusterprüfbescheinigung mit der Zertifikatsnummer 233061/18452
am 9. Juni 2017 ausgestellt.

Cadolzburg, den 14.09.2017

WOERLEIN GMBH
Geschäftsführer: ...
D-90556 Cadolzburg
Tel: 09103-71177-0
Fax: 09103-71177-12

Ralf Woerlein - Geschäftsführer

[pdf] Declaration of Conformity

soundmaster de Created Date 9 20 2017 2 47 02 PM CE UR8400 21058 media woerlein

Konformitätserklärungen |||

EG -Konform itterklru nq DOC Der Unterzeichner RLEIN GMBH

GEWERBESTRASSE 12 D-90556 Cadolzburg erklärt hiermit in alleiniger Verantwortung,
dass das Produkt Produkt: soundmaster- **UR8400** ab PO21058 Clock Radio in
bereinstimmung ist mit den Bestimmungen der nachstehenden EG-Richtlinie n ein...
lang:de score:31 filesize: 944.36 K page_count: 1 document date: 2017-09-20



[pdf]

UR8400 soundmaster® Deutsche Bedienungsanleitung Festsender abspeichern und abrufen Wählen Sie
den gewünschten Sender wie oben beschrieben an Drücken halten die Taste MEM SET M 6 für ca 2
Sekunden bis BDA 20246 soundmaster de media woerlein Manuals |||

DEUTSCH ENGLISH FRANÇAIS NEDERLANDS ESPAOL PORTUGUS **UR8400**

Dieses Symbol zeigt an, dass im Inneren des Gertes gefährliche Spannungen
vorhanden sind, und einen Stromschlag verursachen können. Dieses Symbol weist auf
wichtige Bedienungs- und Wartungsanweisungen bezüglich des Geräts hin. Sicherheits- /
Um...

lang:de score:31 filesize: 1.86 M page_count: 42 document date: 2012-12-19

EG-Konformitätserklärung

Der Unterzeichner

WOERLEIN GMBH GEWERBESTRASSE 12 D-90556 Cadolzburg	
---	--

erklärt hiermit, dass das Produkt

Produkt:	soundmaster - UR8400 Clock Radio
----------	-------------------------------------

in Übereinstimmung ist mit den Bestimmungen der nachstehenden EG-Richtlinie(n)
(einschließlich aller zutreffenden Änderungen)

Referenz-Nr.	Titel
2004/108/EC	Elektromagnetische Verträglichkeit
2006/95/EC	Niederspannungsrichtlinie
2011/65/EC	Ökodesignrichtlinie
2011/65/EC	RoHS Richtlinie

und dass folgende Normen und/oder technische Spezifikationen zur Anwendung
gelangt sind

Nr.	Standard
1	EN 55013:2007+A1:2003+A2:2008
2	EN 60528:2007+A11:2011
3	EN 60311-4:2009+A1:2009+A2:2011
4	EN 60311-4:2009+A1:2011+A2:2008
5	EN 61000-3-2:2006+A1:2009+A2:2009
6	EN 61000-3-3:2008
7	EN 55014:2006+A1:2009+A2:2011
8	EN 55014-2:2015
9	Vorschriftung 12752008

Cadolzburg, den 28.08.2014

WOERLEIN GMBH
Geschäftsführer: ...
D-90556 Cadolzburg
Tel: 09103-71177-0
Fax: 09103-71177-12

Ralf Woerlein - Geschäftsführer

[pdf]

Konformitätserklärung CE UR8400 20246 Jumbo LED Alarm PLL Uhrenradio mit 2 Weckzeiten und

dimmbaren Display soundmaster® soundmaster de media woerlein Konformitätserklärungen |||

EG -Konform itterklru nq Der Unterzeichner IN GMBH GEWERBESTRASSE 12 D-
90556 Cadolzburg erklärt hiermit, dass das Produkt soundmaster- **UR8400** Clock Radio
in bereinstimmung ist mit den Bestimmungen der nachstehenden EG-Richtlinie n
einschließlich aller zutreffenden Änderungen Referenz-Nr. 2004...

lang:de score:29 filesize: 55.9 K page_count: 1 document date: 2014-10-09



[pdf]

UR8400 UR 8400UHRZEITEINSTELLUNG 14 AL2 ALARM 2 EIN AUS EINSTELLUNG 15 AL1 1 16
LAUTSPRECHER 17 AC NETZKABEL 18 UKW WURFANTENNEbrugsanvisning 1196686 radiovaekkeur
soundmaster ur8400 fm sortasset conrad media10 add 160267 c1 de 001196686ML01 brugsanvisning
sort |||

DEUTSCH ENGLISH FRANÇAIS geprüfte Sicherheit NEDERLANDS ESPAÑOL
PORTUGUÊS UR 8400 Dieses Symbol zeigt ... i falscher Batteriehandhabung Nur
durch den selben oder baugleichen Batterietyp ersetzen. **UR8400** / Deutsche
Bedienungsanleitung 14 15 PM 16 17 18 19 20 BEDIENELEMENTE 1. LAUTSTRKE
2. LAU...

lang:de score:25 filesize: 442.05 K page_count: 8 document date: 2013-06-20



[pdf]

Untitled Produktdatenblatt Radiowecker SOUNDMASTER UR8400 Pollin de D630681 D pollin at media 8f
1b 95 1701723145 |||

UR8400 Jumbo-LED-Alarm PLL Uhrenradio mit 2 Weckzeiten und dimmbaren
Display Technische Daten: PLL Radio mit Festsenderspeicher groes weies 1,8 Jumbo
LED-Display 3-stufig dimmbares Display Auto-Off : Display schaltet sich bei Inaktivitt
automatisch ab und wird durchBettigung einer Taste wieder f...

lang:i-klingon score:25 filesize: 163.62 K page_count: 1 document date: 2022-10-08




[pdf] Datasheet

Prospekt PR UR8400 DE Jumbo LED Alarm PLL Uhrenradio mit 2 Weckzeiten und dimmbaren Display
soundmaster® soundmaster de media woerlein Datasheets |||

UR8400 Jumbo-LED-Alarm UKW-PLL Uhrenradio mit 2 Weckzeiten und dimmbaren
Display Technische Daten: PLL Radio mit Festsenderspeicher groes weies 1,8 Jumbo
LED-Display 3-stufig dimmbares Display Auto-Off : Display schaltet sich bei Inaktivitt
automatisch ab und wird durchBettigung einer Taste wied...

lang:i-klingon score:23 filesize: 2.79 M page_count: 1 document date: 2022-04-21

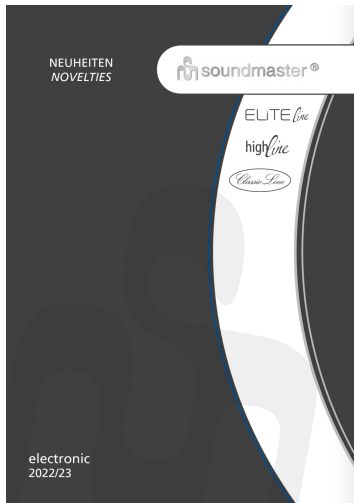

[\[pdf\]](#) Flyer Borchure

WOE101 22 Neuheitenflyer 01 16 v2 indd hier Marken Gizmo Retail Soundmaster Noviteiten 2022 2023
gizmo retail nl media wysiwyg Brochures |||

NEUHEITEN NOVELTIES electronic 2022/23 Nachhaltigkeit sustainability Nachhaltig und verantwortun ... S Charging Current max. 3A Inclusive Keyring Uhrenradios Clockradios Uhrenradios Clock radios **UR8400** Jumbo-LED-Alarm UKW-PLL Uhrenradio mit 2 Weckzeiten und dimmbaren Display Jumbo LED Alarm FM...
lang:en score:23 filesize: 1.24 M page_count: 16 document date: 2022-09-13



[\[pdf\]](#) Datasheet

UR8400 soundmaster de Jumbo LED clock radio with dimmer FM PLL 10 preset stations 1 8 high display
3 step Display automatic switch off reactivation by any button PR EN Datasheets |||

UR8400 Jumbo LED clock radio with dimmer Technical Features: FM-PLL radio 10 preset stations 1.8 high LED display with 3-step dimmer Display with automatic switch-off / reactivation by any button Dual alarm with weekend function Wake-up by radio/buzzer NAP timer Sleep/snooze timer Back-up ...

lang:en score:22 filesize: 2.79 M page_count: 1 document date: 2024-06-26



[\[pdf\]](#) Datasheet

UR8400 soundmaster Jumbo LED Alarm FM PLL Clock Radio with Dual and Dimming Display Memory Preset Big white 1 8 PR EN de media woerlein Datasheets PRESET BACKUP SLEEP DISPLAY JUMBO View |||

UR8400 Jumbo LED Alarm FM-PLL Clock Radio with Dual Alarm and Dimming Display Technical Features: PLL Radio with Memory Preset Big white 1,8 Jumbo LED Display 3-level Dimming Display Auto-OFF: Display Shut OFF Automatically by Inactivity. After Pressing anyButton Display Appears for 10 sec. Wak...

lang:en score:21 filesize: 1.76 M page_count: 1 document date: 2020-10-22



[\[pdf\]](#) Declaration of Conformity

soundmaster 2024 niwotron ch index cfm action act getfile doc id 102184 |||

electronic 2024/25 Nachhaltigkeit sustainability Nachhaltig und verantwortungsvoll zu arbeiten, ... tteries not incl. AC/DC adaptor 5 V/2 A incl. 10 www.soundmaster.de Uhrenradios Clock radios **UR8400** Jumbo LED Uhrenradio mit Dimmer Jumbo LED clock radio with dimmer UKW-PLL Radio 10 Festsend...

lang:en **score:18** filesize: 16.97 M page_count: 68 document date: 2024-09-12



[\[pdf\]](#) Declaration of Conformity

soundmaster 2023 niwotron ch index cfm action act getfile doc id 102006 |||

electronic 2023/24 Nachhaltigkeit sustainability Nachhaltig und verantwortungsvoll zu arbeiten, ... up battery 1 x CR2032 battery not incl. Mains operation AC 230 V - 50 Hz 10 www.soundmaster.de **UR8400** Jumbo LED Uhrenradio mit Dimmer Jumbo LED clock radio with dimmer UKW-PLL Radio 10 Festsend...

lang:en **score:18** filesize: 13.99 M page_count: 64 document date: 2023-02-10



[\[pdf\]](#) Catalog

Unser Neuheiten Katalog 2023 24 als Download Blogbereich links Blog soundmaster® Kat2023 HQ woerlein org Catalogues |||

electronic 2023/24 Nachhaltigkeit sustainability Nachhaltig und verantwortungsvoll zu arbeiten, ... up battery 1 x CR2032 battery not incl. Mains operation AC 230 V - 50 Hz 10 www.soundmaster.de **UR8400** Jumbo LED Uhrenradio mit Dimmer Jumbo LED clock radio with dimmer UKW-PLL Radio 10 Festsend...

lang:en **score:17** filesize: 61.1 M page_count: 64 document date: 2023-02-09



[\[pdf\]](#) Borchure Catalog

electronic gizmo retail nl Unsere hauseigene Servicewerkstatt hat nahezu 100 % aller Ersatzteile auch für Altgeräte auf Lager ein Gerät einfach als Müll Es wird k Soundmaster catalogus 2020 2021 pub media wysiwyg Brochures |||

electronic 2020/21 Nachhaltigkeit sustainability Nachhaltig und verantwortungsvoll zu arbeiten, ... ith Dimmer Sleep Snooze Battery Back-up for Clock 1 x CR2032 Battery not incl. AC 230V 50Hz **UR8400** Jumbo-LED-Alarm UKW-PLL Uhrenradio mit 2 Weckzeiten und dimmbaren Display Jumbo LED Alarm FM...

lang:en **score:15** filesize: 9.89 M page_count: 56 document date: 2020-03-23



[\[pdf\]](#) Decleration of Conformity

electronic Gizmo Retail Unsere hauseigene Servicewerkstatt hat nahezu 100 % aller Ersatzteile auf Lager auch für Altgeräte Es wird kein Gerät einfach als Müll soundmaster 2020 niwotron ch index cfm action act getfile doc id 101650 |||

electronic 2020/21 Nachhaltigkeit sustainability Nachhaltig und verantwortungsvoll zu arbeiten, ... ith Dimmer Sleep Snooze Battery Back-up for Clock 1 x CR2032 Battery not incl. AC 230V 50Hz **UR8400** Jumbo-LED-Alarm UKW-PLL Uhrenradio mit 2 Weckzeiten und dimmbaren Display Jumbo LED Alarm FM...

lang:en **score:15** filesize: 14.47 M page_count: 56 document date: 2020-03-23



[\[pdf\]](#)

Herunterladen Pro AV Multimedia Audio Radio Streaming Radios Soundmaster SCD2120GR Grün NewStore GmbH Support index dispatch attachments getfile attachment id 6465 shop newstore ch |||

50 Jahre electronic 2018/19 Inhalt 2018/19 2 www.woerlein.com Bluetooth DAB Internet 2018 ... AC Adapter included 42 www.woerlein.com Radiowecker Uhrenradios clock radios alarm clocks **UR8400** Jumbo-LED-Alarm PLL Uhrenradio mit 2 Weckzeiten und dimmbaren Display Jumbo LED Alarm PLL Clo...

lang:de **score:14** filesize: 9.26 M page_count: 68 document date: 2018-02-15



[\[pdf\]](#)

BL UR8400 DE User Produktbeschreibung Radiowecker SOUNDMASTER Pollin de D630681 B pollin at media e4 53 d2 1701723143 |||

...

lang:de score:13 filesize: 1.35 M page_count: 8 document date: 2022-10-08