Manuals+ — User Manuals Simplified.

AMD Direct ESTOP-RM-KIT E-STOP Gas Timer Surface Mounting Kit

AMD Direct ESTOP-RM-KIT E-STOP Gas Timer Surface Mounting Kit Instruction Manual

Contents

AMD Direct ⦿

AMD Direct ESTOP-RM-KIT E-STOP Gas Timer Surface Mounting Kit

Product Information

Specifications:

- **Model:** ESTOP-RM-KIT
- **Type:** E-STOP Gas Timer Surface Mounting Kit
- **Compatibility:** AMD Direct, Inc. MatchThrow (MT), Thermocouple Manual Safety (TMSI) Fire Pits and BBQ Grill applications
- **Warning:** For Outdoor Use Only
- **California Proposition 65 Warning:** Contains Chromium

Product Usage Instructions

Installation:

1. Tools Needed: Power Screwdriver with a Phillips head tip, 5/16 wrench or nut driver.
2. Step 1: Install two mounting brackets to each side of the ESTOP gas timer using provided screws.
3. Step 2: Ensure the ESTOP gas timer looks as shown in Fig. 2.
4. Step 3: Place the ESTOP into the hole and mark the mounting hole brackets to ensure proper alignment (Fig. 3).
5. Step 4: Secure the ESTOP to the wallboard using provided screws, washers, and nuts.
6. Step 5: Install the cover plate over the ESTOP gas timer aligning the holes and securing with mounting screws.
7. Step 6: Use gas-rated Teflon tape on gas lines to connect gas supply, checking for leaks before final operation.

FAQ:

- **Q: What tools do I need for installation?**

A: You will need a Power Screwdriver with a Phillips head tip and a 5/16 wrench or nut driver.

- **Q: Is this product suitable for indoor use?**

  A: No, this product is designed for outdoor use only.

- **Q: How do I check for gas leaks after installation?**

  A: Before final operation, apply gas-rated Teflon tape on gas lines and then check for leaks by conducting a

  leak test.

IF YOU CAN NOT READ OR UNDERSTAND THESE INSTALLATION INSTRUCTIONS DO NOT ATTEMPT TO INSTALL OR OPERATE THIS APPLIANCE

CALIFORNIA PROPOSITION 65
WARNING This product can expose you to Chromium, which is known to the state of California to cause cancer and birth defects or other reproductive harm. (For more information, go to **www.p65warnings.ca.gov**)

Warning: For Outdoor Use Only

PLEASE RETAIN THIS MANUAL FOR FUTURE REFERENCE

PRODUCT DESCRIPTION

This ESTOP-RM-KIT is surface surface-mounted design to be installed with an AMD Direct, Inc. Match Throw (MT) fire pit, a Thermocouple Manual Safety (TMSI) fire pit or BBQ grill applications. Use either the ESTOP1-0H or ESTOP2-5H gas timer models with this kit. The ESTOP Gas Timer is not supplied with this kit and must be purchased separately. The ESTOP gas timers must be oriented in the upright position as shown in the instructions. NOTE: All gas lines must enter from the back side of the ESTOP gas timer to use this mounting kit. Ensure to install the plugs provided with the ESTOP gas timer and seal them with gas-rated Teflon tape before installing this ESTOP-RM-KIT.
FOLLOW LOCAL CODES IF APPLICABLE FOR THIS INSTALLATION

INSTALLATION

Tools Needed: Power Screwdriver with a Phillips head tip, 5/16" wrench or nut driver.

- **Step 1:** Use the four (4) screws provided in the ESTOP gas timer box and install the two (2) mounting brackets

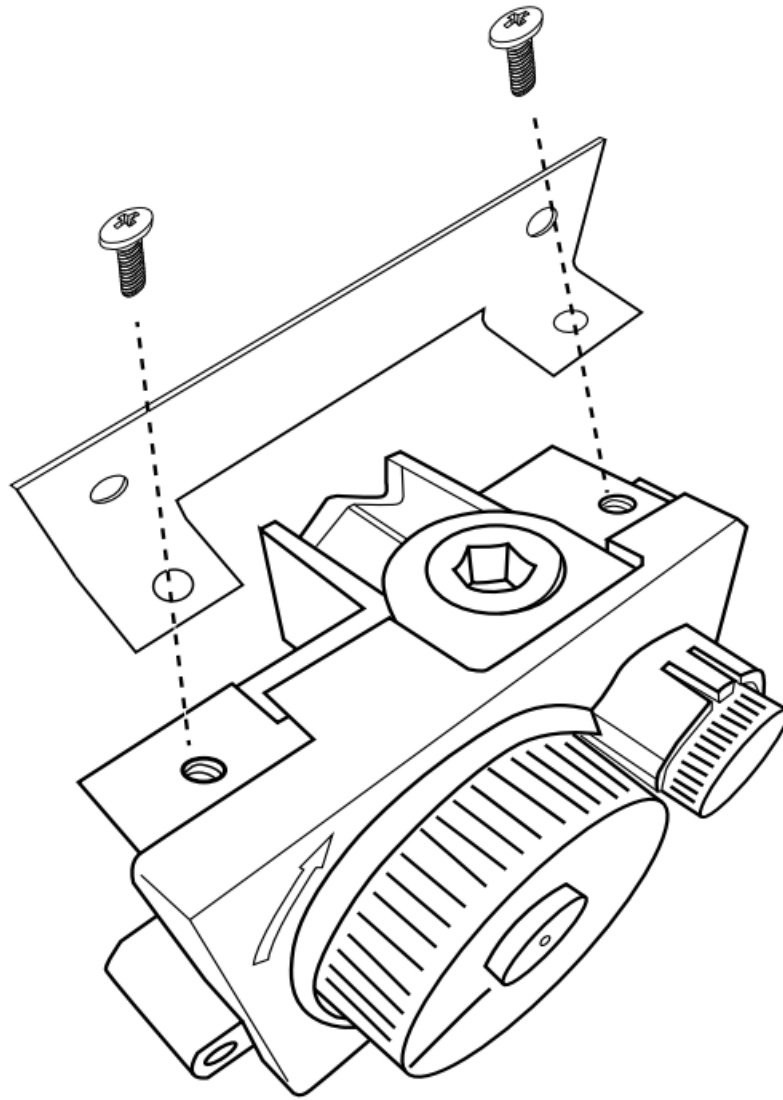 to each side of the ESTOP as shown in Fig. 1.

Fig. 1 Installing mounting brackets to ESTOP gas timer.

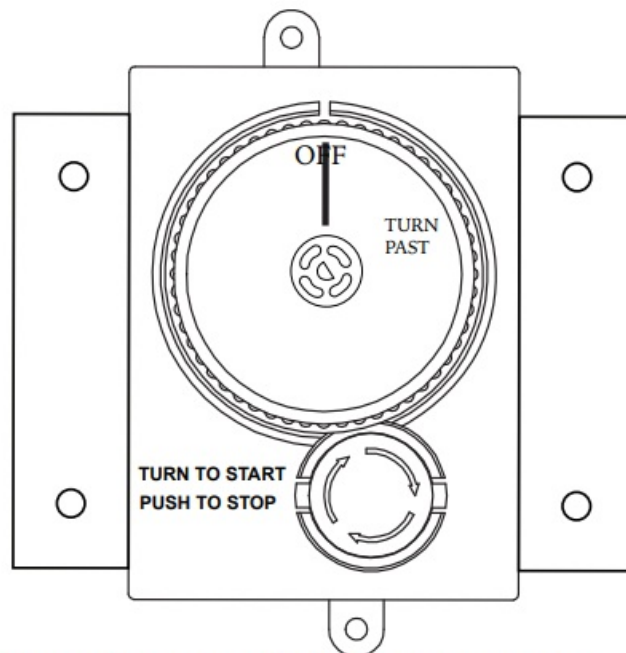- **Step 2:** After brackets are installed, the ESTOP gas timer should look like Fig. 2.

Fig. 2 Shows front view of ESTOP with mounting brackets installed.

- **Step 3:** Cut a 3⅛" wide x 4 ¾" tall hole into the wallboard where the ESTOP is to be located.

- **Step 4:** Place the ESTOP into the hole and mark the mounting hole brackets. Ensure the assembly is centred and level, then drill four ¼" holes in the wall for mounting. See Fig. 3.
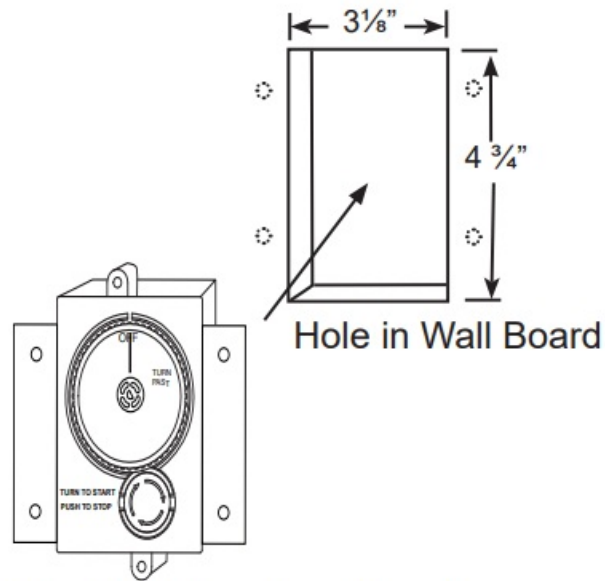

Fig. 3 Installing ESTOP gas timer into wall.

- **Step 5:** Install the (4) 10-24 x 1.25" Phillips screws through the mounting brackets, into the wall board holes and secure with a washer and nut (on the back side) for each hole.
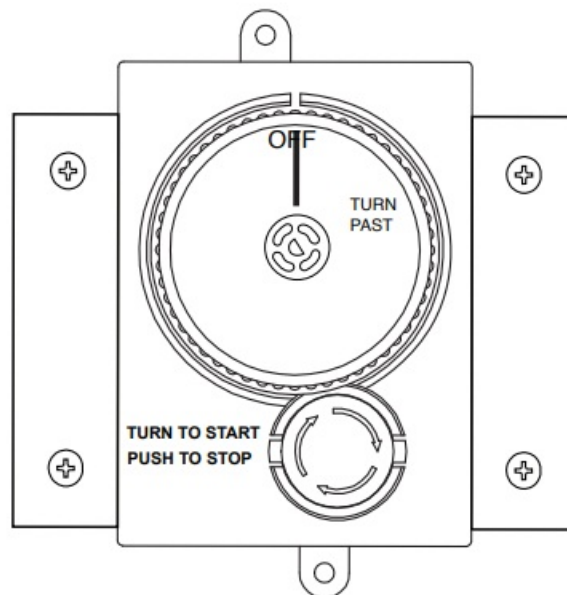

Fig. 4 Shows ESTOP mounted into wall.

- **Step 6:** Install the cover plate overtop of the ESTOP gas timer. Align the holes in the cover plate with the holes in the ESTOP gas timer (top and bottom) and install the two (2) mounting screws (#10-24×6.25 SS Phillips screws) to secure the cover plate as shown in Figs.5 and 6.
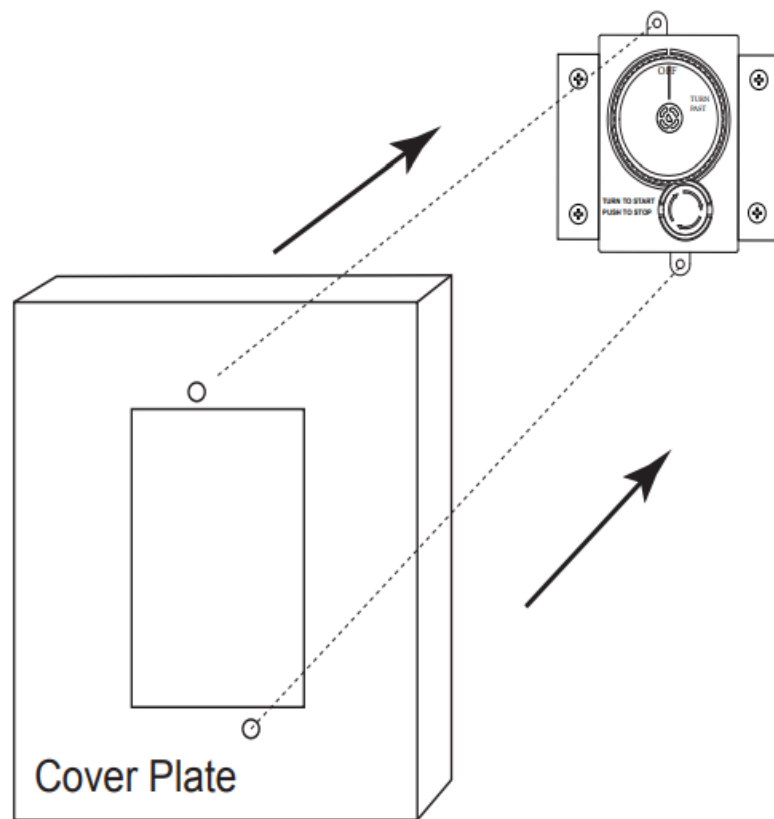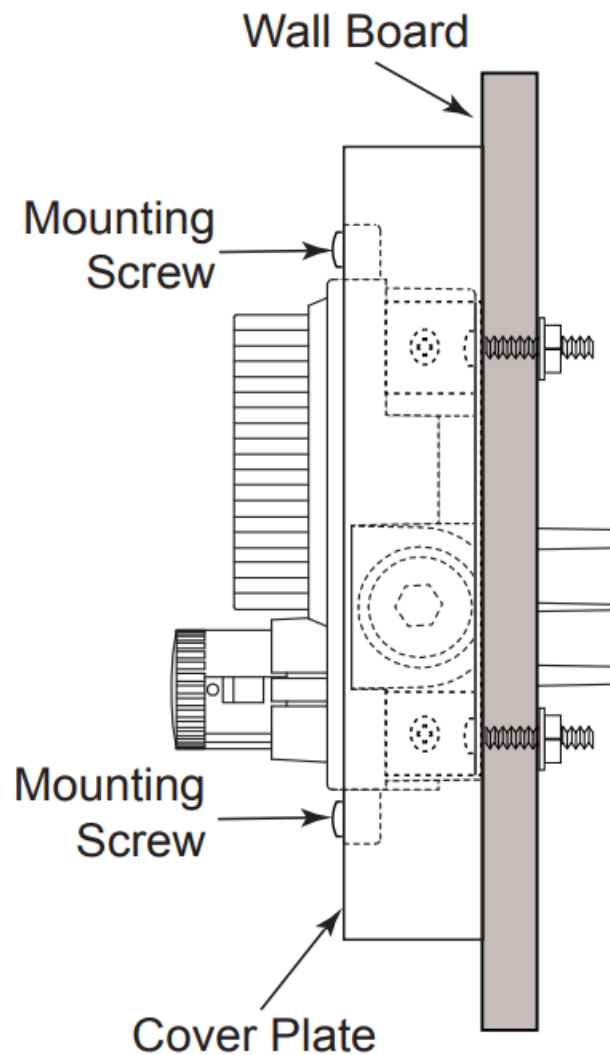
Fig. 5 Installing cover plate.

Fig. 6 Side view of ESTOP mounted into wall.

- **Step 7:** When the cover plate is installed over the ESTOP gas timer it will protrude ⅞". See Fig. 7 for outside dimensions.
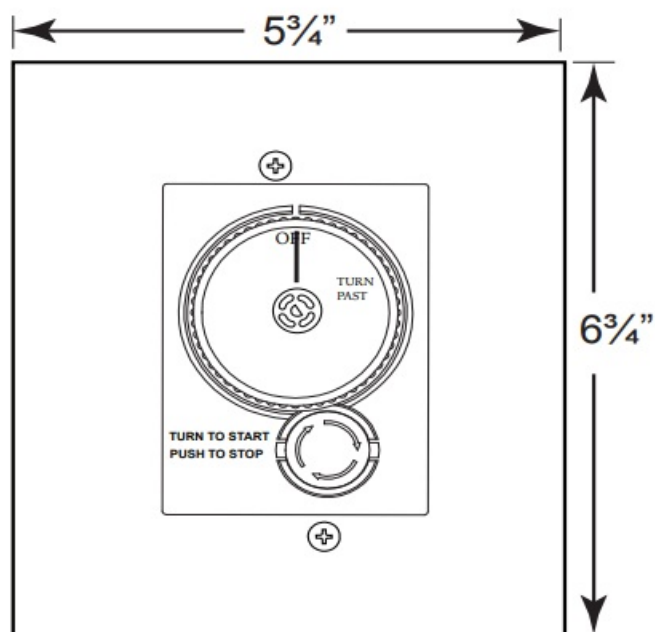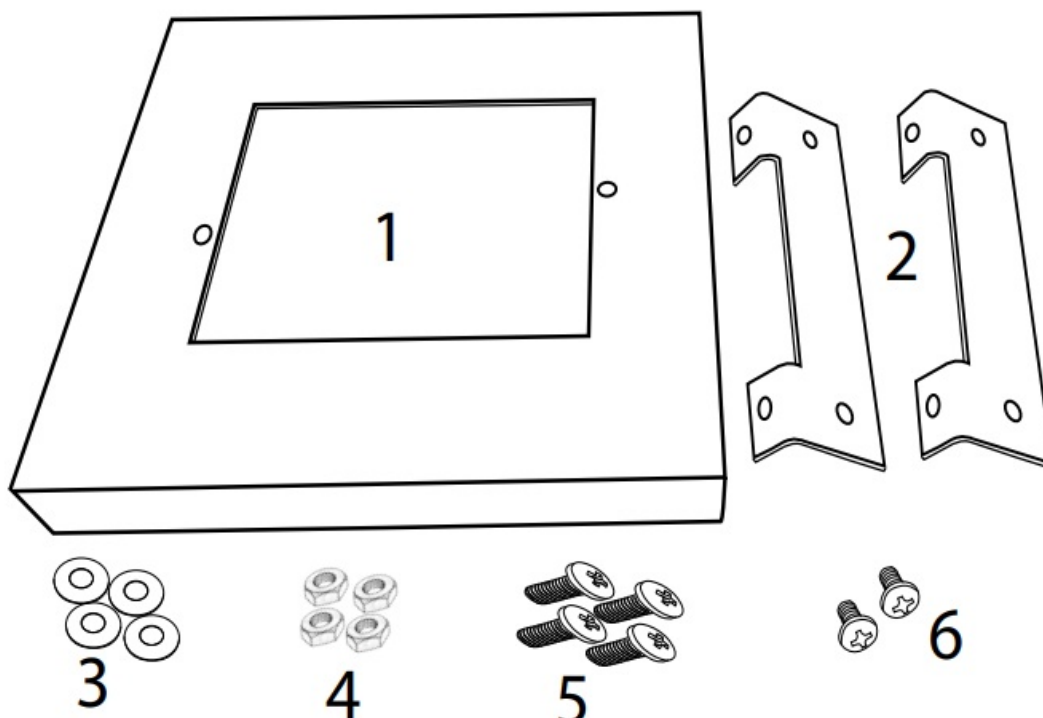

Fig.7 Cover plate outer dimensions.

- **Step 8:** After the ESTOP-RM-KIT is installed then use gas-rated Teflon tape on the gas lines to connect the gas supply. Ensure you check for gas leaks before the final operation.

REPLACEMENT PARTS

REPLACEMENT PARTS LIST

Item#	Description	Part Number	Qty.
1	Cover Plate Stainless	ESTOP-COVER-PLATE	1
2	Stainless Mounting Brackets	ESTOP-RECESS-BRKT 8	2
3	#10 Stainless Washers	WASHER10SS	4
4	#10-24 Stainless Nuts	ST3-113-1020	4
5	#10-24x 1¼" Phillips Pan Screw SS	SCREW1024PANSS	4
6	#10-24×6.25 Phil SS Panhead Screw	ST3-113-1019	2

FOR TECHNICAL SERVICE, CALL: **800-966-8126**

AMD Direct, Inc.
14520 Delta Ln, Suite 105
Huntington Beach, CA 92647
Web Site: www.AMDDirect.com

Manual changes often occur, ensure to check the AMD Direct, Inc.
website for any recent updates and warranty information.

Documents / Resources

AMD Direct ESTOP-RM-KIT E-STOP Gas Timer Surface Mounting Kit [pdf] Instruction Manual
ESTOP-RM-KIT, ESTOP-RM-KIT E-STOP Gas Timer Surface Mounting Kit, ESTOP-RM-KIT Timer Surface Mounting Kit, E-STOP Gas Timer Surface Mounting Kit, Timer Surface Mounting Kit, Timer Mounting Kit, Surface Mounting Kit, Mounting Kit, Kit

References

- **AMD Direct**
- **p65warnings.ca.gov**
- **User Manual**