


Contents [[hide](#)]

- [1 AMPBANK Diagnostic Tools DeepScan Max](#)
- [2 Product Information](#)
- [3 DeepScan](#)
- [4 Download & Install the APP](#)
- [5 Register & Log In](#)
- [6 Download the Diagnostic Software](#)
- [7 Bluetooth Connection](#)
- [8 Compliance Information](#)
- [9 FCC & 'SED Statement](#)
- [10 FAQ](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)

AMPBANK

AMPBANK Diagnostic Tools DeepScan Max

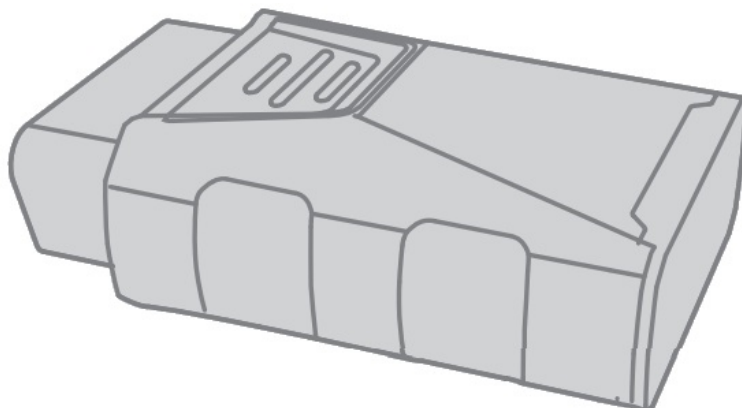


Product Information

Specifications:

- **Product Name:** Diagnostic Tools DeepScan Max
- **Model:** DeepScan Max
- **Brand:** Diagnostic Tools

DeepScan

Diagnostic Tools

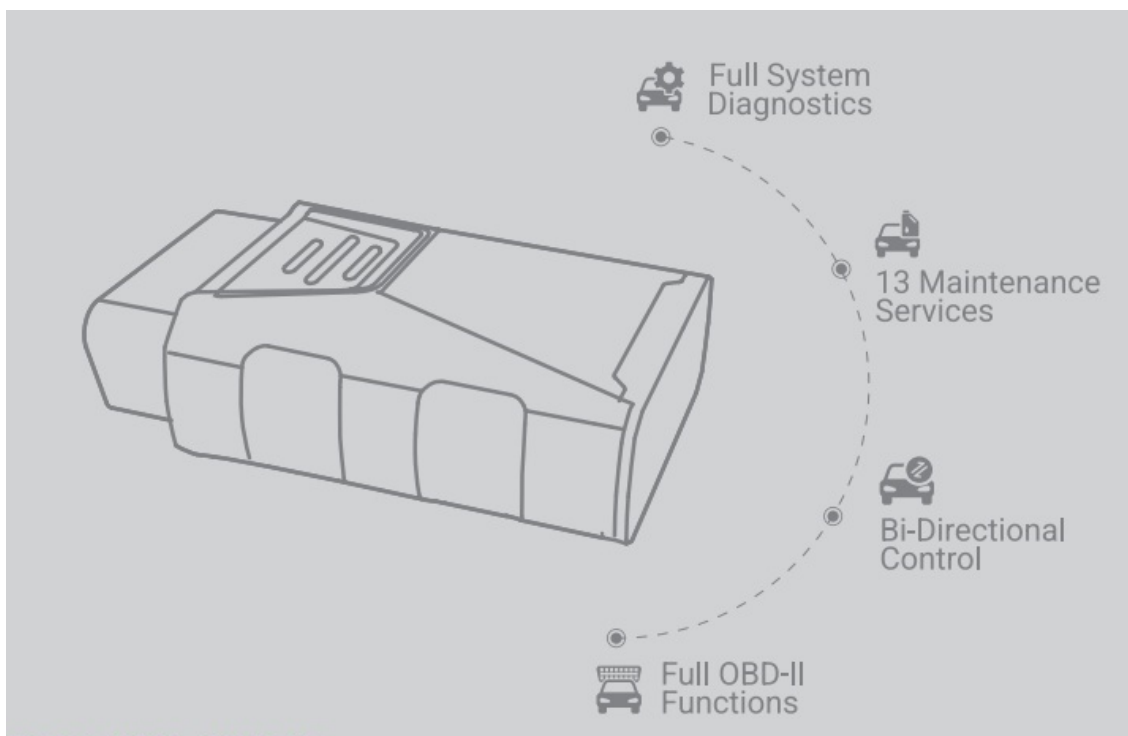


Thank you for purchasing the DeepScan. This quick user guide will walk you through the basic setup and operation of the DeepScan wireless diagnostic dongle. For the best user experience, carefully read and follow all the instructions and warnings.

Download & Install the APP



Search for “DeepScan OBD2 Scanner” in the App Store or Google Play to download and install.

Register & Log In

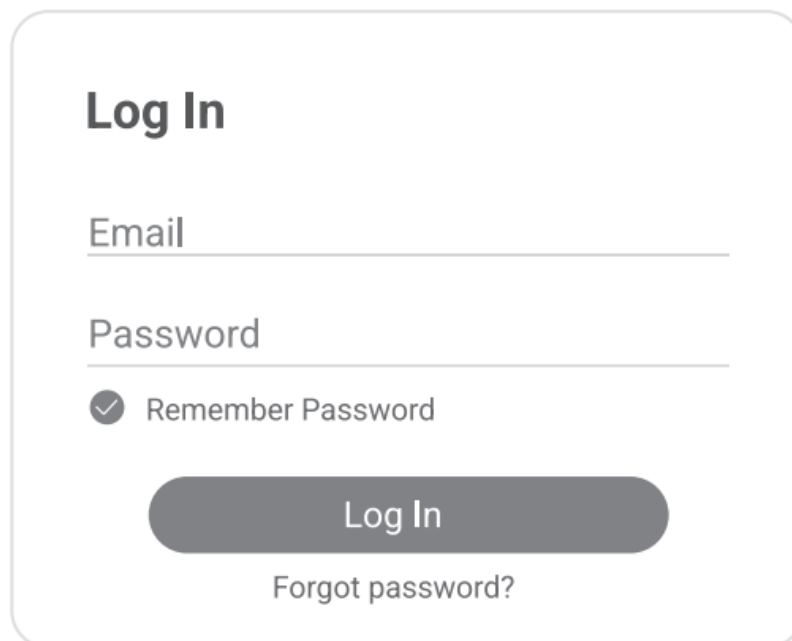A mockup of a 'Log In' screen. It features a title 'Log In' at the top. Below it are two input fields: 'Email' and 'Password'. Under the 'Password' field is a checkbox labeled 'Remember Password' which is checked. At the bottom is a large 'Log In' button and a link that says 'Forgot password?'.

Log In

Email

Password


☒ Remember Password

Log In

Forgot password?

Open the APP and log in to your account. (If you do not have an account, please register with your email.)

Bind the VCI

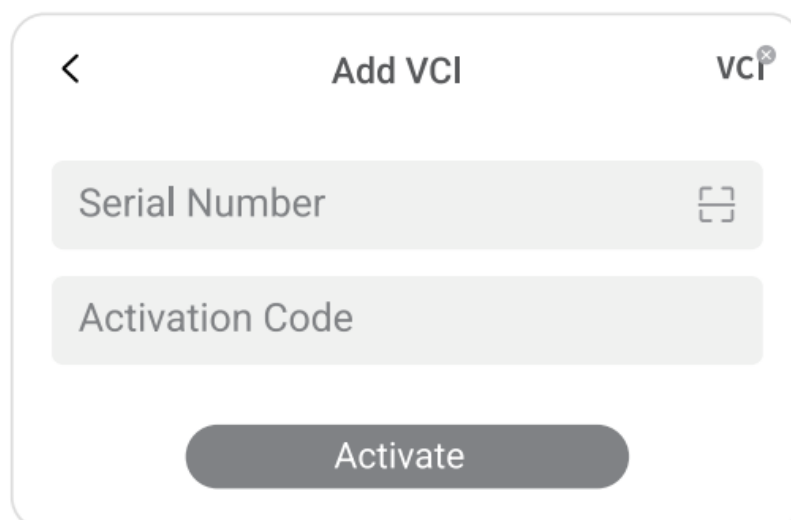A mockup of an 'Add VCI' screen. It has a back arrow on the top left, the title 'Add VCI' in the center, and a 'vci' icon with a plus sign on the top right. There are two input fields: 'Serial Number' with a QR code icon on the right, and 'Activation Code'. At the bottom is an 'Activate' button.

< Add VCI vci⁺

Serial Number

Activation Code


Activate

Tap Me > VCI Management > Add VCI.

- To get the serial number and activation code, please scan the QR code on the product. (Alternatively, once the Bluetooth connection between the


- DeepScan and your phone is established, the serial number and activation code will be automatically recognized.) Then, tap Activate.

Download the Diagnostic Software

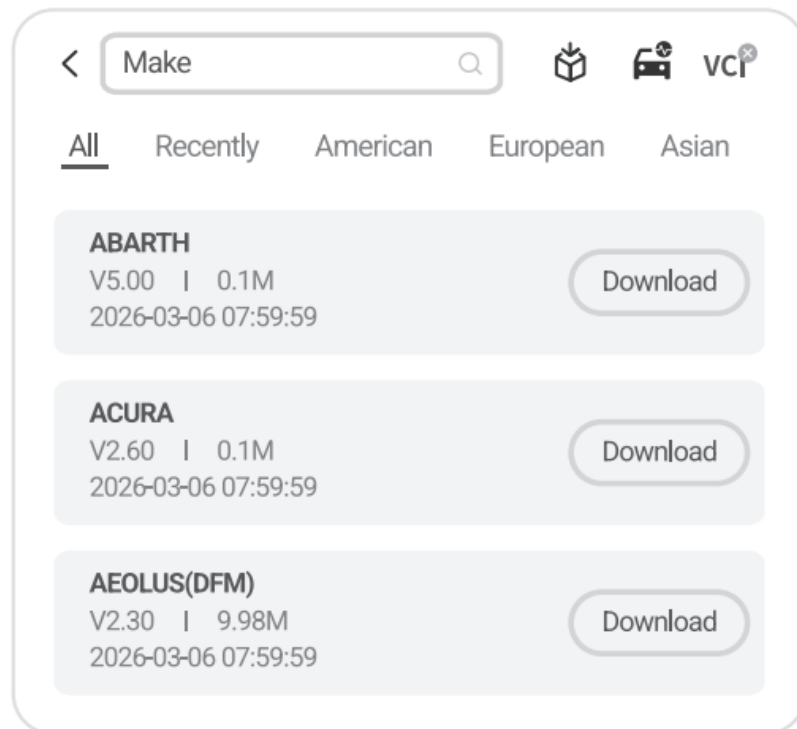

You will need to download the vehicle-specific software the first time you use the diagnostic function. Tap Diagnostics on the home screen and download the software you need.

Plug the DeepScan into the vehicle's OBD-II port.

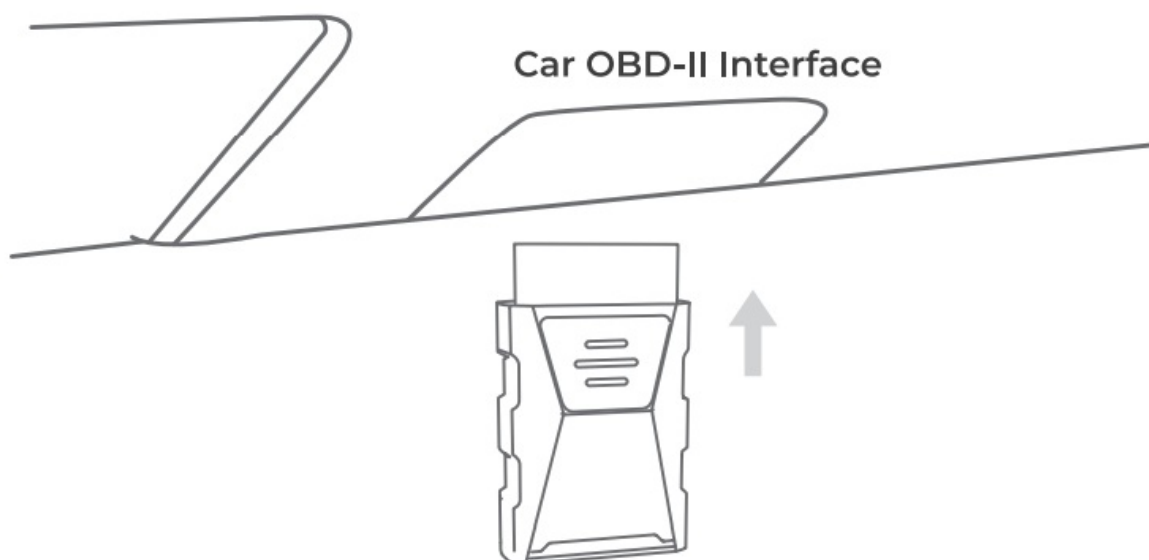


The vehicle's OBD-II port is usually located under the dashboard.


Turn the ignition to the “ON” position.



The green LED light on the DeepScan indicates it is powered on.

Bluetooth Connection

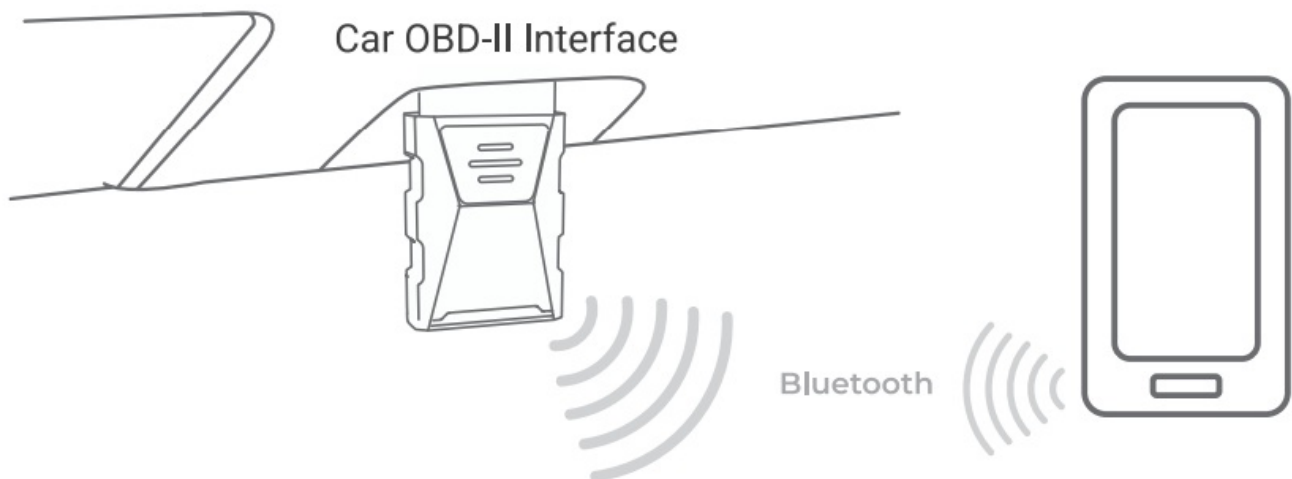

Tap Diagnostics on the home screen, then tap  at the top right of the screen to establish a Bluetooth connection with the unit. When connection is established, the LED light on the unit will turn solid blue.

Your DeepScan is now ready for use.

Compliance Information

Regulatory Compliance

- **FCC ID:** 2BNZ7-DSCAN
- **IC:** 33598-DSCAN
- **HVIN:** DeepScan Max

FCC & 'SED Statement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses , and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This device contains licence-exempt transmitter(s) /receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

FAQ

What should I do if a communication error occurs?

Follow the steps below to identify the problem: Check if the ignition is ON. Check if the DeepScan is securely plugged into the vehicle's OBD-II port. Turn the ignition off. Then, turn it on after 10 seconds and continue the operation. Check if the vehicle's control module is defective.

Why do I need to download the diagnostic software after installing the DeepScan OBD2 Scanner?

Since there are various vehicle manufacturers, different diagnostic software is required for different brands.


What special functions does the DeepScan support?

The DeepScan supports 13 special functions, including Oil Reset, Throttle Adaptation, EPB Reset, ABS Bleeding, Steering Angle Reset, DPF Regeneration, Airbag Reset, BMS Reset, Injector Coding, Tire Pressure Monitoring System TPMS Reset , Sunroof Initialization, Seat Calibration, and Window Calibration.

Do I need to update the firmware before using it for the first time?

Yes. Firmware will automatically update to the latest version once the DeepScan is connected with your phone via Bluetooth. You can also tap Me > Firmware Update to update the firmware manually.

Documents / Resources

	AMPBANK Diagnostic Tools DeepScan Max [pdf] User Guide Diagnostic Tools DeepScan Max, Tools DeepScan Max, DeepScan Max
---	---

References

- [User Manual](#)

AMPBANK, DeepScan Max, Diagnostic Tools DeepScan Max, Tools DeepScan Max

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.