



# AMX UVC1-4K Audio Video Control Systems User Guide

[Home](#) » [AMX](#) » AMX UVC1-4K Audio Video Control Systems User Guide 

## AMX UVC1-4K Audio Video Control Systems



### Contents

- [1 Overview](#)
- [2 What's in the box](#)
- [3 Specifications](#)
- [4 Installation](#)
- [5 Interface](#)
- [6 LED Indicator and Video Notification](#)
- [7 System Requirement](#)
- [8 AMX UVC Configuration Tool User Guide](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)

## Overview

UVC1-4K is a high-quality, high-performance capture device which is specially designed for high-definition and 4K video capture applications. It supports 1 channel of up to 4096×2160p @ 60 fps video from an HDMI source and selectable HDMI or 3.5mm analog audio.



## What's in the box

The following items are included with the UVC1-4K:

- USB 3.0 A to C Cable
- Quick Start Guide (QSG)

## Specifications

UVC1-4K SPECIFICATIONS	
Video Input Interface	HDMI 2.0
Audio Input Interface	HDMI Embedded Audio / 3.5mm Analog Stereo Audio
Video RAW Data Format	YUY2, P010 (Support on outputs below 1080P60) NV12, I420 (Support on all outputs)
Video Input Resolution	Up to 4096×2160p@60fps (4:4:4 10-Bit HDR)
Recording Video Format	YUY2, P010, NV12, I420 (USB 3.0)
UVC Output Resolution	4096×2160p@60/50fps and 3840×2160p@60/50fps inputs will be output at 3840×2160p@30fps (NV12, I420) or 1920×1080p@60fps (YUY2, P010) For all inputs below 3840×2160p@30fps, UVC1-4K outputs will match the input resolution
LED	Red/Green
OS Compatibility	Windows 10 (64-bit) macOS 10.12 or newer
Power Consumption	3.57W Max (4.76V / 750mA)
Dimensions (H x W x D)	0.66" x 1.43" x 3.44" (17.0mm x 36.3mm x 87.3mm)
Weight	93.62g


## Installation

UVC1-4K supports operating system:

- Windows 10 (64-bit)
- macOS 10.12 or newer

For UVC devices, such as the UVC1-4K, there is no need to install drivers.

The driver will activate automatically when the device is attached to your PC or Mac.

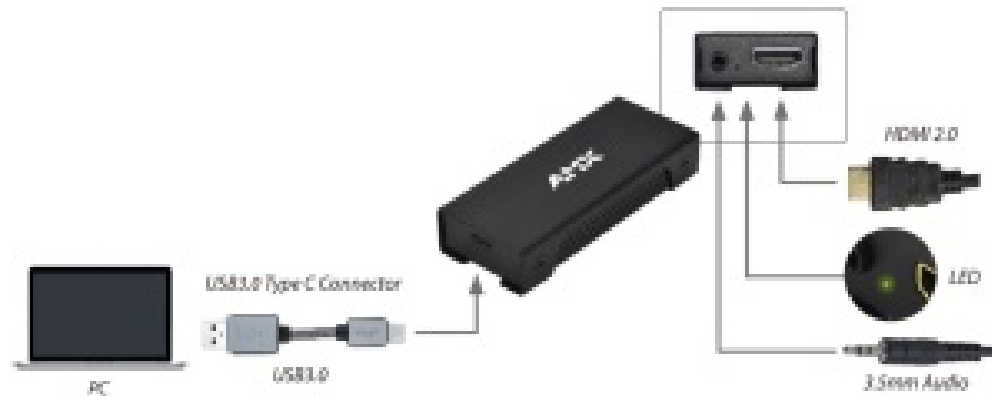

## Interface

- 3.5mm TRS audio jack for Line in/Mic in (Gain: Line in is 0dB, Mic in is 32dB)
- HDMI 2.0 port supports input resolution up to 4096×2160 pixels
- USB 3.0 Type C

## LED Indicator and Video Notification

LED	Video	Input status
Red	"No Signal" white text on a black background	HDMI is not connected
Red	"Signal Unlock" white text on a black background	HDMI is connected, but the signal is not locked
Green	Source video	HDMI is connected with source
Red & Green cross flashing	Content protection (video stops, freezes, etc.)	HDCP protected content

## System Requirement

Notebook	
CPU:	7th generation Intel® Core™ i7-7XXX (Quad-Core) or above
Memory:	8GB (dual-channel)
Graphic:	NVIDIA GeForce GTX 870M, Intel HD graphics 4000, or above
USB port:	USB3.0 standard type-A port (use USB3.0 type-C to type-A cable) Or USB3.0 type-C port (use USB3.0 type-C to type-C cable – not included with product)
Desktop PC	
CPU:	6th generation Intel® Core™ i5-6XXX (Quad-Core) or above
Memory:	8GB (dual-channel)
Graphic:	NVIDIA GeForce GTX 660, Intel HD graphics 4000, or above
USB port:	USB3.0 standard type-A port (use USB3.0 type-C to type-A cable) Or USB3.0 type-C port (use USB3.0 type-C to type-C cable – not included with product)


## AMX UVC Configuration Tool User Guide

- I. Connect UVC1-4K to PC with USB cable.
- II. If updating firmware, download firmware image file from AMX.com.
- III. Download and install “UVC Configuration Tool” application from [AMX.com](http://AMX.com).
- IV. Run UVC Configuration Tool to configure the connected UVC1-4K.
- V. Please close UVC Configuration Tool before using video capture software.

### 1. Video Settings:



(1) Preferred EDID: Select the preferred video resolution EDID setting for UVC1-4K capture device (for example 1920×1080 @ 60Hz). This setting indicates the preferred resolution to the video source.

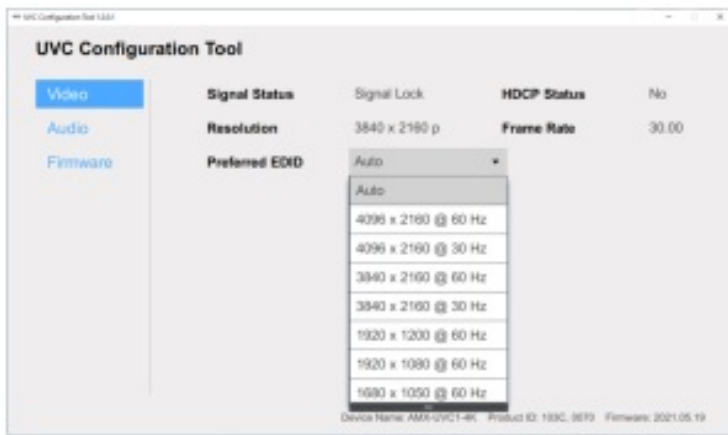

## 2. Audio Settings:

Select audio input source


- (1) HDMI: From HDMI embedded audio
- (2) Line in: From external analog audio
- (3) Mic in: From microphone
- (4) HDMI + Line in: Mix audio from HDMI and external analog audio
- (5) HDMI + Mic in: Mix audio from HDMI and microphone
- (6) NONE: UVC1-4K does not output audio




## 3. Firmware Update:

Update UVC1-4K device firmware with the following steps:

- (1) Press "Send firmware update" button

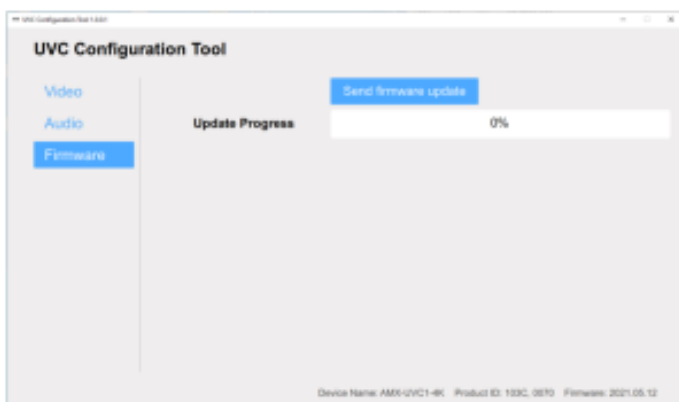

- (2) Browse to the firmware image and click open to select file.

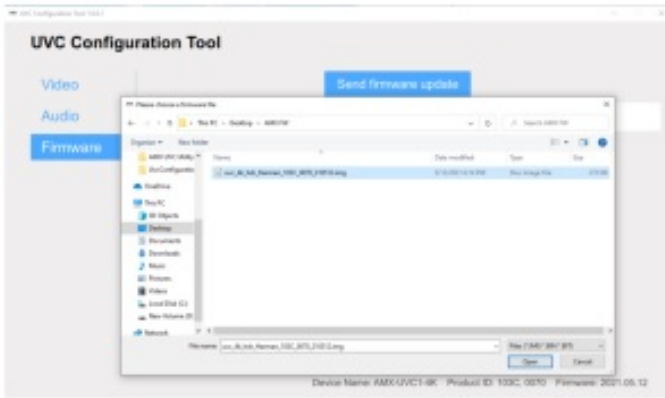


(3) If the firmware image file is incorrect or damaged, the update procedure will stop and show the following warning message.




(4) Click “YES” to install new firmware.

**\*\*Please do not disconnect power or USB during firmware update procedure**

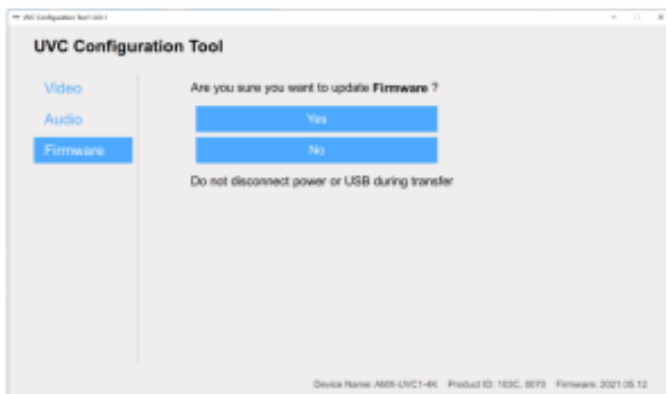

(5) Wait for the firmware update to complete (until 100% with “Update Successfully” message pop up).

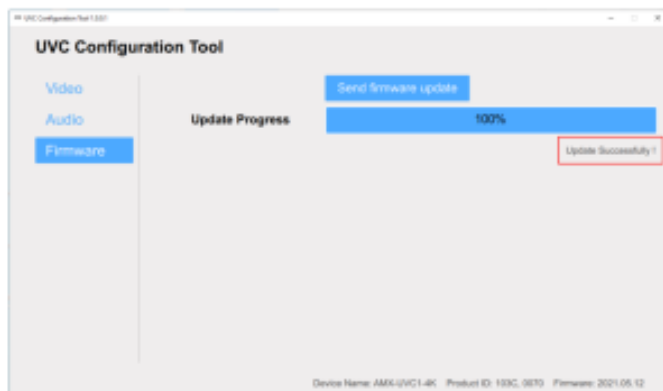


AMX does not assume responsibility for errors or omissions. AMX also reserves the right to alter specifications without prior notice at any time. The AMX Warranty and Return Policy and related documents can be viewed/downloaded at [www.amx.com](http://www.amx.com).

**3000 RESEARCH DRIVE, RICHARDSON, TX 75082** [AMX.com](http://AMX.com) | 800.222.0193 | 469.624.8000 |  
+1.469.624.7400 | fax 469.624.7153



## Documents / Resources

	<p><a href="#">AMX UVC1-4K Audio Video Control Systems</a> [pdf] User Guide UVC1-4K, Audio Video Control Systems</p>
---	--

[Manuals+](#).