



ANGUSTOS AL-H708L 8-Port PS-2-USB HDMI Single Rail LCD KVM Switch Owner's Manual

[Home](#) » [ANGUSTOS](#) » ANGUSTOS AL-H708L 8-Port PS-2-USB HDMI Single Rail LCD KVM Switch Owner's Manual 

ANGUSTOS AL-H708L 8-Port PS-2-USB HDMI Single Rail LCD KVM Switch



Contents

- [1 Overview](#)
- [2 Features](#)
- [3 Compatible Product](#)
- [4 SPECIFICATION](#)
- [5 CONNECTION DIAGRAM](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

Overview

Angustos AL-H708L LCD KVM Switch is optimized for high density Rack in modern Data Center. Supporting Full HD resolution for high end computers / servers.

Integrating a 17.3" LED screen, keyboard and mouse pad in a 1U rackmountable sliding housing. The short-depth design utilized for narrow space for short-rack mounting in condensed area. The AL-H708L can control up to 8 computers; with 8 additional KVM switches are cascaded, a single AL-H708L LCD KVM Switch can control up to 128 computers.

In addition, the AL-H708L included an additional hot-pluggable USB port that supports other keyboard and mouse for back-up. With all of the technology involved, the AL-H708L LCD KVM Switch has gone beyond the expectations and requirements for a modern Data Center use, which including :
short space optimization, exceptional display quality, easy to install, extreme versatility.

AL-H708L FRONT VIEW



AL-H708L REAR VIEW



Features

High Density Utilization

- Front USB for back up mouse-keyboard.
- LCD KVM console with an 17.3" LED-backlit 16:9 LCD monitor in a single rail design.
- Short-depth overall size allowing user to work with in condensed space of high density Rack
- Slide Lock – secure the console drawer to remain firmly in slide position when not in use.
- Extender compatible – Can be combined with Angustos KVM Extender up to 60m.

Flexible compatibility

- Superior video quality – up to 1920 x 1080 @60Hz; DDC2B; 16.7 Mil. Color.
- Cascade up to 128 computers from a single console (With compatible KVM Switches)
- Auto PS/2 and USB interface sensing.
- Keyboard and mouse emulation (PS/2 and USB) for seamless switching.
- Computer selection with pushbuttons, hotkeys, and multilingual on-screen display (OSD).
- Two level password security.
- Operates with all software and operating systems including all Windows versions, DOS, Linux, Unix, BSD, all Sun OS, all Mac OS and NetWare.
- Keyboard Language supports: English (UK), English (US), German (GER.) Japanese, Korean, Russian, Swedish, Chinese.

Installation Flexibility

- Standard rack mount kit included
- No software required – Plug and Play
- Firmware upgradable
- Supports hot-plugging

Raise efficiency



Saving time



Saving Cost



Plug and Play



Multiple Connection



Cascadable



17.3 Inch display (16:9)



Password Protected



Compatible Product

8 PORT HDMI 4K KVM SWITCH
AR-H08L



16 PORT HDMI 4K KVM SWITCH
AR-H16L



HDMI USB KVM EXTENDER
KCE600H



Angustos

Angustos was founded in 2000 and is now regarded as one of the foremost manufacturers of digital and analogue KVM solutions.

For more than 20 years our customers have been convinced by our core competencies in extending, switching and distributing standardised computer signals.

We are committed to established international standards. We can provide customers with complete Datacenter solutions as well as OEM/ODM services. We can cover even from medium to small business, factory & industrial, military & government, home office & personal use.


SPECIFICATION

KEYBOARD & MOUSE	
Keyboard	100 Keys, Detachable
	Multiple Languages Option
Compatible	Win/Sun/Unix/Linus/Mac

Mouse	Touchpad
Mouse Resolution	>1000 dots/inch (40×40/mm)
MTBF	1,000,000 Press
KVM SWITCH MODULE	
Direct PC connection	08
Maximum PC Connection	128
Port Selection	OSD, Button, Hot Key, IP (Opt)
Console Connector	HDMI Female
KVM Connector	HDMI + USB Type B x 8
Power	DC Jack
Switch button	Panel Digital Keys
Reset Switch	Panel Function Keys
Status LEDs	Nixie Tube (Selected Port)
	Red led (Online Port)
Server Interface	PS/2 , USB
Cascadable	Support
LCD MONITOR	
Size / Ratio	17.3" / 16:9
Video	Wide AHVA TFT-LCD
Visible Square	337.92 H x 270.336 V
Resolution	1920 x 1080P @ 60Hz (Optimal)
	3840 x 2610 @ 30Hz (Max)*
Color	16.7 Mil. , RGB 6bit + Hi_FRC
Contrast	600 : 1 (TyP)
Back light / Brightness	LED / 300 nit (cd/m2)

Pixel Pitch	0.1989 x 0.1989 mm
MTBF	100,000 hours
OPERATIONAL SPECIFICATION	
Operating Temp	-10 °C – 50 °C
Storage Temp	-20 °C – 60 °C
Humidity	0-80%RH, No Condensation
PHYSICAL SPECIFICATION	
Housing	Metal
Dimension LCD / KVM	407x445x45 / 148.4x445x45mm
Weight LCD / KVM	8.5 kg / 3.32 kg

CONNECTION DIAGRAM

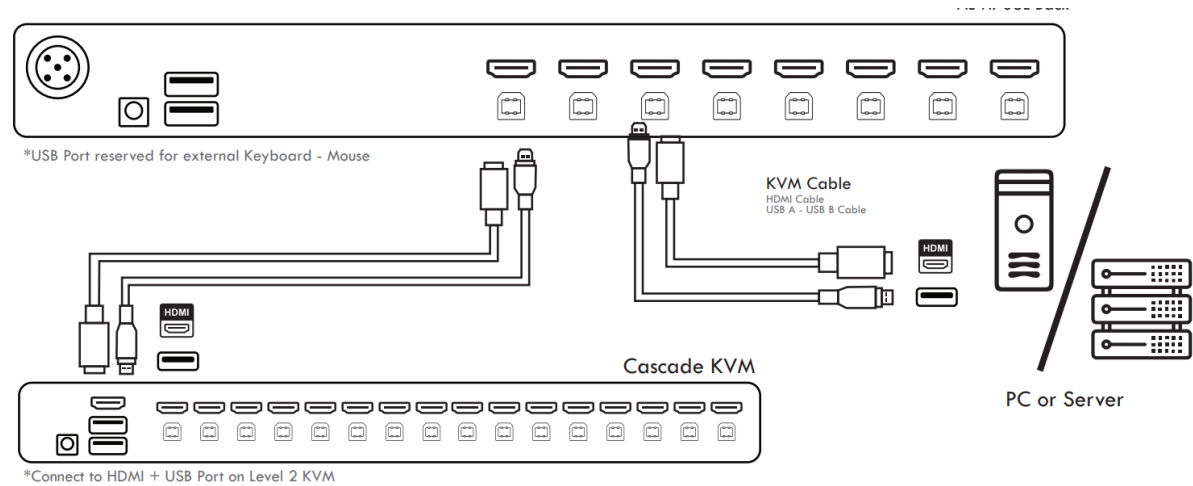



[ANGUSTOS AL-H708L 8-Port PS-2-USB HDMI Single Rail LCD KVM Switch](#) [pdf] Owner's Manual
AL-H708L 8-Port PS-2-USB HDMI Single Rail LCD KVM Switch, AL-H708L, 8-Port PS-2-USB H
DMI Single Rail LCD KVM Switch, HDMI Single Rail LCD KVM Switch, Single Rail LCD KVM S
witch, Rail LCD KVM Switch, LCD KVM Switch, KVM Switch, Switch

References

-  [ANGUSTOS - The Best Selling IT & Pro AV in USA Market!](#)