




ANGUSTOS AL-H716L 16-Port PS/2-USB HDMI Single Rail LCD KVM Switch Owner's Manual

[Home](#) » [ANGUSTOS](#) » ANGUSTOS AL-H716L 16-Port PS/2-USB HDMI Single Rail LCD KVM Switch Owner's Manual 

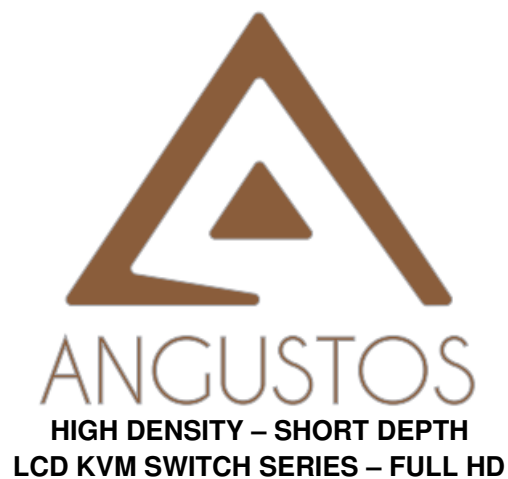

AL-H716L
16-Port PS/2-USB HDMI
Single Rail LCD KVM Switch

Contents

- [1 Overview](#)
- [2 Features](#)
- [3 Compatible Product](#)
- [4 SPECIFICATION](#)
- [5 OPERATIONAL SPECIFICATION](#)
- [6 PHYSICAL SPECIFICATION](#)
- [7 CONNECTION DIAGRAM](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)

Overview

Angustos AL-H716L LCD KVM Switch is optimized for high density Rack in modern Data Center. Supporting Full HD resolution for high end computers / servers.

Integrating a 17.3" LED screen, keyboard and mouse pad in a 1U rack mountable sliding housing. The short-depth design utilized for narrow space for short-rack mounting in condensed area. The AL-H716L can control up to 16 computers; with 16 additional KVM switches are cascaded, a single AL-H708L LCD KVM Switch can control up to 256 computers.

In addition, the AL-H716L included an additional hot-pluggable USB port that supports other keyboard and mouse for back-up. With all of the technology involved, the AL-H716L LCD KVM Switch has gone beyond the expectations and requirements for a modern Data Center use, which including : short space optimization, exceptional display quality, easy to install, extreme versatility.



Features

High Density Utilization









- Front USB for back up mouse-keyboard.
- LCD KVM console with an 17.3" LED-backlit 16:9 LCD monitor in a single rail design.
- Short-depth overall size allowing user to work with in condensed space of high density Rack
- Slide Lock – secure the console drawer to remain firmly in slide position when not in use.
- Extender compatible – Can be combined with Angustos KVM Extender up to 60m.

Flexible compatibility

- Superior video quality – up to 1920 x 1080 @60Hz; DDC2B; 16.7 Mil. Color.
- Cascade up to 256 computers from a single console (With compatible KVM Switches)
- Auto PS/2 and USB interface sensing.
- Keyboard and mouse emulation (PS/2 and USB) for seamless switching.
- Computer selection with pushbuttons, hotkeys, and multilingual on-screen display (OSD).
- Two level password security.
- Operates with all software and operating systems including all Windows versions, DOS, Linux, Unix, BSD, all Sun OS, all Mac OS and NetWare.
- Keyboard Language supports: English (UK), English (US), German (GER.) Japanese, Korean, Russian, Swedish, Chinese.

Installation Flexibility

- Standard rack mount kit included
- No software required – Plug and Play
- Firmware upgradable
- Supports hot-plugging

	Raise efficiency		Multiple Connection
	Saving time		Cascadable
	Saving Cost		17.3 Inch display (16:9)
	Plug and Play		Password Protected

Compatible Product



AR-H08L

8 PORT HDMI 4K KVM SWITCH



AR-H16L

16 PORT HDMI 4K KVM SWITCH



KCE600H

HDMI USB KVM EXTENDER

Angustos

Angustos was founded in 2000 and is now regarded as one of the foremost manufacturers of digital and analogue KVM solutions.

For more than 20 years our customers have been convinced by our core competencies in extending, switching and distributing standardised computer signals.

We are committed to established international standards. We can provide customers with complete Datacenter solutions as well as OEM/ODM services. We can cover even from medium to small business, factory & industrial, military & government, home office & personal use.

SPECIFICATION

KEYBOARD & MOUSE

Keyboard	100 Keys, Detachable
	Multiple Languages Option
Compatible	Win/Sun/Unix/Linus/Mac
Mouse	Touchpad
Mouse Resolution	>1000 dots/inch (40×40/mm)
MTBF	1,000,000 Press

KVM SWITCH MODULE

Direct PC connection	16
Maximum PC Connection	256
Port Selection	OSD, Button, Hot Key, IP (Opt)
Console Connector	HDMI Female
KVM Connector	HDMI + USB Type B x 16
Power	DC Jack
Switch button	Panel Digital Keys
Reset Switch	Panel Function Keys
Status LEDs	Nixie Tube (Selected Port)
	Red led (Online Port)
Server Interface	PS/2 , USB
Cascadable	Support

LCD MONITOR

Size / Ratio	17.3" / 16:9
Video	Wide AHVA TFT-LCD
Visible Square	381.88 H x 214.812 V
Resolution	1920 x 1080P @ 60Hz (Optimal)
	3840 x 2610 @ 30Hz (Max)*
Color	16.7 Mil. , RGB 6bit + Hi_FRC
Contrast	600 : 1 (TyP)
Back light / Brightness	LED / 300 nit (cd/m2)
Pixel Pitch	0.1989 x 0.1989 mm
MTBF	100,000 hours


OPERATIONAL SPECIFICATION

Operating Temp	-10 °C – 50 °C
Storage Temp	-20 °C – 60 °C
Humidity	0-80%RH, No Condensation

PHYSICAL SPECIFICATION

Housing	Metal
Dimension LCD / KVM	407x445x45 / 148.4x445x45mm
Weight LCD / KVM	8.5 kg / 3.32 kg

CONNECTION DIAGRAM

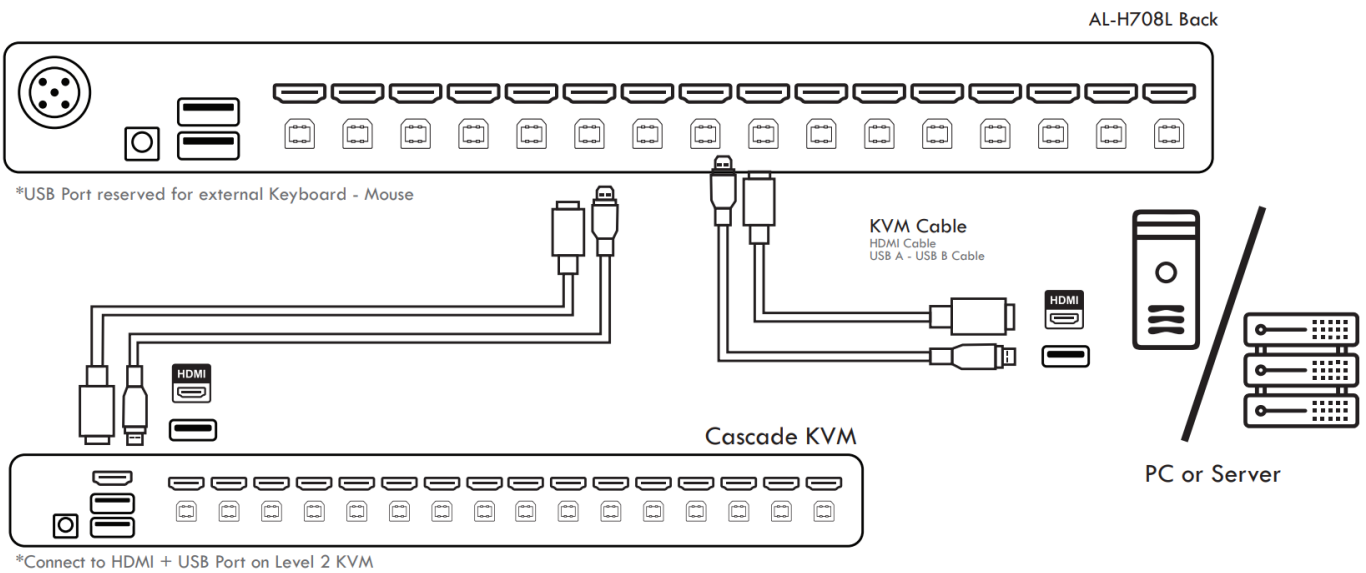


WWW.ANGUSTOS.COM



1309 COFFEEN AVE STE 1200
SHERIDAN, WYOMING 82801
USA

Documents / Resources

	<p>ANGUSTOS AL-H716L 16-Port PS/2-USB HDMI Single Rail LCD KVM Switch [pdf] Owner's Manual</p> <p>AL-H716L, 16-Port PS 2-USB HDMI Single Rail LCD KVM Switch, AL-H716L 16-Port PS 2-USB HDMI Single Rail LCD KVM Switch, PS 2-USB HDMI Single Rail LCD KVM Switch, HDMI Single Rail LCD KVM Switch, Single Rail LCD KVM Switch, LCD KVM Switch, KVM Switch, Switch</p>
---	--

References

- 
[ANGUSTOS - The Best Selling IT & Pro AV in USA Market!](#)

