



## ANGUSTOS AL-UV708L 8-Port USB CATx Single Rail LCD KVM Switch Owner's Manual

[Home](#) » [ANGUSTOS](#) » ANGUSTOS AL-UV708L 8-Port USB CATx Single Rail LCD KVM Switch Owner's Manual



ANGUSTOS AL-UV708L 8-Port USB CATx Single Rail LCD KVM Switch



## Contents

- [1 Overview](#)
- [2 Features](#)
- [3 Compatible Product](#)
- [4 Angustos](#)
- [5 SPECIFICATION](#)
- [6 Documents / Resources](#)
  - [6.1 References](#)

## Overview

Angustos AL-UV708L LCD KVM Switch is optimized for high density Rack in modern Data Center.

Integrating a 17" LED screen, keyboard and mouse pad in a 1U rack mountable sliding housing. The short-depth design utilized for narrow space for short-rack mounting in condensed area. The AL-UV708L can control up to 08 computers; with 8 additional KVM switches are cascaded, a single AL UV704L LCD KVM Switch can control up to 256 computers.

In addition, the AL-UV708L included an additional hot-pluggable USB port that supports other keyboard and mouse for back-up. With all of the technology involved, the AL-UV708L LCD KVM Switch has gone beyond the expectations and requirements for a modern Data Center use, which including : short space optimization, exceptional display quality, easy to install, extreme versatility.

### AL-UV708L FRONT VIEW



### AL-UV708L REAR VIEW



## Features

### High Density Utilization

- Front USB for back up mouse-keyboard.
- Connect to servers with distance up to 40m with single Cat5e / 6 UTP cable
- LCD KVM console with an 17" LED-backlit 4:3 LCD monitor in a single rail design.
- Short-depth overall size allowing user to work with in condensed space of high density Rack
- Slide Lock – secure the console drawer to remain firmly in slide position when not in use.

### Flexible compatibility

- Superior video quality – up to 1280 x 1024 @60Hz; DDC2B; 16.7 Mil. Color.
- Cascade up to 256 computers from a single console (With compatible KVM Switches)
- Auto PS/2 and USB interface sensing.
- Keyboard and mouse emulation (PS/2 and USB) for seamless switching.
- Computer selection with pushbuttons, hotkeys, and multilingual on-screen display (OSD).
- Two level password security.
- Operates with all software and operating systems including all Windows versions, DOS, Linux, Unix, BSD, all Sun OS, all Mac OS and NetWare.
- Keyboard Language supports: English (UK), English (US), German (GER.) Japanese, Korean, Russian, Swedish, Chinese.

### Installation Flexibility

- Standard rack mount kit included
  - No software required – Plug and Play
  - Firmware upgradable
  - Supports hot-plugging
  - Supports Over IP Module for Remote Control
- 
- Raise efficiency



- Saving time



- Saving Cost



- Plug and Play



- Multiple Connection



- Cascadable



- 17 Inch display (4:3)



- Password Protected



## Compatible Product

VGA KVM Dongle – CPU Module

**AC-DV100L**



DVI / HDMI KVM Dongle-CPU Module

**AC-DD100L / AC-DH100L**



SHORT DEPTH RACK KVM SWITCH  
**AR-V16L**



IP MODULE CARD  
**AIP-C**



## **Angustos**

Angustos was founded in 2000 and is now regarded as one of the foremost manufacturers of digital and analogue KVM solutions.

For more than 20 years our customers have been convinced by our core competencies in extending, switching and distributing standardised computer signals.

We are committed to established international standards. We can provide customers with complete Datacenter solutions as well as OEM/ODM services. We can cover even from medium to small business, factory & industrial, military & government, home office & personal use.

## **SPECIFICATION**

### **KEYBOARD & MOUSE**

Keyboard	100 Keys, Detachable
	Multiple Languages Option
Compatible	Win/Sun/Unix/Linus/Mac
Mouse	Touchpad
Mouse Resolution	>1000 dots/inch (40×40/mm)
MTBF	1,000,000 Press

## KVM SWITCH MODULE

Direct PC connection	08
Maximum PC Connection	256
Port Selection	OSD, Button, Hot Key, IP (Opt)
Console Connector	DB-37 Pins
KVM Connector	RJ-45 Female x 08
Power	DC Jack
Switch button	Panel Digital Keys
Reset Switch	Panel Function Keys
Status LEDs	Nixie Tube (Selected Port)
	Red led (Online Port
Server Interface	PS/2 , USB
Cascadable	Support

## LCD MONITOR

Size / Ratio	17" / 4:3
Video	SXGA TFT – LCD
Visible Square	337.92 H x 270.336 V
Resolution	1280 x 1024 @ 60Hz (Optimal)
	1920 x 1200 @ 60Hz (Max)
Color	16.7 Mil. , RGB 6bit + Hi_FRC
Contrast	1000 : 1 (TyP)
Back light / Brightness	LED / 300 nit (cd/m2)
Pixel Pitch	0.264 x 0.297 mm
MTBF	100,000 hours

#### **CPU MODULE (AC-Dx100L Series)**

Video connection	VGA / DVI / HDMI
Link connection	1 x RJ-45 Female


#### **OPERATIONAL SPECIFICATION**

Operating Temp	-10o C – 50° C
Storage Temp	-20o C – 60° C
Humidity	0-80%RH, No Condensation

#### **PHYSICAL SPECIFICATION**

Housing	Metal
Dimension LCD / KVM	407x445x45 / 148.4x445x45mm
Weight LCD / KVM	6.15 kg / 2.74 kg

#### **CONNECTION DIAGRAM**

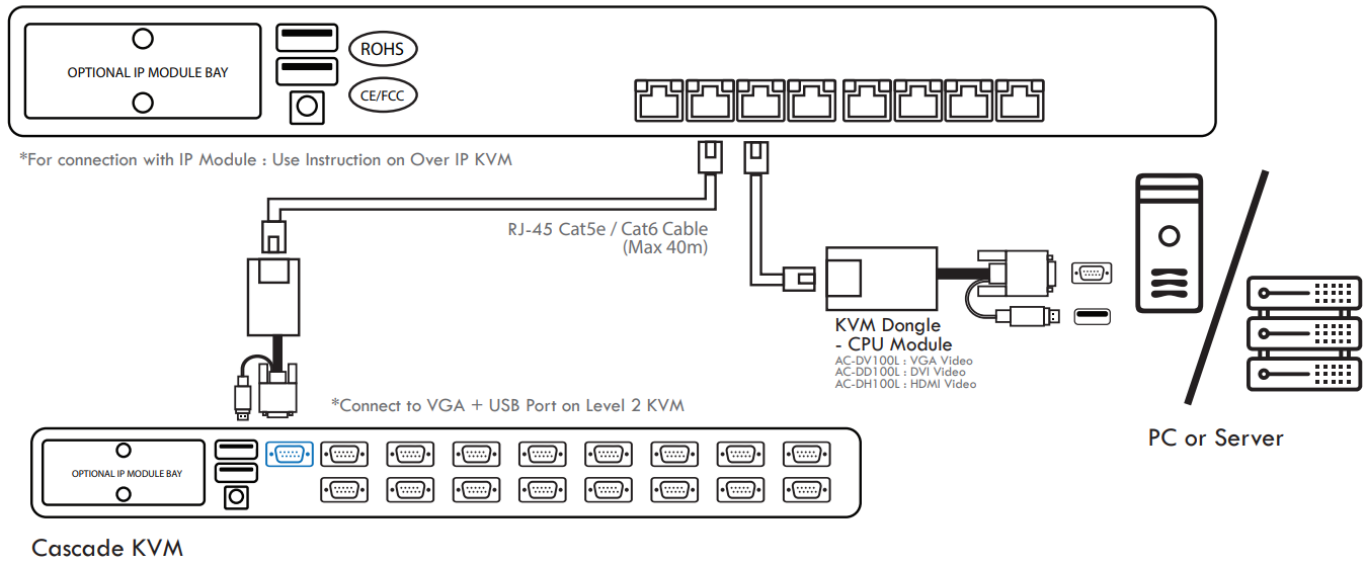

[WWW.ANGUSTOS.COM](http://WWW.ANGUSTOS.COM)



## Documents / Resources



[ANGUSTOS AL-UV708L 8-Port USB CATx Single Rail LCD KVM Switch](#) [pdf] Owner's Manual

AL-UV708L, AL-UV708L 8-Port USB CATx Single Rail LCD KVM Switch, 8-Port USB CATx Single Rail LCD KVM Switch, USB CATx Single Rail LCD KVM Switch, Single Rail LCD KVM Switch, LCD KVM Switch, KVM Switch, Switch

## References

- [ANGUSTOS - The Best Selling IT & Pro AV in USA Market!](#)