



Anolis EMINERE SIDE 1 RGBW Luminaire Owner's Manual

[Home](#) » [ANOLiS](#) » Anolis EMINERE SIDE 1 RGBW Luminaire Owner's Manual 

Anolis[®]

SPECIFICATION SHEET
EMINERE[®] SIDE



Contents

1	EMINERE SIDE 1 RGBW Luminaire
2	KEY FEATURES
3	OPTIC OPTIONS
4	SPECIFICATION
5	DIMENSIONS
6	PHOTOMETRIC OVERVIEW
7	BI-SYMMETRICAL BEAM ANGLES
8	EMINERE SIDE INPUT OPTIONS
9	COLOUR MIXING PRINTS
10	E-BOX SPECIFICATION
11	E-BOX DIMENSIONS
12	CONNECTIVITY
13	CONNECTION
14	THE BOOSTER BOX
15	ACCESSORIES
16	CABLES
17	PHOTOMETRIC DATA
18	PHOTOMETRIC DATA
19	Documents / Resources
19.1	References

EMINERE SIDE 1 RGBW Luminaire

EMINERE® SIDE 1 / 2 / 3 / 4

Eminere Side is specifically designed for applications where a low form factor is required whilst keeping installation of the luminaire neat and clean. With only 76 mm in height, it keeps all of the Eminere series strengths. Wide range of optics options, durability, connectivity, application flexibility make this luminaire ideal solution for flood lighting, wall grazing, wall washing and accent lighting.

KEY FEATURES

Quick and Easy Installation

Easy and quick installation using click-on connectors overmolded on combo cable (Power + Data).

Durability

High durability of IK06 in combination of ingress factor IP67.

Application Flexibility

Complete solution for illuminating buildings, monuments, walls, statues, bridges, coves, arches and much more. With PSU on its side, Eminere Side is only 76 mm in height.

Optics & Colours

Wide range of optics allows to place product anywhere needed with no limitation. Full spectral LEDs selection with custom option on request. Output up to 1.147 lm (RGBW) or 1.652 lm (PW) per one foot of Eminere.

COLOURS

* UPON REQUEST




RGBW



RGBA



Pure
White




Tuneable
White *

CONTROL & PROTOCOLS



OPTIONAL




OPTIONAL



PW & SINGLE
COLOR
ONLY

STANDARD & SPECIFICATION



Warranty
with
Registration



Vibration
Standard
for Bridge

FINISH OPTIONS


* CLOSEST RAL TONE

* HE = Harsh Environment




COLOUR TEMPERATURE

* UPON REQUEST

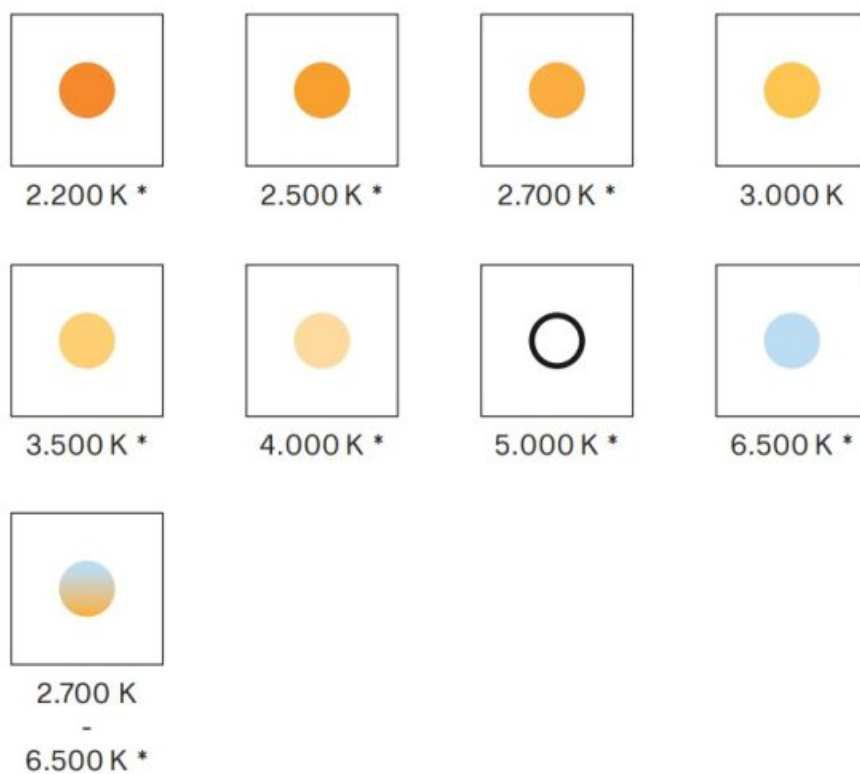


OPTIC OPTIONS


SYMMETRICAL

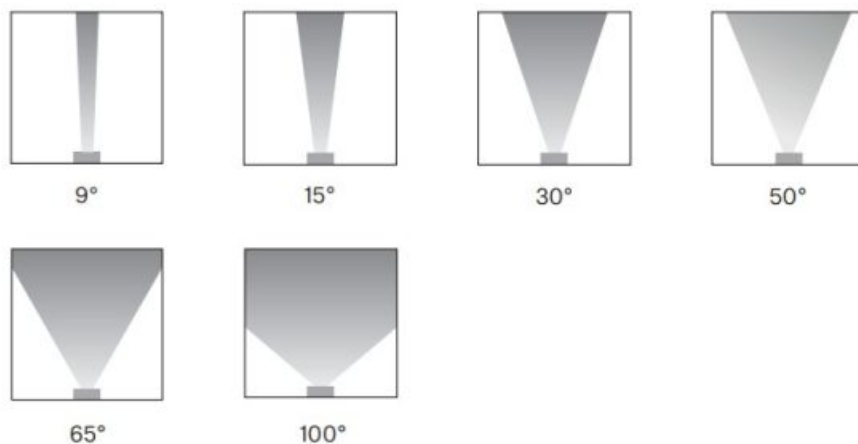

BI-SYMMETRICAL

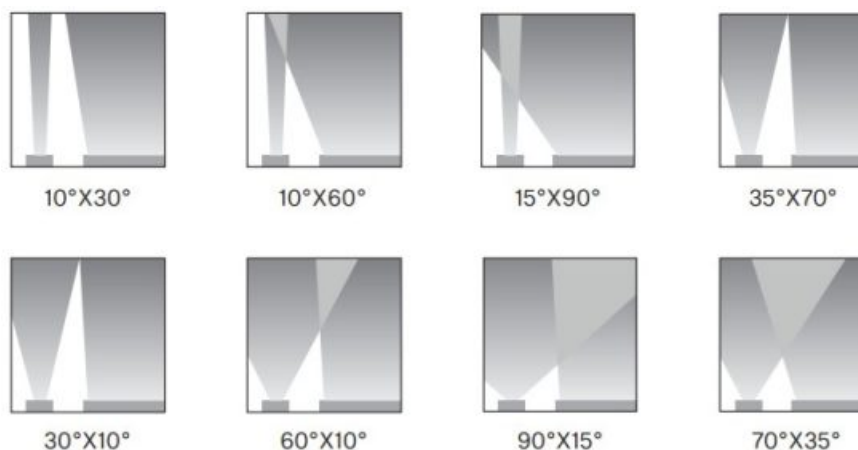

ASYMMETRICAL

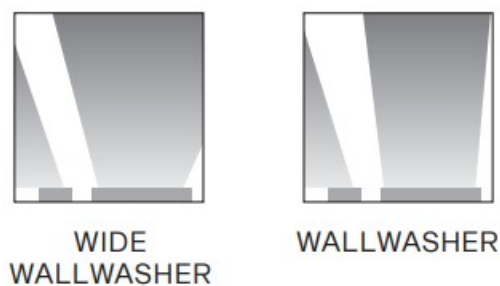


SPECIFICATION

ELECTRICAL	Input Voltage	120 – 277 V AC 50/60 Hz		
	Typical Power Consumption	Eminere Side 1 / 2 / 3 / 4	25 W / 45W / 65W / 85W	
	Light Source	Eminere Side 1 / 2 / 3 / 4	12, 24, 36. 48 x High Power Single Chip LEDs	
	Colour Variants	RGBW (W – 6.500 K)	RGBA	PW (W – 3.000 K)
		Variants On Request (TW (2700 – 6500 K), 2.200 K 2.500 K 2.700 K 3.500 K 4.000 K 5.000 K 6.500 K)		

OPTICAL	Beam Angle	Symmetrical:	9° 15° 30° 50° 65° 100°			
		Bi-symmetrical:	10° x 30° 30° x 10° 10° x 60° 60° x 10° 35° x 70° 70° x 35° 15° x 90° 90° x 15°			
		Asymmetrical:	Wallwasher 1 Wide Wallwasher			
	Lumen Output Delivered	Eminere Side 1: 1.147 lm, RGBW @ 9°		Eminere Side 3: 3.441 lm, RGBW @ 9°		
		Eminere Side 2: 2.294 lm, RGBW @ 9°		Eminere Side 4: 4.588 lm, RGBW @ 9°		
	Projected Lumen Maintenance	L90B10 >90.000 hrs, Ta = 25°C / 77°F				
CONTROL	Interface Protocol	Via E-Box range, Wireless DMX (excluded Eminere Side 1) or ON/OFF (PW & single color only, No dimming)				
	E-Box Control Protocols	USITT DMX512, RDM, ArtNet, MA Net, MA Nett, sACN, Kling-Net				
	Wireless DMX (Option)	Lumen Radio CRMX Technology				
	Operating Modes	Pixel (12 LEDs/300mm) or Fixture mode				
	Setting / Addressing	Via Two Row LCD Display with Control Buttons or RDM communicator				
	Power Supply	Integrated				
	Connectivity	E-box Lite 1 E-box Daisy	127 of Eminere Side 1 (@ 230 V and 30m cable) via 1 Output			
E-box Star		127 of Eminere Side 1 (@ 230 V and 30m cable) via 6 Outputs				
PHYSICAL	Width x Height x Length	1/2/3/4	148 x 76 x 329 / 629 / 929 / 1229 mm 1 5.82 x 2.99 x 12.95 / 24.76 / 36.57 / 48.38 in.			
	Weight	2.95 kg / 6.5 lbs	4.75 kg /10.47 lbs	7 kg /15.43 lbs	8.92 kg /19.67 lbs	
	Housing	High Pressure Extruded Aluminium Body End Caps – Die-Cast Aluminium Tempered Glass				
	Finish Options	Standard Colour	Graphite Black RAL 9011 1 Grey Aluminium RAL 9007 Pure White RAL 9010 ‘Sandstone RAL 1014			
		Standard Colour Harsh Environment	Graphite Black RAL 9011 1 Grey Aluminium RAL 9007 Pure White RAL 9010 ‘Sandstone RAL 1014			
		Cost Option	Custom RAL			
	Cables/Connections	IP67 Hybrid Connection (Power + Data)				
	Mounting Method	Surface Mount With Different Type of Brackets				
	Adjustability	-105° / +15°				
	Protection Factor	IP67 / Suitable For Wet Locations				
	IK Rating	IK06				

	Cooling System	Convection	
	Operating Ambient Temperature	-20 °C / +50 °C (-4 °F / +122 °F)	
	Operating Temperature	+67 °C @ Ambient +50 °C (+153 °F @ Ambient +122 °F)	
CERTIFICATION	Listings	ETL / cETL, CE, RoHS, UKCA	
ACCESSORIES	Not Included Items		
	Mounting Brackets	Mounting Brackets 50 100 200 300 mm Custom length	
	Shields	Shield For Eminere Side 1 2 3 4	
	Barndoors	Barndoor (with or without Side Covers) for Eminere Side 1 2 3 4	
	Cables and Connectors	Field Installable Connector FF	Field Installable Connector FM
		Cable CE WCA	Cable US WCA
		Waterproof Cover Cap FM ZAHB- 0006	
		CE/UL Leader Cables FF for Eminere FF 2 5 10 25 50m	
		CE/UL Jumper Cables FF/FM for Eminere FF/FM 0,25 0,5 1 2 3 5 10m	
	Booster Box	Booster Box	

DIMENSIONS

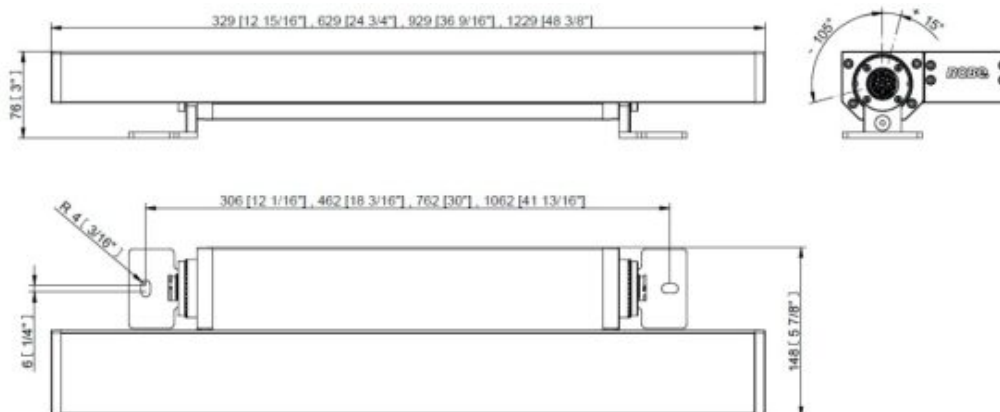

PROJECTED AREA

	Front (rear) – m2	Front (rear) f t2	Side – m2	Side – ft2	Top – m2	Top – ft2
Eminere Side 1 with Shield	0,024 0,041	0,258 0,441	0,007 –	0,075 –	0,050 0,051	0,538 0,549
Eminere Side 2 with Shield	0,041 0,074	0,441 0,796	0,007 –	0,075 –	0,084 0,085	0,904 0,914
Eminere Side 3 with Shield	0,063 0,111	0,678 1,194	0,007 –	0,075 –	0,129 0,131	1,388 1,409
Eminere Side 4 with Shield	0,115 0,150	0,925 1,614	0,007 –	0,075 –	0,173 0,175	1,861 1,883

PHOTOMETRIC OVERVIEW


Based on RGBW version, all leds @ full

Lumen Output (lm)


	EMINERE SIDE 1	EMINERE SIDE 2	EMINERE SIDE 3	EMINERE SIDE 4
9°	1 147	2 294	3 441	4 588
15°	978	1 956	2 910	3 912
30°	1 046	2 092	3 138	4 184
50°	1 039	2 078	3 117	4 156
65°	1 040	2 080	3 120	4 160
100°	996	1 992	2 988	3 984
10° x 30°	1 032	2 064	3 096	4 128
10° x 60°	1 051	1 874	2 811	3 748
15° x 90°	970	1 940	2 934	3 880
35° x 70°	1 040	2 080	3 120	4 160
WallWasher	952	1 904	2 856	3 806
Wide WallWasher	854	1 708	2 562	3 416

BI-SYMMETRICAL BEAM ANGLES


Bi-symmetrical: 10°x30°, 10°x60°, 35°x70°, 15°x90°

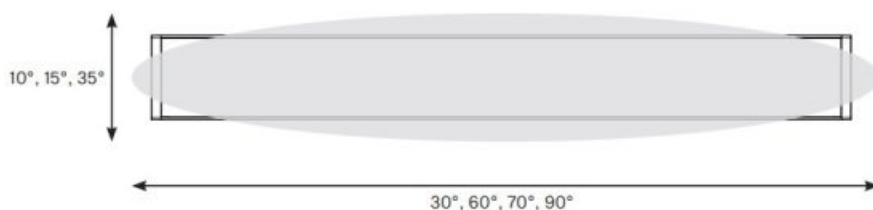

Bi-symmetrical: 30°x10°, 60°x10°, 70°x35°, 90°x15°

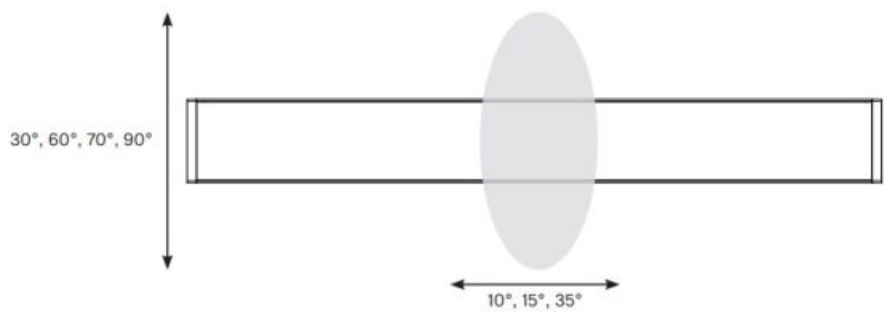


EMINERE SIDE INPUT OPTIONS

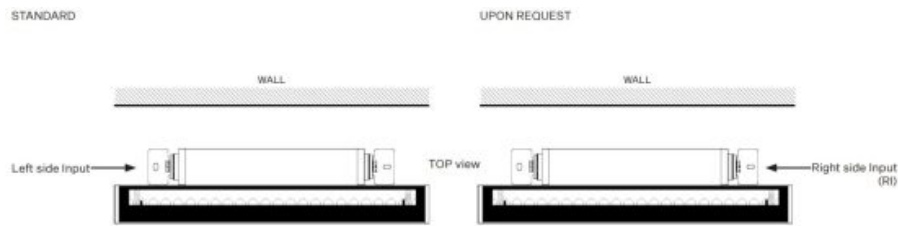

Note: Applies for all optic versions.


COLOUR MIXING PRINTS

STAND ALONE	Specially designed glass printing to achieve optimal colour mixing and intensity distribution.
HEAD2HEAD	Fixtures without special end glass print installed right next to each other create absolutely perfect colour and intensity overlap.

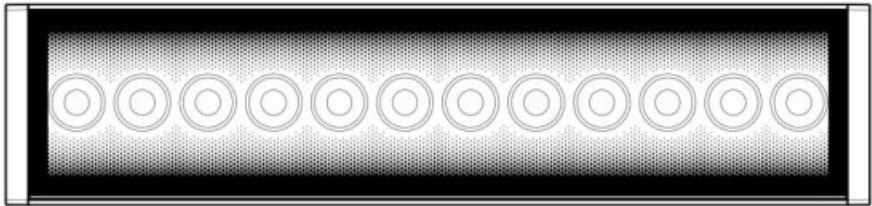


HEAD2HEAD

SYMMETRICAL

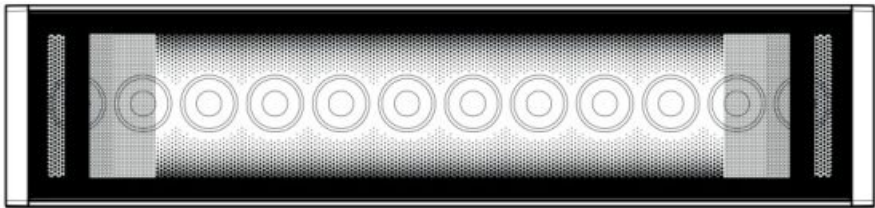


STAND ALONE

WALLWASHER

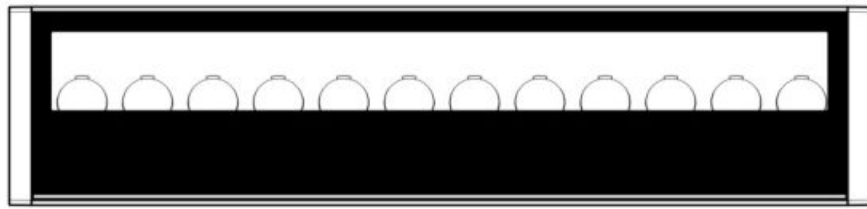

HEAD2HEAD

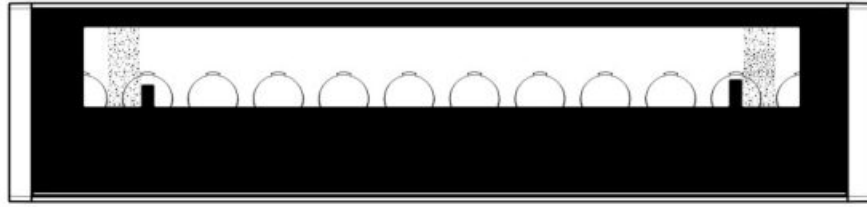

STAND ALONE

Note: Applies for RGBW, RGBA versions. Pure white and Tunable white versions are always without the end print (no matter on their position to other fixture).

E-BOX SPECIFICATION


ELECTRICAL	Input Voltage	120 — 277 V AC 50/60 Hz		
CONTROL	Wireless DMX (Option)	Lumen Radio CRMX Technology		
	Interface Protocol	E-box Lite: USITT DMX512, RDM		
		E-box Daisy / Star: USITT DMX512, RDM, ArtNet, MA Net, MA Net2, sACN, Kling-Net		
	Operating Modes	E-box Lite / Daisy: Fixture Mode, Pixel Mode. Output Mode		
		E-Box Star: Total Mode, Fixture Mode, Pixel Mode, Output Mode		
	Display	Via Two Row LCD Display with Control Buttons or RDM communicator		
	Control System	E-box With Self Addressing Feature or Custom Setting Via LCD Display/RDM		
	Power Supply	Integrated		
	Connectivity	E-box Lite	127 of Eminere Side 1 (@ 230 V and 30m cable) via 1 Output	
		E-box Daisy	127 of Eminere Side 1 (@ 230 V and 30m cable) via 1 Output	
		E-box Star	127 of Eminere Side 1 (@ 230 V and 30m cable) via 6 Outputs	
PHYSICAL	Length x Width x Height	E-box Lite	220 x 120 x 81 mm (8.66 x 4.72 x 3.18 in.)	
		E-box Daisy	260 x 160 x 91 mm (10.24 x 6.30 x 3.58 in.)	
		E-box Star	280 x 230 x 111 mm (11.02 x 9.06 x 4.37 in.)	
	Weight	1.67 kg 3.85 lbs	2.78 kg 6.13 lbs	4.4 kg 9.7 lbs
	Housing	Die-Cast Aluminium Case		
	Finish Options	Standard Colour – Graphite Black (RAL 9011) Silver (RAL 9006)		
		Cost Option – Custom RAL Harsh Environment (RAL 9016. RAL 9011)		
	Cables / Connections	Cable Grommet (stainless steel)		
	Mounting Method	Surface Mount , 4 Mounting Holes		
	Protection Factor	IP67 / Suitable For Wet Locations		
	IK Rating	IK10		
	Cooling System	Convection		
	Operating Ambient Temperature	-20 °C / +40 °C (-4 °F / +104 °F)		
CERTIFICATION	Listings	ETL / cETL, CE. RoHS, UKCA		

COMPARISON


	E-BOX LITE	E-BOX DAISY	E-BOX STAR
Power input	1	1	1
Fixture Output	1	1	6
Total load (current)	16A	16A	16A
DMX control	YES	YES	YES
RDM	YES	YES	YES
Art-Net	NO	YES	YES
Ethernet switch	NO	YES	YES
Kling-Net	NO	YES	YES
sACN	NO	YES	YES
MA Net, MA Net2	NO	YES	YES

E-BOX DIMENSIONS


E-BOX LITE

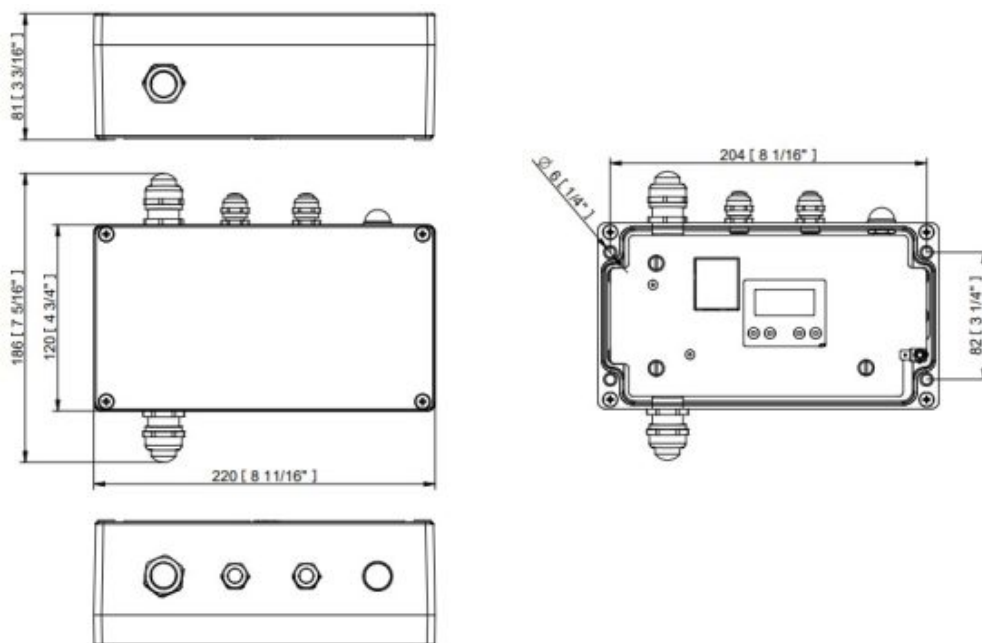

E-BOX DAISY

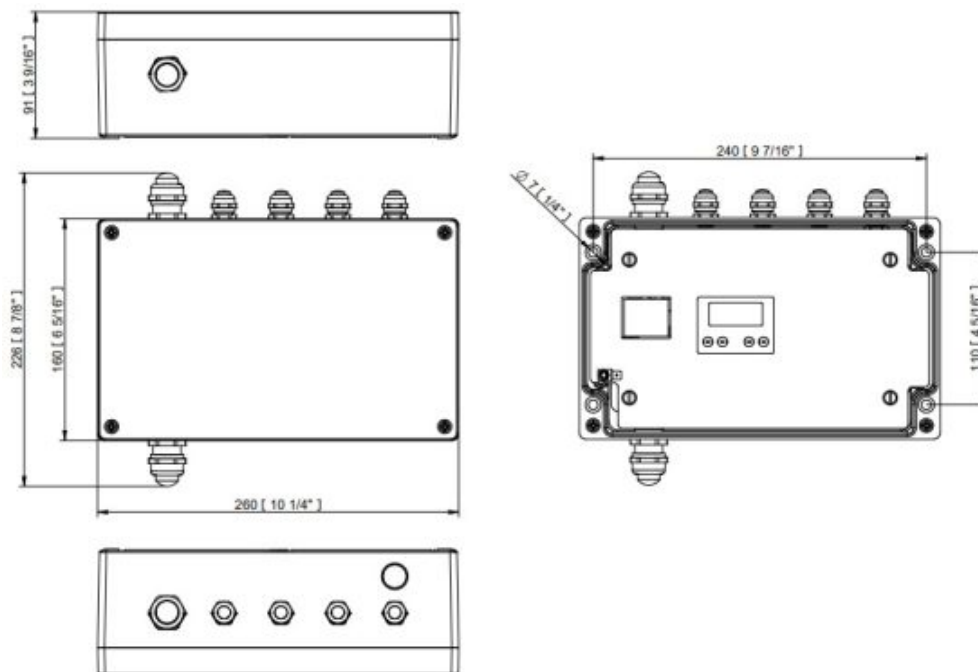

E-BOX STAR

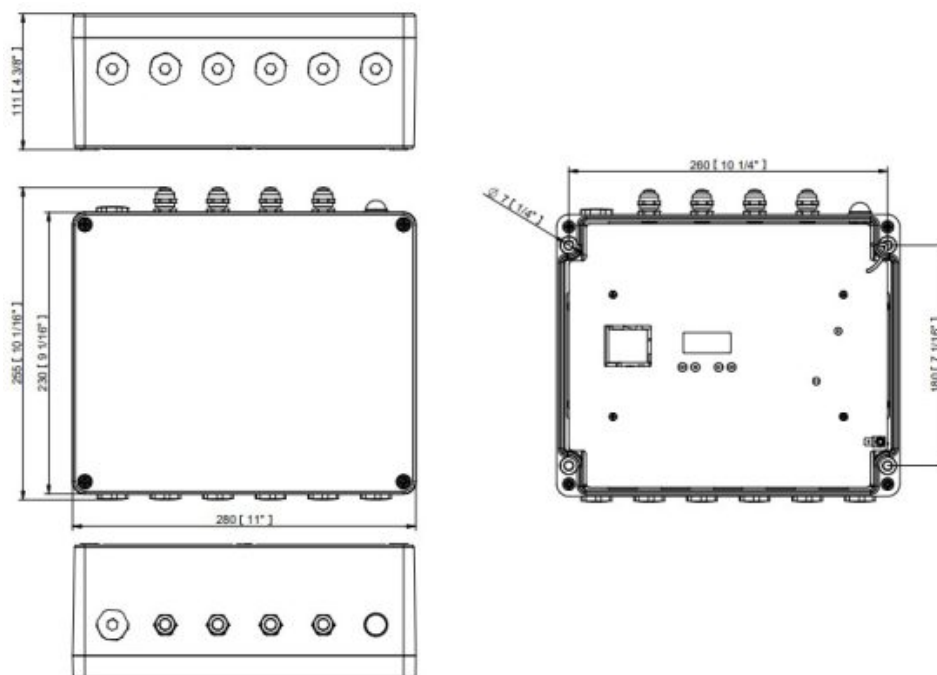


CONNECTIVITY

The tables below state max. theoretical number of Emineres connected to the one LED output of the E-box without using Booster boxes.

Cable length (m)		Voltage (V)			
		120	190	230	277
	10	66	104	127	152
	20	66	104	127	152
	30	46	104	127	152
	50	28	70	102	148
	70	20	50	73	106
	100	13	35	51	74
EMINERE 1	200	7	17	25	37
	10	36	56	69	83
	20	36	56	69	83
	30	24	56	69	83
	50	15	38	56	80
	70	10	27	40	57
	100	9	18	28	40
EMINERE 2	200	3	9	16	20


Cable length (m)		Voltage (V)			
		120	190	230	277
	10	25	40	48	59
	20	25	40	48	59
	30	17	40	48	59
	50	11	26	39	57
	70	7	19	28	40
	100	5	13	19	28
EMINERE 3	200	2	6	10	14
	10	19	31	37	45
	20	19	31	37	45
	30	14	31	37	45
	50	8	20	30	44
	70	5	15	21	35
	100	3	10	15	21
EMINERE 4	200	1	4	7	11

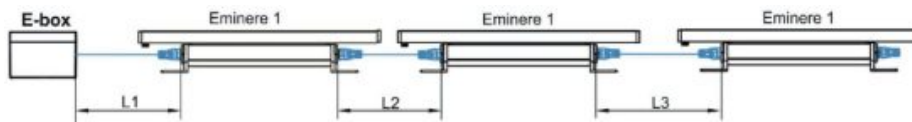


Note: Cable length is a total cable length between E-box and last connected Eminere. Example: Total cable length= $L1+L2+L3$.
For more information see User Manual.

CONNECTION

E-BOX LITE / DAISY

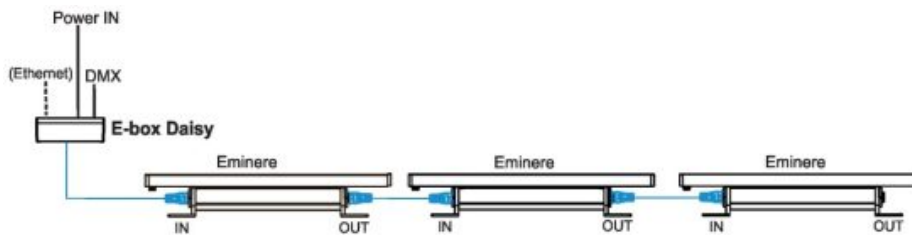


E-BOX STAR

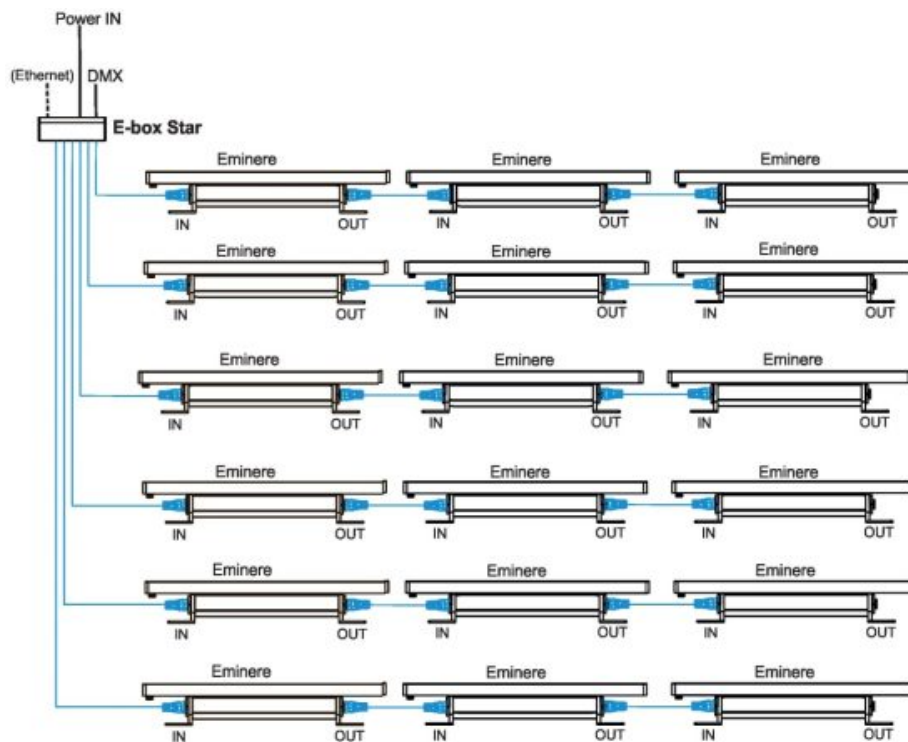

CONNECTION – WIRELESS VERSION


Connection setup, where every Eminere is independently accepting data from WIFI.

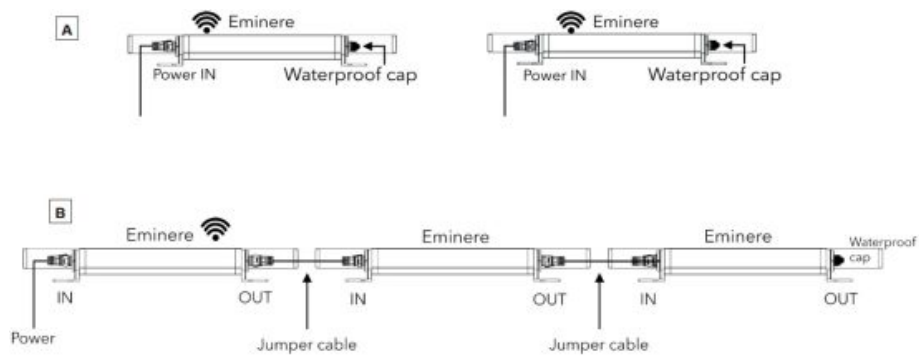

CONNECTION – ON / OFF VERSION

A

1. Junction Box for Calumma or by Others
2. CE/UL Leader Cables FF for Eminere FF 2 | 5 | 10 | 25 | 50 m
3. CE/UL Jumper Cables FF/FM for Eminere FF/FM 0,25 | 0,5 | 1 | 2 | 3 | 5 | 10 m
4. Booster Box
5. Waterproof Cap

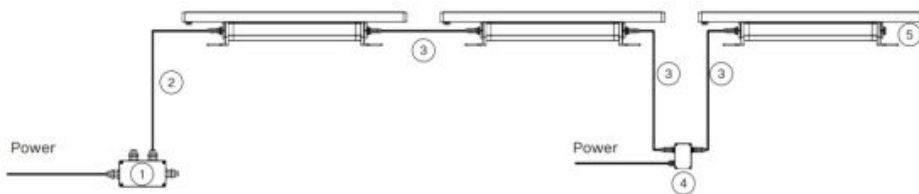


B

1. Power Cable (by Others)
2. Field Installable Connector FF (13053003)
3. Field Installable Connector FM (13053004)
4. Waterproof Cap




THE BOOSTER BOX

To compensate a voltage drop in a large installation, the Booster boxes have to be connected in the chain of Eminere modules.

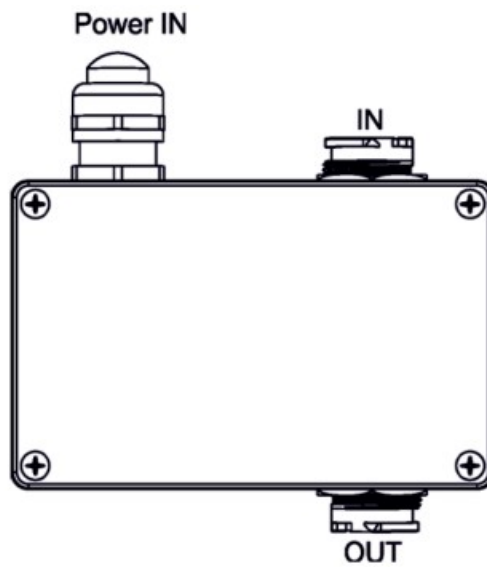


Example: E-box Daisy, Power supply= 230V, Cable length=70m, fixture-Eminere 2.

The Booster box has to be connected after every 45th Eminere 2 (fix-ture 45 and fixture 90) from 94 fixtures.

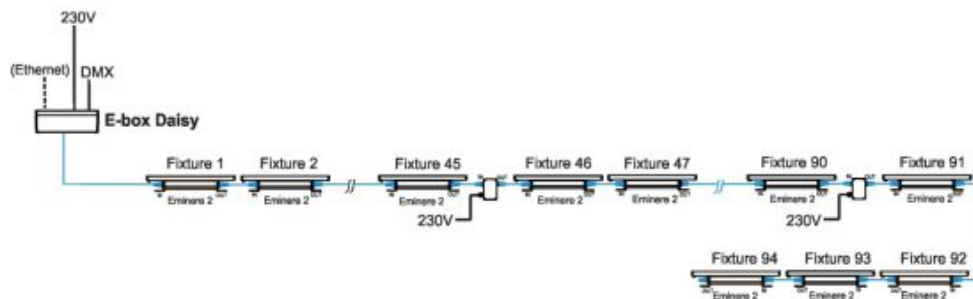

DIMENSIONS

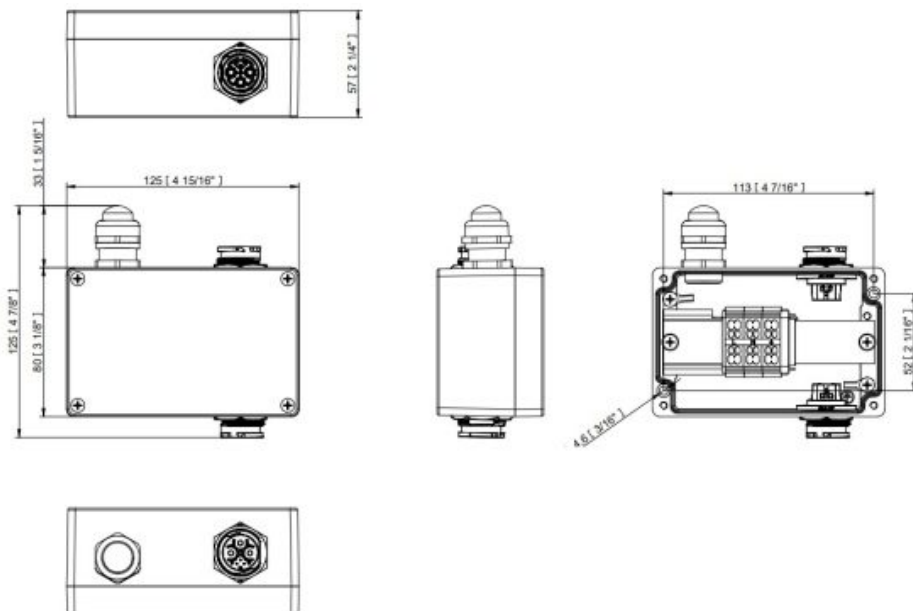


BOOSTER BOX POSITIONS

Cable length (m)		Max. number of Emineres 1=191 (in Standard mode)			
		120 V	190 V	230 V	277 V
EMINERE 1	10 m	66,132	104	127	—
	20 m	66,132	104	127	—
	30 m	46,92,138	104	127	—
	50 m	28,56,84,112,140	70,140	102	148
	70 m	20,40,60,80,100,120,140	50,100,150	73,146	106
	100 m	13,26,39,52,65,78,91,104,117,130,143	35,70,105,140	51,102	74,148
	200 m	7,14,21,28,35,42,49,56,63,70,77,84,91,98,105,112,119,126,133,140,147	17,34,51,68,85,102,119,136	25,50,75,100,125,150	37,74,111,148


Note: For more detail see the User manual.

ACCESSORIES


Shield for Eminere side

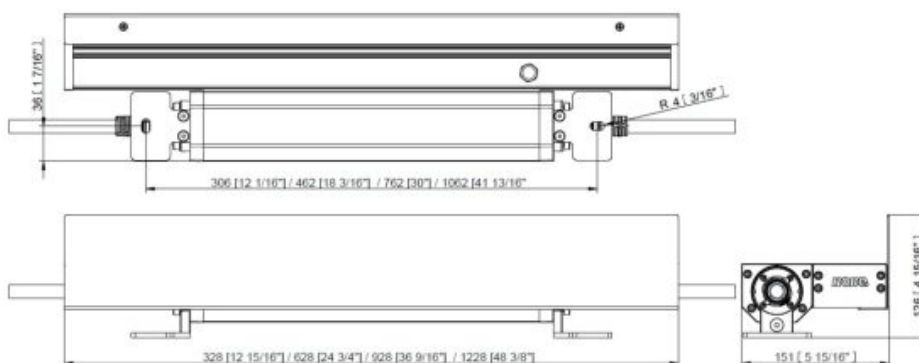


Mounting Brackets for Eminere Side

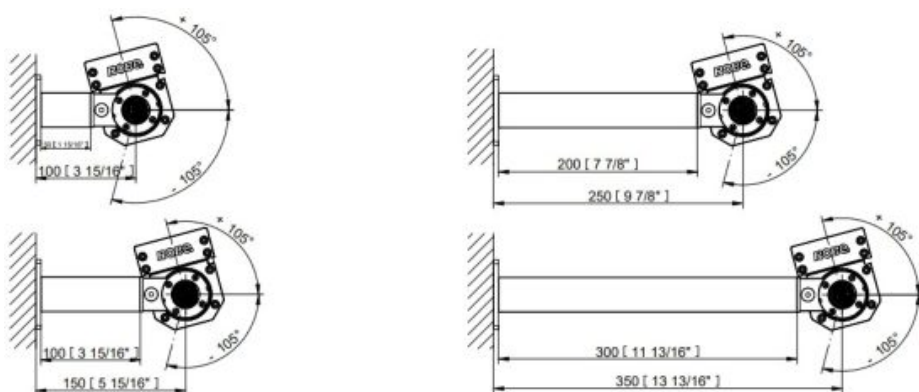

Barndoor without side cover

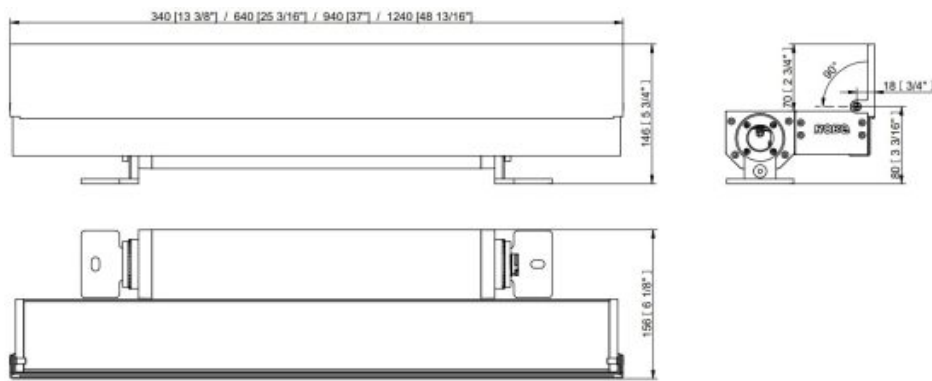

Barndoor without side cover

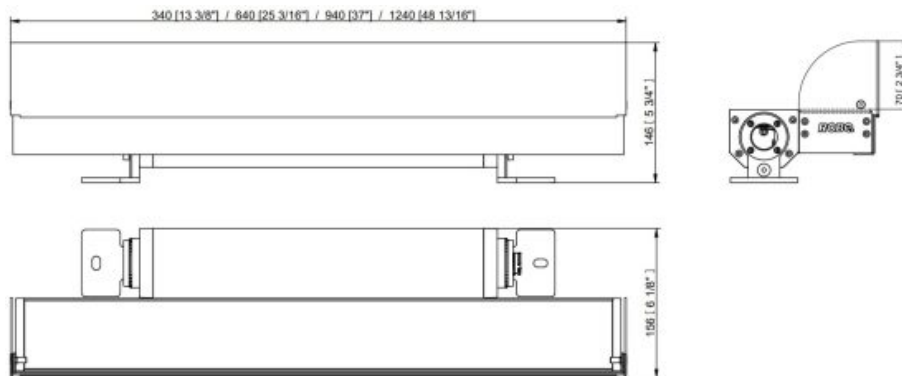


CABLES

Leader Cable

For connecting E-Box with first Eminere. Comes with Waterproof End Cap which has to be installed to the last Eminere's output connector.

Female connector
Female pins

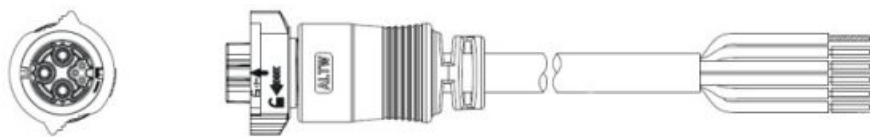

Jumper Cable


For connection between two Emineres.

NOTE: Custom length of Jumper cable depends on the distance between two Eminere luminaires (length includes cable and connectors).




Field installable connector

For special cases, where Jumper Cable can't be used. Then use Leader Cable with Field installable connector to make a connection between Emineres.

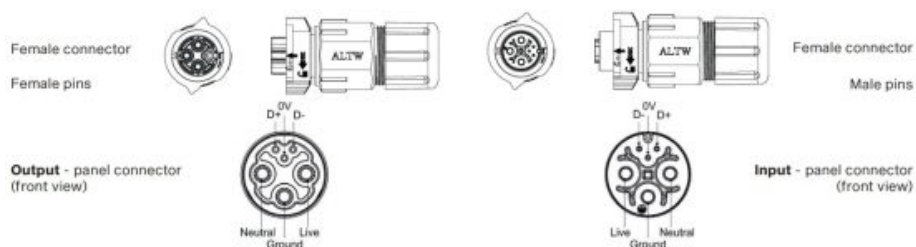

Waterproof End Cap

Install at the end of line to the last Emineres output connector.

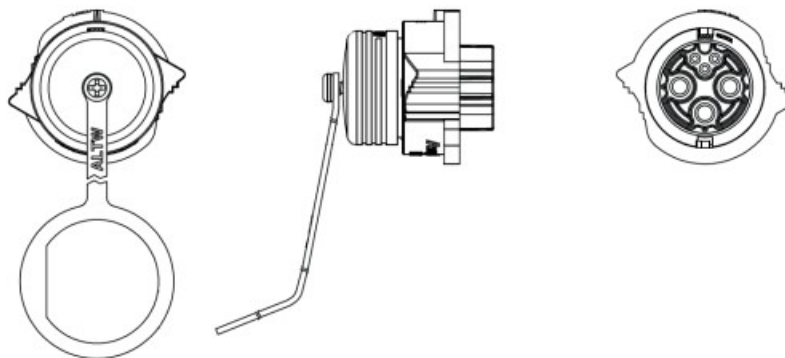





Cable lengths available

IN METRES	LEADER CABLE	JUMPER CABLE
0,25	—	YES
0,5	—	YES
1	—	YES
2	YES	YES
3	—	YES

IN METRES	LEADER CABLE	JUMPER CABLE
5	YES	YES
10	YES	YES
25	YES	—
50	YES	—
Other lengths	On Request	





PHOTOMETRIC DATA

Eminere Side 4 RGBCW 9dg	Eminere Side 4 RGBCW 15dg
--------------------------	---------------------------

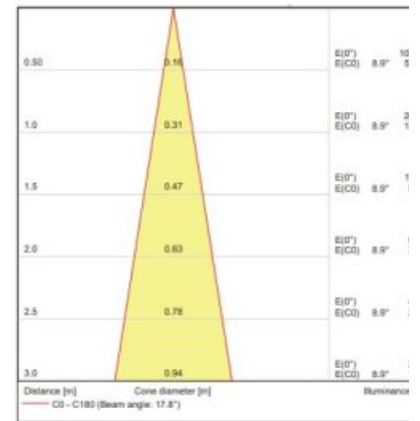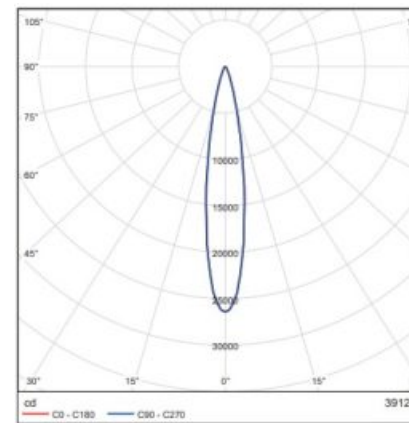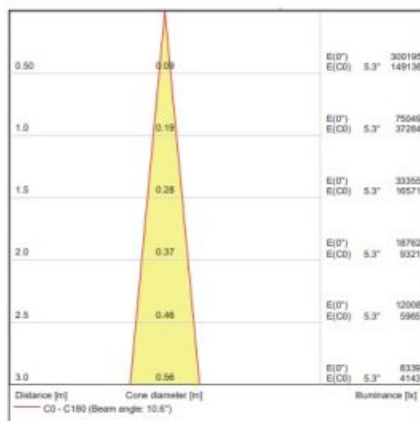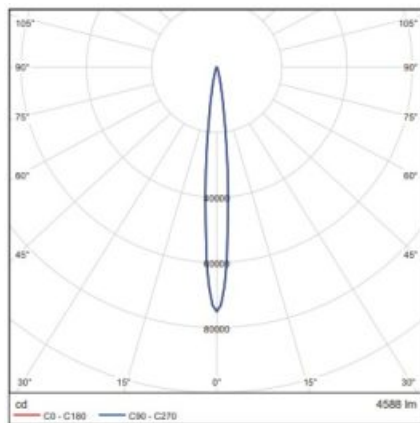





Eminere Side 4 RGBCW 30dg

Eminere Side 4 RGBCW 50dg

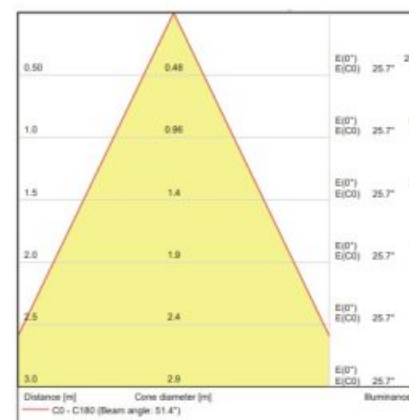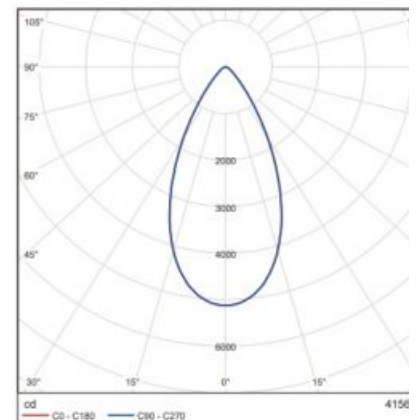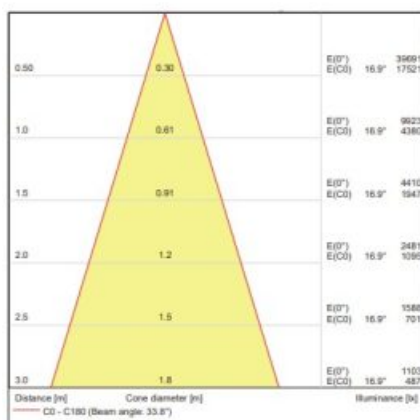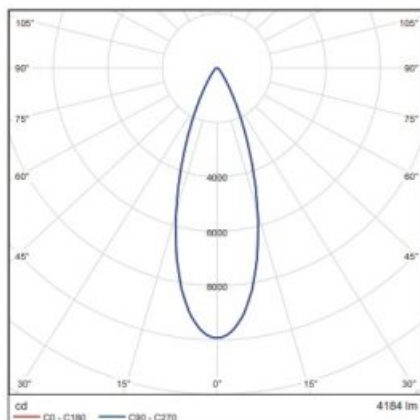

Eminere Side 4 RGBCW 65dg


Eminere Side 4 RGBCW 100dg

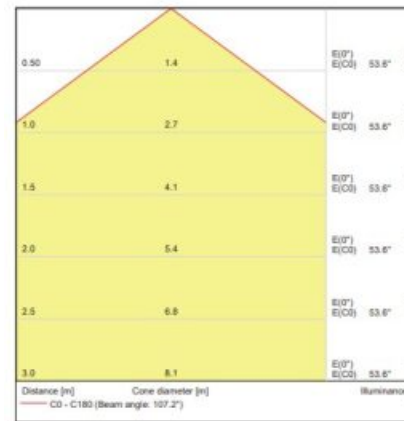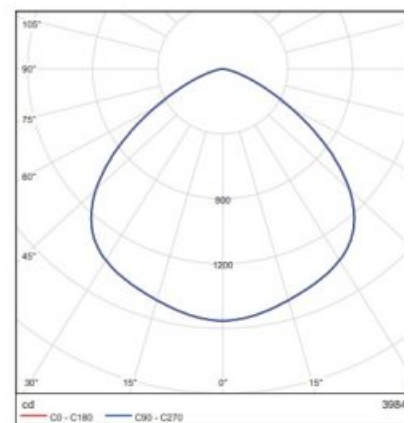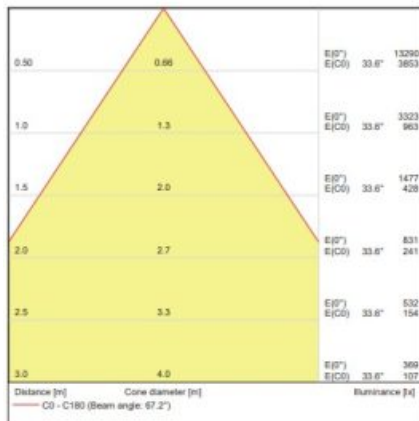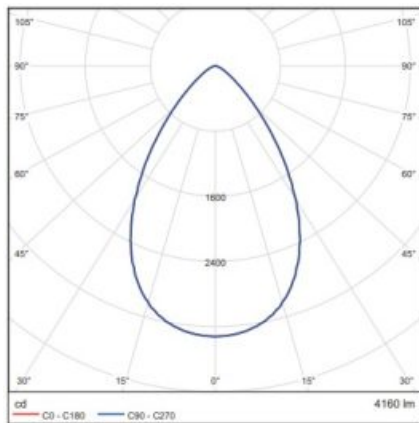


PHOTOMETRIC DATA

Eminere Side 4 RGBCW 10dg x 30 dg



Eminere Side 4 RGBCW 10dg x 30 dg

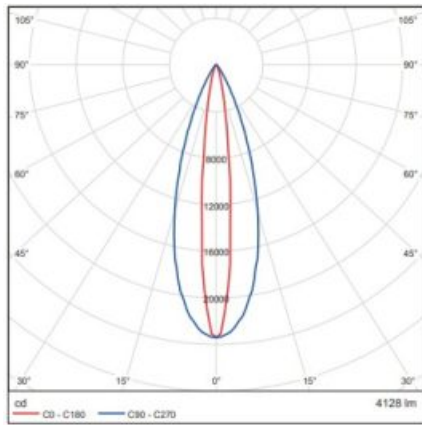



Eminere Side 4 RGBCW 35dg x 70dg

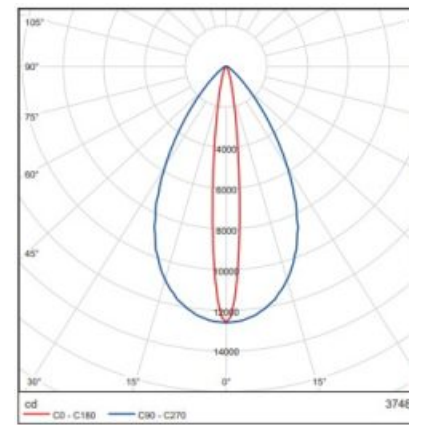



Eminere Side 4 RGBCW 15dg x 9

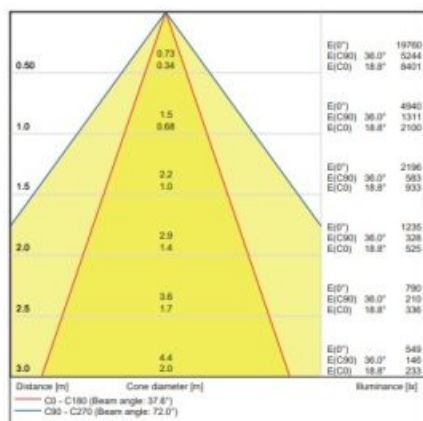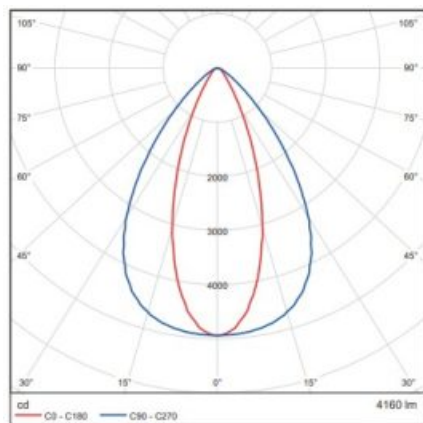

Eminere Side 4 RGBCW WallWasher

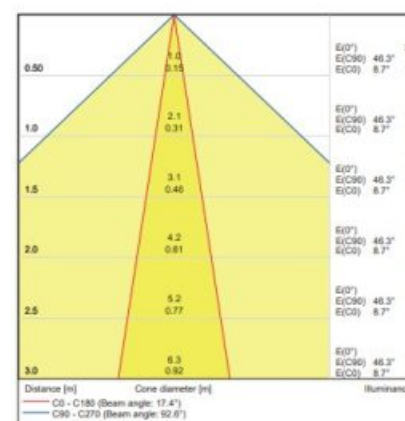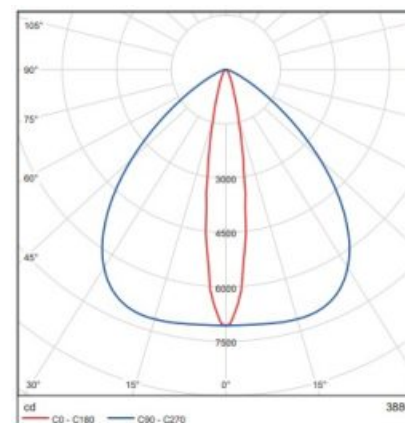

Eminere Side 4 RGBCW Wide WallWasher

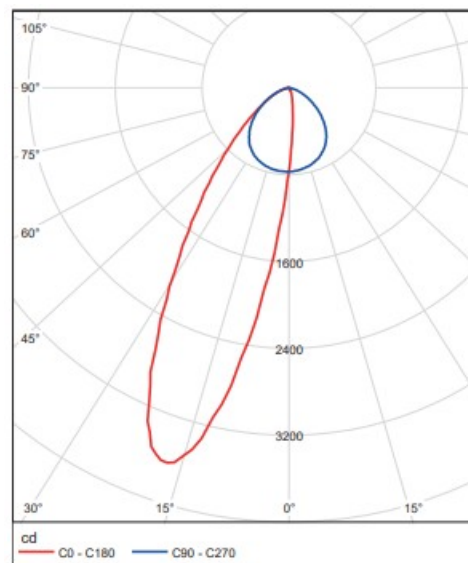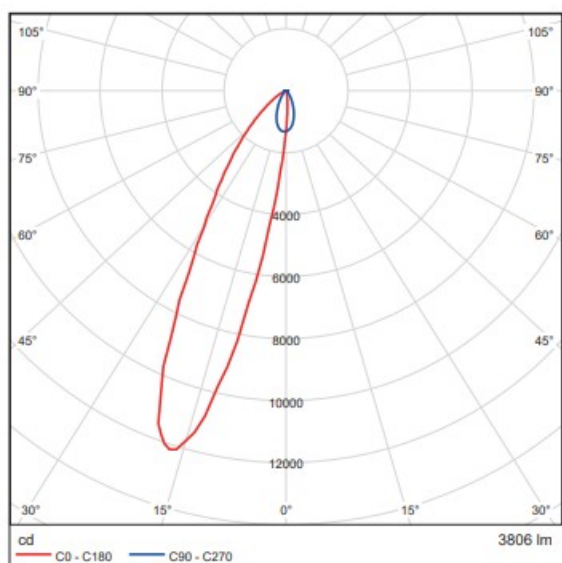

ROBE lighting s. r. o. | Palackeho 416
757 01 Valasske Mezirici
Czech Republic | Tel.: +420 571 751 500
E-mail: info@anolis.eu
www.anolislighting.com
VERSION 8.6 / 10_2024



This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.