



anslut 008731 Work Lamp Instruction Manual

[Home](#) » [anslut](#) » anslut 008731 Work Lamp Instruction Manual 

Contents


- [1 anslut 008731 Work Lamp](#)
- [2 INSTALLATION](#)
- [3 SAFETY INSTRUCTIONS](#)
- [4 TECHNICAL DATA](#)
- [5 DESCRIPTION](#)
- [6 USE](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

The logo for anslut, featuring the word "anslut" in a bold, black, sans-serif font, set against a yellow rectangular background.

anslut 008731 Work Lamp



INSTALLATION

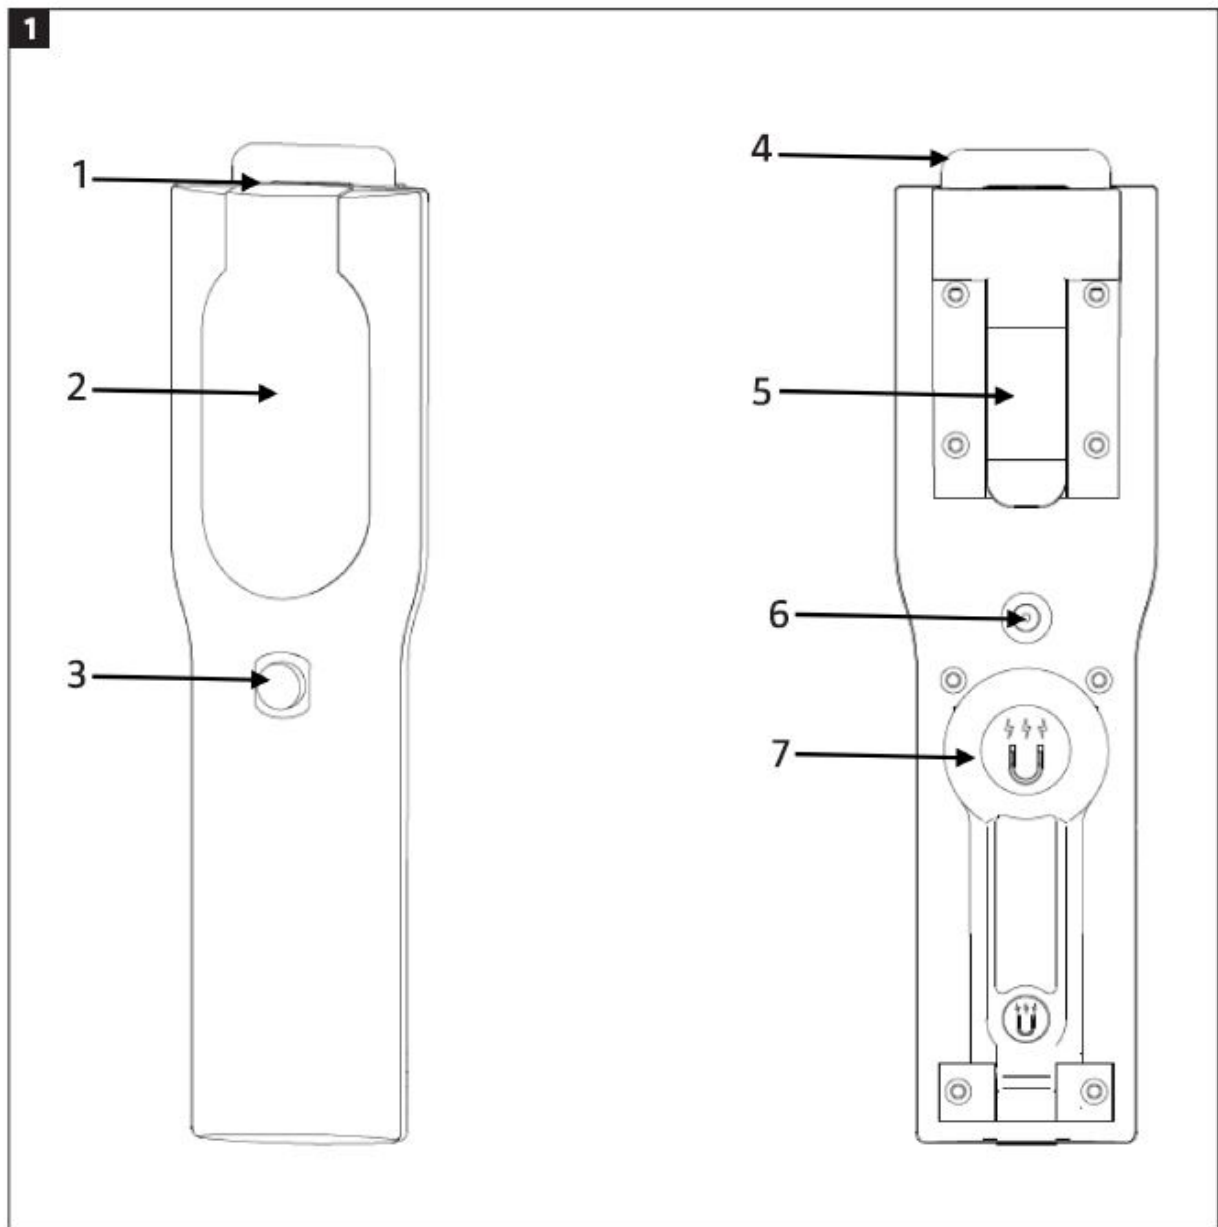

SAFETY INSTRUCTIONS

- Do not look directly into the light when it is switched on.
- Never point the beam at the eyes of people or animals.
- Store out of the reach of children.
- Can be used indoors and outdoors, but do not immerse in water or any other liquid.
- Do not charge the product outdoors -this will not comply with protection rating IP65.
- The switch must be in the off position during charging, otherwise this can damage the light.
- Never cover the lens or reflector when in use.
- Do not attempt to replace the battery.
- The product must be discarded if the glass front is cracked.
- The LED light source is not replaceable. When the light source has reached the end of its useful life the complete product must be replaced.

SYMBOLS

- Read the instructions
- Approved in accordance with the relevant directives.
- Recycle discarded product in accordance with local regulations

TECHNICAL DATA

- Battery 3.7 V/4400 mAh
- Output 5/1 W
- Protection rating IP54
- Luminous flux 500/100 lm
- Charging time Approx. 5 h
- Run time Max 3.5/12 h
- Operating temperature -10-40°

DESCRIPTION

1. Car spotlight
2. Main spotlight
3. Switch
4. Hook (rotational 360 °)
5. Clips
6. Charging connector
7. Magnetic mount (adjustable 90 °) FIG. 1

USE


HOW TO USE


Press the switch to switch on and off.

CHARGING THE BATTERY

- The battery must be charged before using for the first time.
- Connect the charger to the charging connector.
- The battery charge status is shown when the indicator is red. When the battery is fully charged the indicator goes green.
- The battery should be charged every three months to maintain its capacity.

Documents / Resources


008731



1 **Introduction**

1.1 **General information**

1.2 **Technical data**

1.3 **Accessories**

1.4 **Assembly**

1.5 **Operation**

1.6 **Maintenance**

1.7 **Disposal**

2 **Installation**

2.1 **General information**

2.2 **Mounting**

2.3 **Operation**

2.4 **Adjustment**

2.5 **Disposal**

[anslut 008731 Work Lamp](#) [pdf] Instruction Manual
008731, Work Lamp