



anslut 008732 Work Lamp Instruction Manual

[Home](#) » [anslut](#) » anslut 008732 Work Lamp Instruction Manual 

Contents

- [1 anslut 008732 Work Lamp](#)
- [2 SAFETY INSTRUCTIONS](#)
- [3 SYMBOLS](#)
- [4 TECHNICAL DATA](#)
- [5 DESCRIPTION](#)
- [6 HOW TO USE](#)
- [7 CHARGING THE BATTERY](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)






anslut 008732 Work Lamp



SAFETY INSTRUCTIONS

- Do not look directly into the light when it is switched on.
- Never point the beam at the eyes of people or animals.
- Store out of the reach of children.
- Can be used indoors and outdoors, but do not immerse in water or any other liquid.
- Do not charge the product outdoors-this will not comply with protection rating IP65.
- Do not use the charger to charge other products.
- Only use the supplied charger to charge the lamp.
- The switch must be in the off position during charging, otherwise this can damage the light.
- Never cover the lens or reflector when in use.
- Do not attempt to replace the battery.
- The product must be discarded if the glass front is cracked.
- The LED light source is not replaceable. When the light source has reached the end of its useful life the complete product must be replaced.

SYMBOLS


	Read the instructions before use.
	Approved in accordance with the relevant directives.
	Recycle discarded product in accordance with local regulations.

TECHNICAL DATA

- Battery: 3.7 V/5000 mAh
- Output: 10/3 W
- Protection rating: IP54
- Luminous flux: 1000/220 lm
- Colour temperature: 6500 K
- Charging time: Approx. 4 h
- Run time: Max3/10 h
- Operating temperature: -10-40° C

DESCRIPTION

1. Car spotlight
2. Main spotlight
3. Charger stand
4. Micro USB port
5. Battery indicator
6. Hook (rotational 360°)
7. Micro USB port
8. Switch
9. Battery indicator
10. Magnetic mount (swivels 90°)

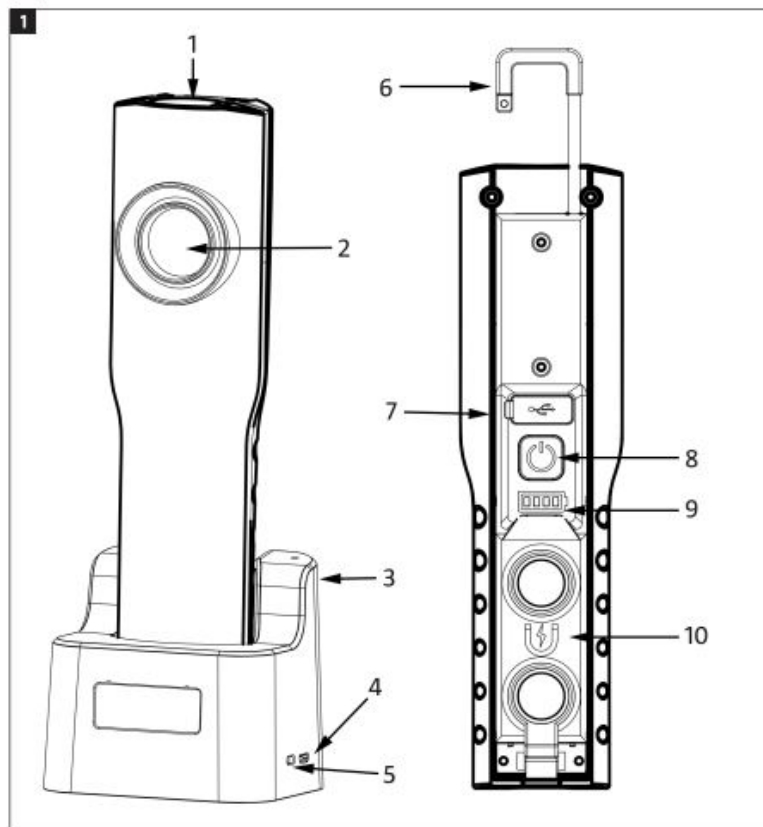

HOW TO USE

Press the switch to switch on and off. The following functions by pressing the switch:

Number of times	Function
	Main spotlight 100%
2	Main spotlight 50%
3	Main spotlight 10%
4	Car spotlight
5	OFF

NOTE:


- If the switch is not touched for 3 seconds the next time it is pressed will switch it off.
- Emergency function: when the emergency function is used the main spotlight will shine at 10% power.

CHARGING THE BATTERY

- The battery must be charged before using for the first time.
- Connect the USB charger to the power supply.
- Connect the charger cord to the micro USB port.
- The battery charge status is shown on the battery indicator. When all four battery charging lights go on the battery is fully charged.

- The battery should be changed every three months to maintain its capacity.

Documents / Resources

	<p>anslut 008732 Work Lamp [pdf] Instruction Manual 008732, Work Lamp, 008732 Work Lamp</p>
---	---