



## anslut 016210 Battery-Powered Work Lamp LED Instruction Manual

[Home](#) » [anslut](#) » anslut 016210 Battery-Powered Work Lamp LED Instruction Manual 



Item no. 016210

BATTERY-POWERED WORK LAMP LED




#### OPERATING INSTRUCTIONS

**! Important!** Read the user instructions carefully before use. Save them for future reference. (Translation of the original instructions)

#### **Care for the environment!**

Recycle discarded products in accordance with local regulations. Julia reserves the right to make changes. For the latest version of operating instructions, see [www.jula.com](http://www.jula.com)

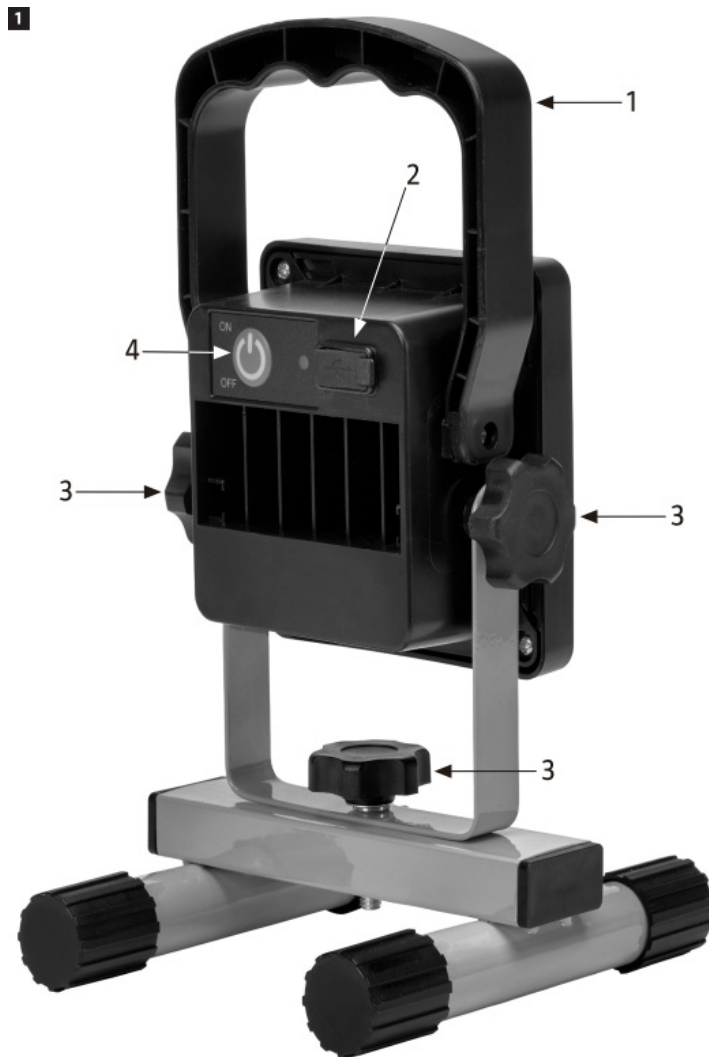

## Contents




- [1 SAFETY INSTRUCTIONS](#)
- [2 TECHNICAL DATA](#)
- [3 DESCRIPTION](#)
- [4 USE](#)
- [5 MAINTENANCE](#)
  - [5.1 STORAGE](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

## SAFETY INSTRUCTIONS

- Do not look directly into the work lamp when it is switched on. Never point the beam at the eyes of people or animals.
- Keep out of the reach of children.
- The product can be used indoors and outdoors, but must not be immersed in water or any other liquid.
- Do not charge the product outdoors.
- The switch must be in the off position when charging, otherwise, the product can be damaged.
- Do not cover the product when in use.
- Always unplug the charger and allow the product to cool before cleaning, or maintenance, and to reduce the risk of electric shock.

- Do not attempt to replace the integrated battery.
- The light source is not replaceable. Discard the product if the light source stops working.
- Do not use the product if the glass front is cracked or damaged. The product must be discarded if the glass front is cracked or damaged.
- Do not open or dismantle the product. The product does not have any parts that can be repaired by the user.
- Charge the battery as soon as possible after it has been discharged for the best functionality and life span.
- Do not touch the product until it has cooled.
- Keep the product at a safe distance from flammable materials and/or flammable surfaces.
- Make sure there is adequate ventilation to prevent overheating.

**SYMBOLS**

	Approved in accordance with the relevant directives.
	Do not use the product if the glass front is cracked or damaged.
	Recycle discarded products as electrical waste.

**TECHNICAL DATA**

Output	9 W
Battery	3.7 V Li-Ion
Luminous flux	700 l'm
Color temperature	4000 K
Diffusion angle	120°
Safety class	II
Protection rating	IP54
Battery capacity	2000 mAh
Battery life	2 h
Charging time	4 h
Ambient temperature	-5 — 40°C
Charging current, USB port	5 VDC, 1 A

## DESCRIPTION

1. Carry handle
2. Charging connector
3. Controls
4. Power switch

**FIG. 1**

## USE

- The battery must be fully charged before using the product for the first time.
- Charge the battery immediately when it becomes discharged.
- To avoid the battery becoming completely discharged, recharge it every three months even when the product is not in use.

## MAINTENANCE

Wipe the product with a dry, soft cloth when necessary.

## STORAGE


- Store the product out of the reach of children, in a stable and safe position, cool and dry. Avoid very hot or low temperatures.
- Protect the product from direct sunlight. If possible, store the product in the dark.

- Do not store the product in a plastic bag, this can cause the accumulation of moisture and damage the product.



JULA AB, BOX 363, SE-532 24 SKARA  
2022-02-03  
©Jula AB

Documents / Resources

	<p><a href="#">anslut 016210 Battery-Powered Work Lamp LED</a> [pdf] Instruction Manual 016210, Battery-Powered Work Lamp LED</p>
---	---