



# anslut 018799 Rechargeable Work Lamp Instruction Manual

[Home](#) » [anslut](#) » anslut 018799 Rechargeable Work Lamp Instruction Manual 

## Contents

- [1 anslut 018799 Rechargeable Work Lamp](#)
- [2 SAFETY INSTRUCTIONS](#)
- [3 SYMBOLS](#)
- [4 TECHNICAL DATA](#)
- [5 DESCRIPTION](#)
- [6 DIMENSIONS](#)
- [7 USE](#)
- [8 OUTPUT SETTINGS](#)
- [9 MAINTENANCE](#)
- [10 Documents / Resources](#)
- [11 Related Posts](#)



**anslut 018799 Rechargeable Work Lamp**








## **SAFETY INSTRUCTIONS**

Follow all the safety instructions, maintenance instructions and other instructions, including the technical data.

- The light source cannot be replaced. If the light source fails, the entire product must be replaced.
- Do not use the product if the glass cover is cracked or damaged.
- Only charge the battery with the supplied charger.
- The product is not waterproof when the charger is connected.
- Recycle used batteries in accordance with local regulations.
- The battery cannot be replaced.
- The product has insulation class III, and the charger insulation class II.
- Products with protection rating IP44 are splash proof and protected from solid objects with a diameter of more than 1 mm.
- Mains voltage 220–240 V, 50–60 Hz.
- Never modify the product in any way.
- Keep children and pets at a safe distance from electrical products.
- The product can be used in ambient temperatures from 10 to 45°C.
- Light products must not be put on a damp surface.
- Check after assembly and installation that no wires have been damaged.
- The manufacturer cannot accept liability for any damage resulting from failure to follow these instructions.

**SYMBOLS**

	Read the instructions.
	Approved in accordance with the relevant directives.
	Safety class III
	Work lamp for tough conditions.
	Recycle discarded product in accordance with local regulations.

**TECHNICAL DATA**


Output	20 W
Colour temperature	4000 K
Luminous flux	1500 lm – 750 lm – flash – off
Protection rating	IP54
Battery technique	Li-Ion
Battery capacity	7200 mAh
Battery life	3 h
Charging time	4 h
Voltage	3.7 V
Size	170 x 125 x 52 mm
Weight	700 g

## DESCRIPTION

Rechargeable, bright and approved for outdoor use work lamp with built-in battery and integrated LED bulbs. The lamp has three different output settings (via power switch) and a stand for easy positioning. The power switch and charging port are on the back of the lamp. The battery life is three hours and the charging time is four hours. The battery is charged with the supplied USB cable. USB charger sold separately.

## DIMENSIONS

FIG. 1

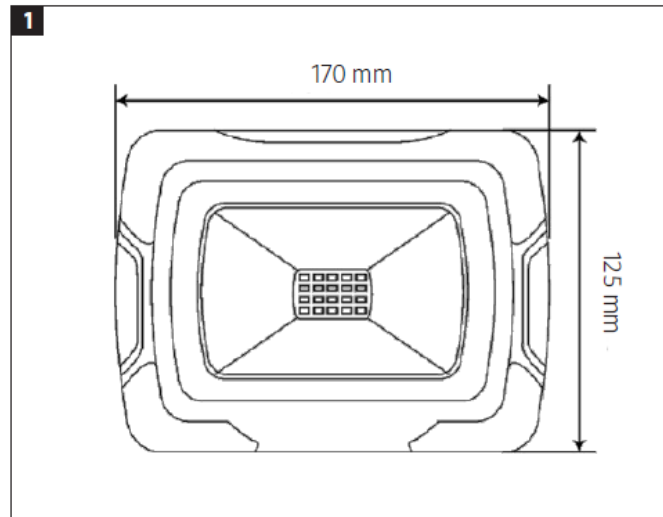

## USE

## CHARGING

FIG. 2



## OUTPUT SETTINGS

1. Press once: On / 100%
2. Press twice: 50%
3. Press three times: Flashes
4. Press four times: Off

FIG. 3



MAINTENANCE

The product does not contain any parts that can be repaired by the user. Wipe off any dust from the surface of the product with a soft cloth. Make sure that no liquid or moisture gets into the product or its electrical connections.

Documents / Resources

	<a href="#">anslut 018799 Rechargeable Work Lamp</a> [pdf] Instruction Manual 018799, Rechargeable Work Lamp, 018799 Rechargeable Work Lamp
	<a href="#">anslut 018799 Rechargeable Work Lamp</a> [pdf] Instruction Manual 018799 Rechargeable Work Lamp, 018799, Rechargeable Work Lamp, Work Lamp, Lamp